FLOOD INSURANCE STUDY

VOLUME 5 OF 23

MARICOPA COUNTY, ARIZONA
AND INCORPORATED AREAS

COMMUNITY NAME	COMMUNITY NUMBER
AVONDALE, CITY OF	040038
BUCKEYE, TOWN OF	040039
CAREFREE, TOWN OF	040126
CAVE CREEK, TOWN OF	040129
CHANDLER, CITY OF	040040
EL MIRAGE, CITY OF	040041
FOUNTAIN HILLS, TOWN OF	040135
GILA BEND, TOWN OF	040043
GILBERT, TOWN OF	040044
GLENDALE, CITY OF	040045
GOODYEAR, CITY OF	040046
GUADALUPE, TOWN OF	040111
LITCHFIELD PARK, CITY OF	040128
MARICOPA COUNTY (UNINCORPORATED AREAS)	040037
MESA, CITY OF	040048
PARADISE VALLEY, TOWN OF	040049
PEORIA, CITY OF	040050
PHOENIX, CITY OF	040051
QUEEN CREEK, TOWN OF	040132
SCOTTSDALE, CITY OF	045012
SURPRISE, CITY OF	040053
TEMPE, CITY OF	040054
TOLLESON, CITY OF	040055
WICKENBURG, TOWN OF	040056
YOUNGTOWN, TOWN OF	040057

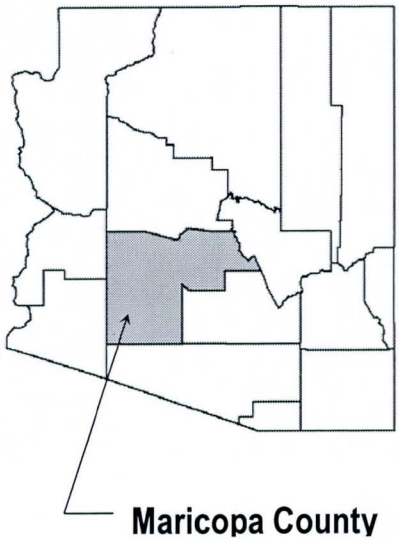

REVISED: OCTOBER 16, 2013

Federal Emergency Management Agency

FLOOD INSURANCE STUDY NUMBER
04013CV005B

1302.080

NOTICE TO
FLOOD INSURANCE STUDY USERS

Communities participating in the National Flood Insurance Program have established repositories of flood hazard data for floodplain management and flood insurance purposes. This Flood Insurance Study (FIS) report may not contain all data available within the Community Map Repository. Please contact the Community Map Repository for any additional data.

The Federal Emergency Management Agency (FEMA) may revise and republish part or all of this FIS report at any time. In addition, FEMA may revise part of this FIS report by Letter of Map Revision process, which does not involve republication or redistribution of the FIS report. Therefore, users should consult community officials and check the Community Map Repository to obtain the most current FIS report components.

Users should refer to Section 10.0, Revisions Description, for further information. Section 10.0 is intended to present the most up-to-date information for specific portions of this FIS report. Therefore, users of this report should be aware that the information presented in Section 10.0 supersedes information in Sections 1.0 through 9.0 of the FIS report.

Initial Countywide FIS Effective Date: April 15, 1988

Revised Countywide Dates: September 29, 1989
September 4, 1991
December 3, 1993
September 30, 1995
July 19, 2001
September 30, 2005
October 16, 2013

TABLE OF CONTENTS

VOLUME 1

Page

1.0 INTRODUCTION 1

1.1 Purpose of Study 1
1.2 Authority and Acknowledgments 1
1.3 Coordination 3

2.0 AREA STUDIED 3

2.1 Scope of Study 3
2.2 Community Description 20
2.3 Principal Flood Problems 22
2.4 Flood Protection Measures 27

3.0 ENGINEERING METHODS 28

3.1 Hydrologic Analyses 28

FIGURES

Figures 1-5 - Historic Flooding 24-26

TABLES

Table 1 - Detailed Study Sources 4
Table 2 - Approximate Study Streams 10
Table 3 - Summary of Discharges 31
Table 4 - Summary of Stillwater Elevations 125

TABLE OF CONTENTS (Continued)

VOLUME 2

Page

3.2 Hydraulic Analyses 126
3.3 Vertical Datum 136

4.0 FLOODPLAIN MANAGEMENT APPLICATIONS 137

4.1 Flood Boundaries 138
4.2 Floodways 138

FIGURES

Figure 6 - Floodway Schematic 140

TABLES

Table 5 - Range of Hydraulic Roughness Coefficients (Manning's "n") 128
Table 6 - Floodway Data (16 East McMicken-Centennial Wash) 141

VOLUME 3

TABLES - continued

Table 6 - Floodway Data (Cereus Wash-Moon Valley Wash) 217

VOLUME 4

TABLES - continued

Table 6 - Floodway Data (Morgan City Wash-Tributary X5) 338

VOLUME 5

TABLES - continued

Table 6 - Floodway Data (Trilby Wash-Yucca Flat Wash) 461

TABLE OF CONTENTS (Continued)

VOLUME 6

Page

5.0 INSURANCE APPLICATIONS 570

6.0 FLOOD INSURANCE RATE MAP 571

7.0 OTHER STUDIES 571

8.0 LOCATION OF DATA 576

9.0 BIBLIOGRAPHY AND REFERENCES 576

10.0 REVISION DESCRIPTIONS 587

10.1 First Revision 587
10.2 Second Revision 593
10.3 Third Revision 607
10.4 Fourth Revision 623
10.5 Fifth Revision 632
10.6 Sixth Revision 635
10.7 Seventh Revision 672

TABLES

Table 7 - Community Map History 573
Table 8 - Letters of Map Change (Revision 6) 660
Table 9 – Listed of Certified and Accredited Levees 674
Table 10 – Letters of Map Change (Revision 7) 678

TABLE OF CONTENTS (Continued)

VOLUME 7

EXHIBITS

Exhibit 1 - Flood Profiles

16 East (McMicken Wash)	Panels 01P-02P
191st Avenue Wash	Panels 03P-06P
ADOT U.S. 60 Channel	Panel 07P
Agua Fria River	Panels 08P-35P
Aguila Farm Channel	Panels 36P-40P
Amir Wash	Panels 41P-42P
Andora Hills Wash	Panels 43P-49P
Andora Hills Wash Split 1	Panel 50P
Andora Hills Wash Split 2	Panel 51P
Apache Wash	Panels 52P-61P
Apache Wash Split Flow Area	Panels 62P-63P
Apache Wash Tributary 1	Panels 64P-65P
Apache Wash Tributary 2	Panels 66P-68P
Apache Wash Tributary 3	Panel 69P
Apache Wash Tributary 4	Panels 70P-71P
Apache Wash Tributary 5	Panel 72P
Apache Wash Tributary 6	Panel 73P
Apache Wash Tributary 7	Panels 74P-75P
Apache Wash West Fork	Panels 76P-78P
Apache Wash West Fork Tributary 1	Panels 79P-80P
Apache Wash West Fork Tributary 2	Panel 81P
Arrow Wash	Panels 82P-84P
Ashbrook Wash	Panels 85P-88P
Atchison Topeka and Santa Fe Railroad Channel	Panels 89P-90P
Balboa Wash	Panels 91P-92P
Beardsley Canal Wash	Panels 93P-95P
Beardsley Wash North	Panels 96P-99P

TABLE OF CONTENTS (Continued)

VOLUME 8

EXHIBITS - continued

Exhibit 1 - Flood Profiles - continued

Beardsley Wash South	Panels 100P-106P
Beardsley Wash South Breakout	Panels 107P-108P
Bedrock Wash	Panels 109P-117P
Bedrock Wash North Fork	Panels 118P-121P
Bender Wash	Panels 122P-129P
Bender Wash North Tributary	Panels 130P-133P
Black Wash	Panel 134P
Blue Tank Wash	Panel 135P
Bonita Dike Channel	Panel 136P
Buchanan Wash	Panels 137P-138P
Buckeye Feeder Canal	Panels 139P-140P
Bullard Wash	Panels 141P-148P
Bullard Wash West Tributary	Panel 149P
Bulldozer Wash	Panels 150P-161P
Calamity Wash	Panels 162P-163P
Caliente Wash	Panels 164P-165P
Camelback Wash	Panels 166P-167P
Camp Creek Tributary A	Panels 168P-173P
Camp Creek Tributary A1	Panels 174P-176P
Camp Creek Tributary A2	Panels 177P-179P
Camp Creek Tributary B	Panels 180P-186P
Camp Creek Tributary B1	Panels 187P-189P
Camp Creek Tributary B2	Panels 190P-194P
Camp Creek Tributary C	Panels 195P-200P

TABLE OF CONTENTS (Continued)

VOLUME 9

EXHIBITS - continued

Exhibit 1 - Flood Profiles - continued

Camp Creek Tributary C1	Panels 201P-203P
Camp Creek Tributary C2	Panels 204P-206P
Camp Creek Tributary C3	Panels 207P-208P
Camp Creek Tributary D	Panels 209P-210P
Casandro Wash	Panels 211P-216P
Casandro Wash South Branch	Panels 217P-218P
Caterpillar Tank Wash	Panels 219P-223P
Cave Creek	Panels 224P-273P
Cave Creek Overflow Channel	Panel 274P
Cave Creek Tributary	Panel 275P
Cave Creek Tributary 1	Panels 276P-280P
Cave Creek Tributary 1A	Panel 281P
Cave Creek Tributary 1B	Panel 282P
Cave Creek Tributary 1C	Panel 283P
Cave Creek Tributary 1D	Panel 284P
Cave Creek Tributary Tributary	Panel 285P
Cave Creek Unnamed Central Tributary	Panels 286P-288P
Cave Creek Wash	Panels 289P-294P
Cemetery Wash	Panels 295P-300P

TABLE OF CONTENTS (Continued)

VOLUME 10

EXHIBITS - continued

Exhibit 1 - Flood Profiles - continued

Cemetery Wash Tributary R-1	Panels 301P-302P
Cemetery Wash Tributary R-2	Panels 303P-305P
Cemetery Wash Tributary R-3	Panel 306P
Centennial Wash	Panels 307P-325P
Centennial Wash Left Overbank	Panels 326P-333P
Centennial Wash North Branch	Panels 334P-335P
Cereus Wash	Panels 336P-338P
Cholla Wash	Panels 339P-356P
Cholla Wash North Fork	Panels 357P-360P
Chukar Wash	Panel 361P
Circle City Area Wash 1	Panels 362P-366P
Circle City Area Wash 2	Panels 367P-368P
Circle City Area Wash 2 Along Atchison, Topeka & Santa Fe Railway	Panels 369P-370P
Circle City Area Wash 3	Panels 371P-374P
Circle City Area Wash 4	Panels 375P-376P
Circle City Area Wash 4 Along Atchison, Topeka & Santa Fe Railway	Panel 377P
Circle City Area Wash 5	Panel 378P
Circle City Area Wash 6	Panels 379P-380P
Circle City Area Wash 7	Panels 381P-382P
Citrus Valley Wash	Panels 383P-384P
Cline Creek	Panels 385P-393P
Cline Creek Split 3	Panel 394P
Colony Wash	Panels 395P-396P

TABLE OF CONTENTS (Continued)

VOLUME 11

EXHIBITS - continued

Exhibit 1 - Flood Profiles - continued

Cottonwood Creek	Panels 397P-405P
Cottonwood Creek Tributary 1	Panels 406P-407P
Cottonwood Creek Tributary 2	Panels 408P-409P
Cyprus Point Wash	Panels 410P-411P
Daggs Wash	Panels 412P-422P
Daggs Wash East Split Flow	Panel 423P
Daggs Wash West Breakout	Panels 424P-425P
Dale Creek Wash	Panel 426P
Deadman Wash	Panels 427P-431P
Deadman Wash Stream No. 4	Panel 432P
Deadman Wash Stream No. 7	Panel 433P
Deadman Wash Stream No. 12	Panel 434P
Desert Hills Wash	Panels 435P-438P
Desert Hills Wash Tributary	Panel 439P
Desert Hills Wash Tributary 1	Panels 440P-441P
Desert Hills Wash Tributary 2	Panel 442P
Desert Hills Wash Tributary 3	Panel 443P
Desert Hills Wash Tributary 4	Panel 444P
Desert Hills Wash Tributary 5	Panel 445P
Desert Hills Wash Tributary 6	Panels 446P-447P
Desert Lake Wash	Panels 448P-451P
Desert Lake Wash East Fork	Panels 452P-454P
Desert Lake Wash Tributary 2	Panels 455P-456P
Diversion Dike Wash	Panels 457P-458P
Doe Peak Wash	Panels 459P-460P
Doe Peak Wash East Fork	Panels 461P-462P
Doe Peak Wash South Fork	Panels 463P-465P
Dreamy Draw Wash East	Panels 466P-467P
Dreamy Draw Wash West	Panel 468P
East Fork of Cave Creek	Panels 469P-471P
East Garambullo Wash	Panels 472P-473P
Eastern Canal East Embankment Flooding	Panels 474P-478P
Eastern Pima Wash	Panels 479P-480P
Echo Canyon Wash	Panels 481P-485P
Emerald Wash	Panels 486P-487P
Escalante Wash	Panel 488P
Evans Wash	Panels 489P-493P
Fan 6A	Panels 494P-495P

TABLE OF CONTENTS (Continued)

VOLUME 12

EXHIBITS – continued

Exhibit 1 - Flood Profiles - continued

Fan 6A North	Panels 496P-504P
Fan 6A South	Panels 505P-511P
Fan 6C	Panels 512P-514P
Fan 6C North Branch	Panel 515P
Flemming Springs Wash	Panels 516P-519P
Flying E Wash	Panels 520P-524P
Flynn Lane Wash	Panels 525P-526P
Fountain Channel	Panel 527P
Galloway Wash	Panels 528P-534P
Galloway Wash Middle Branch	Panels 535P-538P
Galloway Wash Middle Branch Tributary	Panel 539P
Galloway Wash North Tributary	Panels 540P-546P
Galloway Wash South Branch	Panels 547P-550P
Galloway Wash South Branch Split 1	Panel 551P
Galloway Wash Split 1	Panel 552P
Galloway Wash Split 2	Panel 553P
Galloway Wash Tributary 2	Panels 554P-556P
Galloway Wash Tributary 2A	Panel 557P
Galloway Wash Tributary 2B	Panel 558P
Galloway Wash Unnamed Tributary	Panels 559P-560P
Gila Bend Canal	Panel 561P
Gila River	Panels 562P-575P
Gila River (Below Gilliespie Dam)	Panels 576P-589P
Granite Falls Wash	Panel 590P
Granite Reef Wash	Panels 591P-592P
Grapevine Wash	Panels 593P-594P
Grass Wash	Panels 595P-597P
Greystone Wash	Panel 598P

TABLE OF CONTENTS (Continued)

VOLUME 13

EXHIBITS - continued

Exhibit 1 - Flood Profiles - continued

Hacker Wash	Panels 599P-604P
Hacker Wash Diversion	Panel 605P
Happy Valley Wash	Panel 606P
Hartman Wash	Panels 607P-611P
Hartman Wash Unnamed Tributary	Panel 612P
Hassayampa River	Panels 613P-635P
Hassayampa River Tributary 1E	Panels 636P-640P
Hassayampa River Tributary 1E1	Panels 641P-642P
Hassayampa River Tributary 3E	Panels 643P-644P
Hassayampa River Tributary 4E	Panels 645P-647P
Hassayampa River Tributary 4E Tributary	Panel 648P
Hassayampa River Tributary 4E West Fork	Panel 649P
Hesperus Wash	Panels 650P-651P
Holly Wash	Panel 652P
Hospital Wash	Panel 653P
I-8 Wash East	Panel 654P
I-8 Wash West	Panel 655P
Indian Bend Wash	Panels 656P-662P
Indian Bend Wash Low Flow Channel	Panels 663P-664P
Interstate 10 Wash	Panel 665P
Iona Stock Tank Wash	Panels 666P-667P
Iona Wash	Panels 668P-677P
Iona Wash East	Panels 678P-680P
Iona Wash East Split 1	Panels 681P-683P
Iona Wash East Split 2	Panels 684P-685P
Iona Wash North West Split	Panels 686P-688P
Iona Wash West	Panels 689P-691P
Jacklin Wash	Panel 692P
Jackrabbit Trail Wash	Panels 693P-696P

TABLE OF CONTENTS (Continued)

VOLUME 14

EXHIBITS - continued

Exhibit 1 - Flood Profiles - continued

Jackrabbit Wash	Panels 697P-711P
Jackrabbit Wash Unnamed Tributary	Panels 712P-717P
Jenny Lin Wash	Panels 718P-719P
Kingstree Wash	Panel 720P
Laser Drain	Panel 721P
Legend Wash	Panel 722P
Little San Domingo Wash	Panels 723P-726P
Logan Wash	Panel 727P
Lower El Mirage Wash	Panels 728P-730P
Lower El Mirage Wash Tributary	Panels 731P-732P
Luke Wash	Panels 733P-739P
Luke Wash East Main tributary	Panels 740P-743P
Luke Wash East Sub Tributary	Panels 744P-745P
Luke Wash Minor Tributary	Panels 746P-747P
Malta Drain	Panel 748P
Mangrum Wash	Panel 749P
Martinez Wash	Panel 750P
McCormick Ranch Lakes East Branch	Panel 751P
McCormick Ranch Lakes West Branch	Panel 752P
McMicken Dam Outlet Wash	Panels 753P-757P
Mesquite Tank Wash	Panels 758P-761P
Mockingbird Wash	Panels 762P-763P
Monarch Wash	Panels 764P-767P
Moon Valley Wash	Panels 768P-769P
Moon Valley Wash Diversion Channel	Panels 770P-771P
Moon Valley Wash North Branch	Panels 772P-776P
Moon Valley Wash North Split	Panels 777P-778P
Moon Valley Wash South Branch	Panels 779P-781P
Morgan City Wash	Panels 782P-791P
Mountain Wash	Panel 792P
Myrtle Avenue Wash	Panels 793P-794P

TABLE OF CONTENTS (Continued)

VOLUME 15

EXHIBITS - continued

Exhibit 1 - Flood Profiles - continued

New River	Panels 795P-810P
New River East Split	Panel 811P
New River Middle Split	Panels 812P-813P
New River West Split	Panels 814P-815P
New River West Tributary 5	Panels 816P-818P
New River West Tributary 10	Panels 819P-822P
New River West Tributary 15	Panels 823P-825P
New River West Tributary 20	Panels 826P-831P
New River West Tributary 20 Tributary 5	Panels 832P-833P
New River West Tributary 20 Tributary 10	Panels 834P-835P
New River West Tributary 25	Panels 836P-837P
New River West Tributary 30	Panels 838P-842P
New River West Tributary 35	Panels 843P-846P
New River West Tributary 40	Panels 847P-849P
New River West Tributary 45	Panels 850P-854P
New River West Tributary 50	Panels 855P-857P
New River West Tributary 50 Tributary 5	Panels 858P-859P
New River West Tributary 55	Panels 860P-865P
New River West Tributary 55 Tributary 5	Panels 866P-868P
New River West Tributary 55 Tributary 10	Panels 869P-876P
New River West Tributary 55 Tributary 15	Panels 877P-883P
New River West Tributary 55 Tributary 20	Panels 884P-885P
New River West Tributary 55 Tributary 30	Panels 886P-887P
North Colony Wash	Panel 888P
Ocotillo Wash	Panels 889P-896P
Ocotillo Wash Split 1	Panels 897P-898P
Ocotillo Wash Tributary 1	Panels 899P-901P
Ocotillo Wash Tributary 1A	Panels 902P-903P
Ocotillo Wash Tributary 2	Panels 904P-908P
Ocotillo Wash Tributary 2 Tributary 1	Panel 909P
Ocotillo Wash Tributary 3	Panels 910P-912P

TABLE OF CONTENTS (Continued)

VOLUME 16

EXHIBITS - continued

Exhibit 1 - Flood Profiles - continued

Ocotillo Wash Tributary 4	Panels 913P-915P
Ocotillo Wash Tributary 5	Panels 916P-917P
Ocotillo Wash Tributary 6	Panel 918P
Osborn Road Wash	Panels 919P-923P
Ox Wash	Panels 924P-925P
Oxford Wash	Panel 926P
Padelford Wash	Panels 927P-931P
Padelford Wash Split 1	Panels 932P-933P
Padelford Wash Split 2	Panels 934P-935P
Padelford Wash Split 3	Panels 936P-937P
Padelford Wash Split 4	Panel 938P
Padelford Wash Split 5	Panel 939P
Padelford Wash Tributary A	Panels 940P-941P
Padelford Wash Tributary B	Panel 942P
Padelford Wash Tributary C	Panels 943P-944P
Paradise Wash	Panels 945P-955P
Paradise Wash West Fork	Panels 956P-957P
Perryville Road Wash	Panels 958P-961P
Pioneer Cemetery Wash	Panels 962P-965P
Powder House Wash	Panels 966P-967P
Powder House Wash Tributary 1	Panel 968P
Powder House Wash Tributary 2	Panel 969P
Powder Wash	Panels 970P-971P
Powerline Wash	Panels 972P-979P
Prospect Wash	Panels 980P-981P
Pyrite Wash	Panel 982P
Queen Creek Wash	Panels 983P-985P
Queen Creek Wash (Above Higley Road)	Panel 986P
Quilotosa Wash	Panels 987P-988P
Quilotosa Wash East Split	Panel 989P
Rainbow Wash	Panels 990P-997P
Rainbow Wash Tributary	Panels 998P-999P
Ranieri Tank Wash	Panels 1000P-1001P
Ranieri Tank Wash Tributary 1	Panels 1002P-1003P
Ranieri Tank Wash Tributary 2	Panel 1004P
Ranieri Tank Wash Tributary 3	Panel 1005P

TABLE OF CONTENTS (Continued)

VOLUME 17

EXHIBITS - continued

Exhibit 1 - Flood Profiles - continued

Rattler Wash	Panels 1006P-1007P
Rawhide Wash	Panels 1008P-1015P
Rawhide Wash Tributary 1	Panels 1016P-1017P
Rawhide Wash Tributary 2	Panels 1018P-1020P
Rawhide Wash Tributary 3	Panel 1021P
Rawhide Wash Tributary 4	Panels 1022P-1024P
Rio Verde North Wash I	Panel 1025P
Rio Verde Wash 10	Panels 1026P-1035P
Rio Verde Wash 10 Split 4	Panels 1036P-1038P
Rio Verde Wash 10 Split 7	Panels 1039P-1040P
Rio Verde Wash 11	Panels 1041P-1050P
Rio Verde Wash 11 Split 1	Panels 1051P-1052P
Rio Verde Wash 11 Split 2	Panels 1053P-1054P
Rio Verde Wash 11 Split 8	Panels 1055P-1059P
Rio Verde Wash 12	Panels 1060P-1068P
Rio Verde Wash 12 Split 3	Panels 1069P-1071P
Rio Verde Wash 12 Split 6	Panels 1072P-1074P
Rio Verde Wash A	Panels 1075P-1080P
Rio Verde Wash A Split 1	Panels 1081P-1084P
Rio Verde Wash D	Panels 1085P-1086P
Rio Verde Wash F	Panels 1087P-1093P
Rock Springs Creek	Panels 1094P-1096P
Rodger Creek	Panels 1097P-1102P
Roosevelt Irrigation District Canal Split Flow	Panel 1103P
Rowe Wash	Panels 1104P-1112P

TABLE OF CONTENTS (Continued)

VOLUME 18

EXHIBITS - continued

Exhibit 1 - Flood Profiles - continued

Salt River	Panels 1113P-1128P
Salt River South Split	Panel 1129P
San Domingo Wash	Panels 1130P-1131P
Sand Tank Wash	Panels 1132P-1142P
Sauceda Wash	Panels 1143P-1144P
Scatter Wash	Panels 1145P-1149P
Scatter Wash North Branch	Panels 1150P-1153P
Scott Avenue Wash	Panels 1154P-1163P
Skunk Creek	Panels 1164P-1186P
Skunk Creek Breakout	Panel 1187P
Skunk Creek Tributary 6B	Panels 1188P-1189P
Skunk Creek Tributary 6B North	Panel 1190P
Skunk Creek Tributary 6C	Panels 1191P-1192P
Skunk Creek Tributary 10A	Panel 1193P
Skunk Creek Tributary 10B	Panels 1194P-1196P
Skunk Creek Tributary 12	Panels 1197P-1198P
Skunk Creek Tributary 27.161	Panel 1199P
Skunk Tank Wash	Panels 1200P-1203P
Skyline Wash	Panels 1204P-1205P

TABLE OF CONTENTS (Continued)

VOLUME 19

EXHIBITS - continued

Exhibit 1 - Flood Profiles - continued

Sols Wash	Panels 1206P-1213P
Sols Wash Tributary AH2	Panel 1214P
Sols Wash Tributary AH3	Panels 1215P-1218P
Sols Wash Tributary AH3 Unnamed Tributary	Panel 1219P
Sols Wash Tributary AH4	Panels 1220P-1221P
Sols Wash Tributary AH5	Panels 1222P-1226P
Sonoqui Wash	Panels 1227P-1229P
Sonoran Wash	Panels 1230P-1232P
Stagecoach Pass Wash	Panels 1233P-1245P
Stagecoach Pass Wash Unnamed Tributary	Panels 1246P-1247P
Star Wash	Panels 1248P-1265P
Star Wash Tributary A	Panels 1266P-1267P
Star Wash Tributary B	Panels 1268P-1270P
Star Wash Tributary C	Panels 1271P-1272P
Star Wash Tributary D	Panels 1273P-1276P
Sunburst Wash	Panel 1277P
Sunland Avenue Tributary	Panel 1278P
Sunny Cove Wash	Panel 1279P
Sunny Cove Wash (Upper Reach)	Panels 1280P-1282P
Sunset Wash	Panel 1283P
Sunset Wash Tributary	Panel 1284P
Sunset Wash (Upper Reach)	Panel 1285P
Sweat Canyon Wash	Panels 1286P-1290P
Sycamore Wash	Panel 1291P
Tank Wash	Panels 1292P-1296P
Tank Wash South Branch	Panel 1297P
Tenth Street Wash	Panels 1298P-1299P
Tractor Wash	Panels 1300P-1305P

TABLE OF CONTENTS (Continued)

VOLUME 20

EXHIBITS - continued

Exhibit 1 - Flood Profiles - continued

Tributary C6	Panels 1306P-1309P
Tributary C8	Panels 1310P-1316P
Tributary X1	Panels 1317P-1319P
Tributary X1 Overflow	Panel 1320P
Tributary X1 Splitflow	Panel 1321P
Tributary X2	Panels 1322P-1324P
Tributary X3	Panels 1325P-1327P
Tributary X4A	Panels 1328P-1329P
Tributary X4B	Panels 1330P-1331P
Tributary X5	Panels 1332P-1334P
Trilby Wash	Panels 1335P-1356P
Trilby Wash Middle Channel	Panel 1357P
Trilby Wash West Channel	Panel 1358P
Tulip Wash	Panel 1359P
Turtleback Wash	Panels 1360P-1361P
Tuthill Dike Wash	Panels 1362P-1371P
Twin Buttes Wash	Panels 1372P-1377P
Twin Peaks Wash	Panel 1378P
Union Pacific Railroad	Panels 1379P-1381P
Union Pacific Railroad Ditch	Panels 1382P-1384P
Unnamed Channel	Panel 1385P
Unnamed Wash No. 1	Panels 1386P-1392P
Unnamed Wash No. 2	Panels 1393P-1398P
Upper Boulders Wash	Panels 1399P-1406P
Upper Fan 5	Panels 1407P-1415P

TABLE OF CONTENTS (Continued)

VOLUME 21

EXHIBITS - continued

Exhibit 1 - Flood Profiles - continued

Valley Wash	Panels 1416P-1417P
Wagner Wash	Panels 1418P-1424P
Wagon Wash	Panel 1425P
Wash 1 East	Panels 1426P-1427P
Wash 1 West	Panels 1428P-1432P
Wash 2 East (North of the Central Arizona Project Canal)	Panels 1433P-1434P
Wash 2 East (South of the Central Arizona Project Canal)	Panels 1435P-1436P
Wash 2 East Tributary	Panels 1437P-1438P
Wash 2 West (North of the Central Arizona Project Canal)	Panels 1439P-1441P
Wash 2 West (South of the Central Arizona Project Canal)	Panels 1442P-1444P
Wash 2 West Tributary 1	Panels 1445P-1447P
Wash 2 West Tributary 2	Panels 1448P-1450P
Wash 3 East	Panels 1451P-1455P
Wash 3 West	Panels 1456P-1461P
Wash 4 East	Panels 1462P-1463P
Wash 5 East	Panels 1464P-1467P
Wash 6 East	Panels 1468P-1470P
Wash 6 East South	Panel 1471P
Wash 7 East	Panel 1472P
Wash 7 East East Split	Panels 1473P-1474P
Wash 7 East Tributary	Panels 1475P-1476P
Wash 7 East West Split	Panel 1477P
Wash 8 East	Panels 1478P-1480P
Wash 9	Panels 1481P-1484P
Wash 9 East	Panels 1485P-1492P
Wash 9 East Split	Panel 1493P
Wash 10 East	Panels 1494P-1497P
Wash 10 East Split 1	Panel 1498P
Wash 10 East Split 2	Panels 1499P-1500P
Wash 11 East	Panels 1501P-1510P
Wash 12 East	Panels 1511P-1514P
Wash 12 East Split	Panel 1515P

Exhibit 1 - Flood Profiles - continued

Wash 13 East	Panels 1516P-1518P
Wash 14 East	Panel 1519P
Wash AG	Panel 1520P
Wash B	Panels 1521P-1529P
Wash B Tributary	Panel 1530P
Wash E2	Panel 1531P
Wash F	Panel 1532P
Wash F2	Panel 1533P
Wash G	Panel 1534P
Wash H	Panels 1535P-1536P
Wash I	Panels 1537P-1538P
Wash K	Panels 1539P-1542P
Wash K1	Panel 1543P
Wash L	Panels 1544P-1545P
Wash O	Panels 1546P-1547P
Wash P	Panel 1548P
Wash Q	Panels 1549P-1551P
Wash S2	Panel 1552P
Wash T2N-R5W-S27N	Panels 1553P-1555P
Wash T4N-R2W-S09N	Panels 1556P-1557P
Wash T4N-R2W-S15N	Panels 1558P-1559P
Wash T4N-R3W-S07W	Panels 1560P-1561P
Wash T4N-R3W-S08E	Panels 1562P-1565P
Wash T4N-R3W-S08W	Panels 1566P-1568P
Wash T4N-R3W-S09W	Panels 1569P-1571P
Wash T4N-R3W-S10N	Panels 1572P-1573P
Wash T4N-R3W-S10W-Reach-1	Panel 1574P
Wash T4N-R3W-S10W-Reach-2	Panel 1575P
Wash T4N-R3W-S17	Panels 1576P-1578P
Wash T4N-R3W-S18E	Panels 1579P-1582P
Wash T4N-R3W-S18W	Panels 1583P-1586P
Wash T5N-R2W-S07	Panels 1587P-1588P
Wash T5N-R2W-S19E	Panels 1589P-1590P
Wash T5N-R2W-S19W	Panels 1591P-1594P
Wash T5N-R3W-S01S	Panel 1595P
Wash T5N-R3W-S19	Panel 1596P
Wash T5N-R3W-S24E	Panels 1597P-1599P
Waterfall Wash	Panels 1600P-1607P

TABLE OF CONTENTS (Continued)

VOLUME 23

EXHIBITS - continued

Exhibit 1 - Flood Profiles - continued

Waterman Wash	Panels 1608P-1620P
West Fork White Peak Wash	Panel 1621P
West Garambullo Wash	Panels 1622P-1623P
West Quilotosa Wash	Panels 1624P-1625P
West Split Flow Through El Mirage	Panels 1626P-1627P
White Granite Wash	Panels 1628P-1633P
White Granite Wash North Fork	Panels 1634P-1636P
White Peak Wash	Panels 1637P-1639P
White Tanks No. 3 Wash	Panels 1640P-1646P
White Tanks Wash	Panels 1647P-1653P
White Tanks Wash Tributary 1	Panels 1654P-1657P
Willow Springs Wash	Panels 1658P-1667P
Willow Springs Wash Tributary 1	Panels 1668P-1675P
Willow Springs Wash Tributary 1A	Panels 1676P-1679P
Willow Springs Wash Tributary 2	Panels 1680P-1683P
Willow Springs Wash Tributary 2A	Panels 1684P-1686P
Willow Springs Wash Tributary 4	Panels 1687P-1691P
Willow Springs Wash Tributary 5	Panels 1692P-1695P
Willow Springs Wash Tributary 5A	Panels 1696P-1698P
Willow Springs Wash Tributary 6	Panels 1699P-1701P
Willow Springs Wash Tributary 6A	Panel 1702P
Willow Springs Wash Tributary 6B	Panel 1703P
Willow Springs Wash Tributary 6C	Panel 1704P
Windmill Wash	Panels 1705P-1706P
Windmill Wash North Branch	Panels 1707P-1708P
Windmill Wash South Branch	Panel 1709P
Wittmann Wash	Panels 1710P-1721P
Wittmann Wash North Split	Panel 1722P
Wittmann Wash South Split	Panels 1723P-1724P
Wittmann Wash Tributary	Panels 1725P-1726P
Yucca Flat Wash	Panels 1727P-1728P

PUBLISHED SEPARATELY

Flood Insurance Rate Map Index
Flood Insurance Rate Map

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Trilby Wash								
A	17,741	1,251	4,235	2.8	1,360.0	1,360.0	1,360.3	0.3
B	19,198	1,260	4,134	2.8	1,368.5	1,368.5	1,369.3	0.8
C	20,898	1,180	3,701	3.2	1,378.3	1,378.3	1,378.8	0.5
D	22,572	984	3,751	3.1	1,386.3	1,386.3	1,387.3	1.0
E	24,705	1,114	3,620	3.2	1,396.1	1,396.1	1,396.7	0.6
F	27,546	1,160	3,368	3.5	1,409.3	1,409.3	1,410.1	0.8
G	29,272	850	3,488	3.3	1,419.3	1,419.3	1,419.9	0.6
H	30,835	1,135	3,694	3.1	1,427.7	1,427.7	1,428.0	0.3
I	32,736	1,460	4,479	2.6	1,438.9	1,438.9	1,439.3	0.4
J	35,086	1,990	5,825	2.0	1,450.0	1,450.0	1,450.3	0.3
K	37,668	1,208	4,026	1.8	1,462.8	1,462.8	1,463.8	1.0
L	39,125	640	2,055	1.6	1,470.5	1,470.5	1,471.4	0.9
M	40,994	515	1,077	3.2	1,480.1	1,480.1	1,480.3	0.2
N	42,625	420	1,004	3.5	1,488.7	1,488.7	1,489.2	0.5
O	43,813	395	967	3.6	1,494.1	1,494.1	1,494.5	0.4
P	45,065	340	976	3.6	1,500.2	1,500.2	1,500.7	0.5
Q	46,733	305	1,031	3.4	1,508.5	1,508.5	1,508.9	0.4
R	48,117	225	880	4.0	1,514.6	1,514.6	1,515.1	0.5
S	49,643	205	765	4.8	1,522.7	1,522.7	1,523.2	0.5
T	50,947	190	935	4.0	1,528.6	1,528.6	1,529.0	0.4
U	52,267	205	834	4.5	1,535.4	1,535.4	1,536.0	0.6
V	53,175	145	850	4.4	1,540.3	1,540.3	1,541.0	0.7
W	54,294	155	686	5.5	1,544.9	1,544.9	1,545.5	0.6
X	55,144	135	862	4.5	1,547.9	1,547.9	1,548.5	0.6
Y	55,297	159	662	5.8	1,550.9	1,550.9	1,550.9	0.0
Z	55,588	170	649	5.9	1,552.9	1,552.9	1,553.0	0.1

[1]Stream Distance in Feet Above McMicken Dam Outlet Works

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Trilby Wash (Cont'd)								
AA	56,818	179	716	5.4	1,559.9	1,559.9	1,560.1	0.2
AB	57,790	256	1,096	3.5	1,566.3	1,566.3	1,566.3	0.0
AC	58,703	175	835	4.6	1,569.8	1,569.8	1,570.8	1.0
AD	59,933	157	743	5.1	1,577.3	1,577.3	1,577.8	0.5
AE	61,005	156	611	6.2	1,583.1	1,583.1	1,583.2	0.1
AF	61,713	144	655	5.8	1,587.5	1,587.5	1,588.1	0.6
AG	62,367	180	480	7.8	1,591.2	1,591.2	1,591.2	0.0
AH	63,582	132	484	7.8	1,599.5	1,599.5	1,599.8	0.3
AI	64,675	176	631	5.9	1,606.7	1,606.7	1,607.1	0.4
AJ	65,916	164	466	8	1,615.6	1,615.6	1,615.8	0.2
AK	67,241	168	480	7.7	1,626.3	1,626.3	1,626.7	0.4
AL	68,640	126	431	8.6	1,636.5	1,636.5	1,636.5	0.0
AM	69,817	701	1,220	3	1,646.8	1,646.8	1,647.0	0.2
AN	70,942	420	1,149	3.2	1,656.7	1,656.7	1,657.0	0.3
AO	72,288	426	773	4.8	1,665.3	1,665.3	1,665.4	0.1
AP	73,455	539	1,214	3.1	1,673.2	1,673.2	1,673.8	0.6
AQ	74,585	452	899	4.1	1,681.5	1,681.5	1,681.7	0.2
AR	76,016	301	675	4.9	1,693.5	1,693.5	1,693.5	0.0
AS	77,384	156	557	6	1,703.9	1,703.9	1,704.3	0.4
AT	78,387	232	800	4.2	1,711.7	1,711.7	1,712.3	0.6
AU	79,438	252	711	4.3	1,720.1	1,720.1	1,720.7	0.6
AV	80,773	167	528	5.7	1,732.0	1,732.0	1,732.3	0.3
AW	82,268	414	919	3.3	1,744.1	1,744.1	1,744.8	0.7
AX	83,155	364	217	5.3	1,753.7	1,753.7	1,753.7	0.0
AY	83,947	418	471	2.4	1,763.1	1,763.1	1,763.3	0.2
AZ	85,077	319	535	3.3	1,776.5	1,776.5	1,776.7	0.2

[1]Stream Distance in Feet Above McMicken Dam Outlet Works

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Trilby Wash (Cont'd)								
BA	85,826	154	535	5.6	1,785.4	1,785.4	1,785.8	0.4
BB	87,020	210	775	3.9	1,799.2	1,799.2	1,800.0	0.8
BC	88,250	124	402	7.4	1,812.7	1,812.7	1,812.7	0.0
BD	89,427	66	275	10.9	1,825.3	1,825.3	1,825.3	0.0
BE	90,473	91	324	9.2	1,837.4	1,837.4	1,837.4	0.0
BF	91,444	95	414	6.7	1,848.4	1,848.4	1,848.9	0.5
BG	92,273	147	670	4.2	1,856.9	1,856.9	1,856.9	0.0
BH	92,807	200	415	7.2	1,863.4	1,863.4	1,863.4	0.0
BI	93,789	230	471	6.3	1,876.2	1,876.2	1,876.2	0.0
BJ	95,072	150	369	8.1	1,889.7	1,889.7	1,889.7	0.0
BK	96,429	195	562	5.3	1,905.5	1,905.5	1,905.5	0.0
BL	97,902	145	530	5.6	1,924.7	1,924.7	1,924.7	0.0
BM	98,784	414	803	7.4	1,938.1	1,938.1	1,938.7	0.6
BN	99,095	392	851	6.9	1,943.5	1,943.5	1,944.0	0.5
BO	99,931	267	690	8.6	1,954.3	1,954.3	1,955.0	0.7
BP	101,585	259	739	8	1,976.5	1,976.5	1,977.5	1.0
BQ	101,893	304	767	7.7	1,979.9	1,979.9	1,980.0	0.1
BR	102,929	302	762	7.7	1,993.5	1,993.5	1,994.4	0.9

[1]Stream Distance in Feet Above McMicken Dam Outlet Works

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Trilby Wash Middle Channel								
A	84,031	152	183	3.3	1,762.0	1,762.0	1,762.4	0.4
B	84,749	168	210	2.9	1,771.6	1,771.6	1,771.8	0.2
Trilby Wash West Channel								
A	83,181	209	449	4.2	1,752.5	1,752.5	1,752.5	0.0
B	84,248	240	418	3.0	1,762.1	1,762.1	1,762.4	0.3
C	85,209	118	229	5.4	1,775.1	1,775.1	1,775.4	0.3
BA	86,096	154	500	6.0	1,785.4	1,785.4	1,785.6	0.2

[1]Stream Distance in Feet Above McMicken Dam Outlet Works

TABLE 6

FEDERAL EMERGENCY MANAGEMENT AGENCY

MARICOPA COUNTY, AZ AND INCORPORATED AREAS

FLOODWAY DATA

TRILBY WASH MIDDLE CHANNEL - TRILBY WASH WEST CHANNEL

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Tulip Wash								
A	517	33	81	7.9	1,689.6	1,689.6	1,689.6	0.0
B	1,417	40	137	4.7	1,706.4	1,706.4	1,706.4	0.0
C	2,261	55	217	2.1	1,718.8	1,718.8	1,718.8	0.0

[1]Stream Distance in Feet Above Confluence With Legend Wash

TABLE 6

FEDERAL EMERGENCY MANAGEMENT AGENCY

MARICOPA COUNTY, AZ AND INCORPORATED AREAS

FLOODWAY DATA

TULIP WASH

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Turtleback Wash								
A	1,676	185	665	7.8	2,010.2	2,010.2	2,010.2	0.0
B	2,407	323	1,409	3.7	2,023.6	2,023.6	2,023.6	0.0
C	3,062	205	774	6.7	2,035.7	2,035.7	2,035.7	0.0
D	4,082	210	712	7.3	2,050.1	2,050.1	2,050.1	0.0
E	5,097	232	778	6.7	2,067.5	2,067.5	2,067.5	0.0
F	6,069	153	552	8.6	2,085.0	2,085.0	2,085.0	0.0
G	7,207	172	783	6.0	2,110.3	2,110.3	2,110.3	0.0
H	8,419	299	756	6.2	2,130.7	2,130.7	2,130.7	0.0
I	9,871	235	644	6.9	2,158.0	2,158.0	2,158.0	0.0
J	10,719	190	562	7.8	2,173.5	2,173.5	2,173.5	0.0
K	11,420	195	629	7.0	2,187.2	2,187.2	2,187.2	0.0

[1]Stream Distance in Feet Above Confluence With Hassayampa River

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Tuthill Dike Wash								
A	982	113	391	10.4	1,045.8	1,045.8	1,045.8	0.0
B	1,658	135	498	8.2	1,050.1	1,050.1	1,050.2	0.1
C	3,849	67	511	7.9	1,068.3	1,068.3	1,068.5	0.2
D	5,634	47	289	14.0	1,085.8	1,085.8	1,085.8	0.0
E	6,653	238	772	8.5	1,099.0	1,099.0	1,099.0	0.0
F	9,029	89	472	13.1	1,132.9	1,132.9	1,132.9	0.0
G	11,125	143	561	11.6	1,158.6	1,158.6	1,158.6	0.0
H	13,501	158	566	10.8	1,183.6	1,183.6	1,183.6	0.0
I	15,470	96	307	9.8	1,199.7	1,199.7	1,199.7	0.0
J	17,070	138	573	5.2	1,210.1	1,210.1	1,210.1	0.0
K	19,172	55	151	9.4	1,224.0	1,224.0	1,224.0	0.0
L	21,152	61	143	8.8	1,251.5	1,251.5	1,251.5	0.0
M	23,100	98	215	5.9	1,276.1	1,276.1	1,276.3	0.2
N	24,948	100	163	6.8	1,287.1	1,287.1	1,287.1	0.0

[1]Stream Distance in Feet Above White Tanks Structure #4

TABLE 6

FEDERAL EMERGENCY MANAGEMENT AGENCY

MARICOPA COUNTY, AZ AND INCORPORATED AREAS

FLOODWAY DATA

TUTHILL DIKE WASH

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Twin Buttes Wash								
A	998	105	288	9.5	1,244.2	1,244.2	1,244.2	0.0
B	1,500	112	345	7.9	1,249.8	1,249.8	1,249.8	0.0
C	1,996	158	385	7.1	1,254.0	1,254.0	1,254.2	0.2
D	2,497	136	328	8.4	1,259.1	1,259.1	1,259.2	0.1
E	2,999	192	380	7.2	1,265.5	1,265.5	1,265.5	0.0
F	3,495	103	312	8.8	1,270.4	1,270.4	1,270.6	0.2
G	3,997	224	416	6.6	1,274.9	1,274.9	1,275.1	0.2
H	4,499	103	390	7.0	1,277.3	1,277.3	1,277.9	0.6
I	5,000	109	289	9.5	1,282.8	1,282.8	1,282.8	0.0
J	5,496	125	415	6.6	1,287.4	1,287.4	1,287.5	0.1
K	5,998	224	380	7.2	1,292.2	1,292.2	1,292.2	0.0
L	6,500	392	698	3.9	1,295.4	1,295.4	1,295.8	0.4
M	6,985	254	551	5.0	1,297.4	1,297.4	1,298.3	0.9
N	7,498	145	423	6.5	1,302.2	1,302.2	1,302.3	0.1
O	7,999	184	518	5.3	1,305.3	1,305.3	1,306.1	0.8
P	8,496	63	321	8.6	1,308.4	1,308.4	1,309.4	1.0
Q	8,997	103	530	5.2	1,312.9	1,312.9	1,312.9	0.0
R	9,499	161	502	5.5	1,315.0	1,315.0	1,315.5	0.5
S	9,699	132	427	6.4	1,317.1	1,317.1	1,317.1	0.0
T	10,095	231	693	4.0	1,320.2	1,320.2	1,320.4	0.2
U	10,116	240	644	4.3	1,320.3	1,320.3	1,320.5	0.2
V	10,497	230	549	5.1	1,323.3	1,323.3	1,323.6	0.3
W	10,998	168	512	5.4	1,326.2	1,326.2	1,327.2	1.0
X	11,415	124	411	6.8	1,328.3	1,328.3	1,329.3	1.0
Y	11,996	59	307	9.1	1,332.6	1,332.6	1,333.3	0.7
Z	12,498	148	520	5.3	1,336.5	1,336.5	1,336.9	0.4

[1]Stream Distance in Feet Above Confluence With Agua Fria River

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Twin Buttes Wash (Cont'd)								
AA	12,999	174	406	6.9	1,339.9	1,339.9	1,339.9	0.0
AB	13,496	132	548	5.1	1,342.7	1,342.7	1,342.8	0.1
AC	13,997	73	295	9.4	1,344.6	1,344.6	1,344.6	0.0
AD	14,499	119	443	6.3	1,349.0	1,349.0	1,349.1	0.1
AE	14,995	97	322	8.6	1,352.3	1,352.3	1,352.3	0.0
AF	15,502	90	396	7.0	1,355.9	1,355.9	1,356.1	0.2
AG	15,988	120	448	6.2	1,358.2	1,358.2	1,358.4	0.2
AH	16,489	104	364	7.6	1,360.2	1,360.2	1,360.4	0.2
AI	16,996	121	334	8.3	1,363.3	1,363.3	1,363.4	0.1
AJ	17,493	79	343	8.1	1,366.3	1,366.3	1,366.4	0.1
AK	17,984	144	327	8.5	1,369.5	1,369.5	1,369.8	0.3
AL	18,306	259	730	3.8	1,371.5	1,371.5	1,372.2	0.7
AM	18,506	191	581	4.8	1,371.9	1,371.9	1,372.7	0.8
AN	19,003	154	347	7.0	1,374.7	1,374.7	1,375.1	0.4
AO	19,499	138	396	6.1	1,379.4	1,379.4	1,379.4	0.0
AP	19,995	147	338	7.2	1,382.6	1,382.6	1,382.6	0.0
AQ	20,497	122	377	6.4	1,386.0	1,386.0	1,386.1	0.1
AR	20,999	154	406	6.0	1,389.7	1,389.7	1,389.8	0.1
AS	21,500	223	483	5.0	1,393.7	1,393.7	1,393.8	0.1
AT	21,996	248	605	4.0	1,396.0	1,396.0	1,396.1	0.1
AU	22,498	109	268	9.0	1,399.1	1,399.1	1,399.1	0.0
AV	23,000	283	685	3.5	1,403.4	1,403.4	1,403.7	0.3
AW	23,496	174	405	6.0	1,406.1	1,406.1	1,406.6	0.5
AX	23,998	126	310	7.8	1,411.5	1,411.5	1,411.7	0.2
AY	24,499	344	748	3.2	1,414.6	1,414.6	1,415.2	0.6
AZ	24,996	371	402	6.0	1,418.3	1,418.3	1,418.3	0.0

[1]Stream Distance in Feet Above Confluence With Agua Fria River

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Twin Buttes Wash (Cont'd)								
BA	25,296	239	501	4.3	1,421.9	1,421.9	1,422.4	0.5
BB	25,999	268	430	5.0	1,427.9	1,427.9	1,428.5	0.6
BC	26,495	256	494	4.4	1,432.6	1,432.6	1,433.5	0.9
BD	26,748	139	325	6.7	1,435.5	1,435.5	1,435.9	0.4
BE	26,997	120	369	5.9	1,437.9	1,437.9	1,438.5	0.6
BF	27,498	83	252	8.6	1,443.0	1,443.0	1,443.0	0.0
BG	28,000	102	388	5.6	1,446.7	1,446.7	1,446.7	0.0
BH	28,496	122	258	8.4	1,450.2	1,450.2	1,450.2	0.0
BI	28,998	128	315	6.9	1,455.8	1,455.8	1,455.8	0.0
BJ	29,499	108	249	8.7	1,461.9	1,461.9	1,461.9	0.0
BK	29,996	137	364	5.9	1,467.7	1,467.7	1,468.0	0.3
BL	30,497	213	518	4.2	1,471.4	1,471.4	1,471.4	0.0
BM	30,999	116	283	7.6	1,474.4	1,474.4	1,474.7	0.3
BN	31,495	92	282	7.7	1,479.3	1,479.3	1,479.8	0.5
BO	31,997	116	256	8.4	1,485.3	1,485.3	1,485.3	0.0
BP	32,498	59	266	8.1	1,489.0	1,489.0	1,489.2	0.2
BQ	33,000	54	198	10.9	1,495.0	1,495.0	1,495.0	0.0
BR	33,496	93	306	7.1	1,502.8	1,502.8	1,502.8	0.0
BS	33,702	82	227	9.5	1,508.0	1,508.0	1,508.0	0.0

[1]Stream Distance in Feet Above Confluence With Agua Fria River

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Twin Peaks Wash								
A	520	233	355	5.9	2,421.1	2,421.1	2,421.1	0.0
B	2,030	93	328	6.4	2,436.3	2,436.3	2,436.8	0.5
C	3,530	129	327	6.4	2,454.5	2,454.5	2,455.0	0.5
D	4,570	123	333	6.3	2,465.3	2,465.3	2,465.5	0.2
E	5,520	170	361	5.8	2,476.8	2,476.8	2,476.8	0.0
F	7,090	70	237	8.9	2,498.3	2,498.3	2,498.3	0.0
G	8,550	92	269	7.8	2,517.4	2,517.4	2,517.4	0.0
H	9,515	68	230	9.1	2,531.9	2,531.9	2,531.9	0.0
I	10,525	122	246	6.7	2,545.4	2,545.4	2,545.4	0.0
J	11,525	61	192	8.6	2,555.1	2,555.1	2,555.1	0.0

[1]Stream Distance in Feet Above Confluence With Yucca Flat Wash

TABLE 6

FEDERAL EMERGENCY MANAGEMENT AGENCY

MARICOPA COUNTY, AZ AND INCORPORATED AREAS

FLOODWAY DATA

TWIN PEAKS WASH

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Unnamed Wash No.1								
A	342	37	135	6.7	748.1 [2]	744.2	745.2	1.0
B	1,779	235	566	2.1	748.1 [2]	747.2	748.2	1.0
C	4,060	130	400	2.0	759.9	759.9	760.0	0.1
D	6,077	180	206	3.1	770.2	770.2	770.4	0.2
E	8,131	100	146	4.2	783.5	783.5	783.6	0.1
F	9,097	60	99	5.5	790.3	790.3	790.7	0.4
G	10,143	42	94	5.1	797.9	797.9	797.9	0.0
H	11,231	56	73	5.5	805.6	805.6	805.6	0.0
I	12,339	35	67	4.9	814.8	814.8	815.3	0.5
J	13,543	30	34	4.1	823.2	823.2	823.4	0.2
K	14,499	30	45	1.8	834.2	834.2	834.3	0.1
L	15,502	26	28	2.7	838.4	838.4	838.5	0.1
M	16,262	15	10	3.6	844.4	844.4	844.5	0.1
N	16,621	27	59	1.3	850.7	850.7	850.7	0.0
O	17,213	15	10	4.8	854.2	854.2	854.2	0.0

[1]Stream Distance in Feet Above Confluence With Bender Wash

[2]Elevations are Influenced by the Backwater Effects of Sand Tank Wash.

TABLE 6

FEDERAL EMERGENCY MANAGEMENT AGENCY

MARICOPA COUNTY, AZ AND INCORPORATED AREAS

FLOODWAY DATA

UNNAMED WASH NO. 1

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Unnamed Wash No. 2								
A	1,014	384	1,009	0.9	748.1 [2]	747.2	748.2	1.0
B	3,569	75	103	6.8	764.0	764.0	764.3	0.3
C	5,528	131	139	5.6	778.5	778.5	779.0	0.5
D	6,547	118	154	4.6	786.5	786.5	787.2	0.7
E	7,672	122	189	3.7	791.7	791.7	792.7	1.0
F	8,849	684	170	4.3	800.8	800.8	800.8	0.0
G	10,058	83	117	5.7	807.9	807.9	808.6	0.7
H	11,289	113	176	3.5	815.2	815.2	816.1	0.9
I	12,329	60	88	6.5	822.9	822.9	822.9	0.0
J	13,380	38	95	5.5	831.1	831.1	831.7	0.6
K	14,657	46	72	6.4	840.7	840.7	841.2	0.5

[1]Stream Distance in Feet Above Confluence With Unnamed Wash No.1

[2]Elevation is Influenced by Backwater Effects of Sand Tank Wash and Unnamed Wash No. 1.

TABLE 6

FEDERAL EMERGENCY MANAGEMENT AGENCY

MARICOPA COUNTY, AZ AND INCORPORATED AREAS

FLOODWAY DATA

UNNAMED WASH NO. 2

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Upper Boulders Wash								
A	3,010	177	282	6.4	2,325.3	2,325.3	2,325.4	0.1
B	3,485	94	211	8.6	2,332.9	2,332.9	2,332.9	0.0
C	4,171	48	160	10.4	2,351.1	2,351.1	2,351.5	0.4
D	5,122	40	151	11.0	2,369.6	2,369.6	2,370.1	0.5
E	5,544	100	206	8.1	2,379.6	2,379.6	2,380.4	0.8
F	6,494	98	200	8.1	2,398.0	2,398.0	2,398.0	0.0
G	7,445	88	192	8.5	2,417.6	2,417.6	2,418.1	0.5
H	8,184	43	154	9.5	2,429.5	2,429.5	2,429.6	0.1
I	9,082	106	190	7.7	2,447.5	2,447.5	2,447.5	0.0
J	10,138	103	190	7.7	2,465.9	2,465.9	2,465.9	0.0
K	11,827	75	213	6.8	2,495.7	2,495.7	2,496.3	0.6
L	12,883	41	132	9.6	2,517.3	2,517.3	2,517.8	0.5
M	13,464	57	160	7.9	2,527.3	2,527.3	2,527.5	0.2
N	14,784	83	181	7.0	2,555.8	2,555.8	2,555.8	0.0
O	15,206	35	128	9.9	2,563.4	2,563.4	2,563.6	0.2
P	16,421	22	34	7.1	2,580.7	2,580.7	2,580.7	0.0
Q	17,054	30	46	5.2	2,592.6	2,592.6	2,592.7	0.1
R	18,110	29	39	6.2	2,611.4	2,611.4	2,611.4	0.0
S	18,480	65	67	3.6	2,617.3	2,617.3	2,617.4	0.1
T	19,906	47	43	5.5	2,642.3	2,642.3	2,642.3	0.0
U	20,803	57	62	3.9	2,658.7	2,658.7	2,658.8	0.1

[1]Stream Distance in Feet Above Scottsdale Road

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Upper Fan 5								
A	-370	159	300	6.7	2,402.3	2,402.3	2,402.3	0.0
B	950	97	250	8.1	2,423.0	2,423.0	2,423.2	0.2
C	2,746	79	157	7.9	2,453.8	2,453.8	2,453.8	0.0
D	3,221	36	119	10.4	2,463.8	2,463.8	2,463.8	0.0
E	4,488	122	201	6.2	2,484.9	2,484.9	2,484.9	0.0
F	5,280	82	157	7.9	2,499.4	2,499.4	2,499.5	0.1
G	5,491	43	126	9.8	2,505.5	2,505.5	2,505.5	0.0
H	6,970	105	170	7.3	2,531.5	2,531.5	2,531.5	0.0
I	7,603	73	151	8.2	2,542.8	2,542.8	2,542.8	0.0
J	8,237	108	172	7.2	2,552.9	2,552.9	2,553.8	0.9
K	8,765	127	181	6.9	2,564.2	2,564.2	2,564.2	0.0
L	10,454	138	257	4.8	2,591.5	2,591.5	2,592.0	0.5
M	10,718	50	171	7.3	2,597.5	2,597.5	2,597.5	0.0
N	11,088	57	140	8.9	2,602.2	2,602.2	2,602.2	0.0
O	13,147	103	176	5.6	2,635.9	2,635.9	2,635.9	0.0
P	14,098	65	124	7.9	2,653.4	2,653.4	2,653.9	0.5
Q	14,309	90	198	4.9	2,656.0	2,656.0	2,656.6	0.6
R	15,154	51	129	7.6	2,672.7	2,672.7	2,672.8	0.1
S	16,051	141	199	4.9	2,688.7	2,688.7	2,689.1	0.4
T	16,421	110	148	6.6	2,697.3	2,697.3	2,697.4	0.1
U	17,160	117	176	5.6	2,707.5	2,707.5	2,708.3	0.8
V	18,058	57	135	7.3	2,723.7	2,723.7	2,724.4	0.7
W	20,064	67	104	3.9	2,754.8	2,754.8	2,755.2	0.4

[1]Stream Distance in Feet Above Pima Road

TABLE 6

FEDERAL EMERGENCY MANAGEMENT AGENCY

MARICOPA COUNTY, AZ AND INCORPORATED AREAS

FLOODWAY DATA

UPPER FAN 5

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Valley Wash								
A	755	247	682	2.3	1,796.1	1,796.1	1,796.8	0.7
B	1,595	179	342	2.4	1,798.4	1,798.4	1,799.4	1.0
C	2,191	172	311	2.6	1,801.5	1,801.5	1,802.5	1.0

[1]Stream Distance in Feet Above Confluence With Skunk Tank Wash

TABLE 6

FEDERAL EMERGENCY MANAGEMENT AGENCY

MARICOPA COUNTY, AZ AND INCORPORATED AREAS

FLOODWAY DATA

VALLEY WASH

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Wagner Wash								
A	1,135	540	2,426	6.5	1,259.3	1,259.3	1,260.3	1.0
B	2,508	511	2,063	7.6	1,278.0	1,278.0	1,278.6	0.6
C	3,881	322	1,645	9.6	1,294.5	1,294.5	1,295.0	0.5
D	5,354	509	2,129	7.4	1,311.9	1,311.9	1,312.8	0.9
E	6,568	476	1,860	8.4	1,325.2	1,325.2	1,325.6	0.4
F	7,994	214	1,217	12.9	1,341.0	1,341.0	1,341.0	0.0
G	9,467	462	1,808	8.5	1,352.5	1,352.5	1,352.9	0.4
H	10,956	540	2,525	6.1	1,364.9	1,364.9	1,365.8	0.9
I	12,440	650	2,387	6.4	1,376.1	1,376.1	1,377.0	0.9
J	13,960	600	2,065	6.2	1,387.7	1,387.7	1,388.0	0.3
K	15,460	500	1,628	7.6	1,398.5	1,398.5	1,399.1	0.6
L	16,965	625	1,777	7.0	1,409.1	1,409.1	1,409.3	0.2
M	18,427	650	2,233	5.5	1,418.0	1,418.0	1,418.9	0.9
N	19,668	625	2,159	5.1	1,425.6	1,425.6	1,426.6	1.0
O	21,294	450	1,834	6.0	1,435.5	1,435.5	1,436.3	0.8
P	22,144	647	913	11.3	1,439.7	1,439.7	1,439.7	0.0
Q	22,308	798	1,591	6.5	1,442.8	1,442.8	1,442.8	0.0
R	23,839	400	1,752	5.9	1,450.5	1,450.5	1,451.1	0.6
S	25,312	330	1,626	5.5	1,457.9	1,457.9	1,458.7	0.8
T	26,796	300	1,466	6.1	1,465.7	1,465.7	1,466.4	0.7
U	28,280	250	1,244	6.5	1,473.8	1,473.8	1,474.2	0.4
V	29,753	270	1,305	6.2	1,481.2	1,481.2	1,481.9	0.7
W	31,231	250	1,058	6.8	1,489.4	1,489.4	1,490.0	0.6
X	32,710	250	1,194	5.6	1,496.0	1,496.0	1,496.9	0.9
Y	33,766	80	589	5.8	1,499.5	1,499.5	1,500.2	0.7
Z	33,924	200	416	8.3	1,501.4	1,501.4	1,501.9	0.5

[1]Stream Distance in Feet Above Confluence With Hassayampa River

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Wagner Wash (Cont'd)								
AA	34,917[1]	200	906	3.8	1,504.2	1,504.2	1,504.6	0.4
AB	36,400[1]	250	807	4.3	1,511.1	1,511.1	1,511.9	0.8
AC	37,567[1]	225	590	4.9	1,516.3	1,516.3	1,516.6	0.3
AD	38,481[1]	200	653	4.4	1,518.8	1,518.8	1,519.4	0.6
AE	39,009[1]	200	1,029	2.8	1,523.7	1,523.7	1,524.1	0.4
AF	40,318[1]	293	1,201	2.4	1,527.6	1,527.6	1,528.3	0.7
AG	41,701[1]	420	1,348	2.1	1,535.1	1,535.1	1,535.7	0.6
AH	43,116[1]	285	820	2.1	1,539.6	1,539.6	1,540.4	0.8
AI	44,484[1]	200	387	0.3	1,544.7	1,544.7	1,545.2	0.5
Wagon Wash								
A	105[2]	27	56	8.2	1,425.5	1,425.5	1,425.5	0.0
B	596[2]	33	60	7.7	1,460.6	1,460.6	1,460.6	0.0

[1]Stream Distance in Feet Above Confluence With Hassayampa River [2]Stream Distance in Feet Above Confluence With Pyrite Wash

TABLE 6

FEDERAL EMERGENCY MANAGEMENT AGENCY

MARICOPA COUNTY, AZ AND INCORPORATED AREAS

FLOODWAY DATA

WAGNER WASH - WAGON WASH

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Wash 1 East								
A	961	38	62	7.3	1,495.3	1,495.3	1,495.3	0.0
B	1,432	28	106	4.2	1,500.6	1,500.6	1,500.7	0.1
C	1,765	37	117	3.8	1,502.2	1,502.2	1,502.3	0.1
D	2,432	77	155	2.9	1,507.6	1,507.6	1,507.8	0.2
E	2,665	31	77	5.8	1,508.7	1,508.7	1,508.9	0.2
F	3,085	36	95	4.8	1,513.8	1,513.8	1,513.8	0.0
G	3,921	46	102	4.4	1,520.1	1,520.1	1,520.1	0.0
H	4,520	40	84	5.3	1,525.6	1,525.6	1,525.6	0.0
I	4,632	70	158	3.0	1,527.4	1,527.4	1,527.4	0.0
J	4,798	148	110	4.3	1,527.8	1,527.8	1,528.0	0.2
K	5,317	215	142	3.3	1,532.4	1,532.4	1,532.5	0.1
L	6,620	36	117	4.0	1,541.9	1,541.9	1,541.9	0.0
M	6,869	52	189	2.5	1,542.5	1,542.5	1,542.5	0.0

[1]Stream Distance in Feet Above Confluence With Wash 1 West

TABLE 6

FEDERAL EMERGENCY MANAGEMENT AGENCY

MARICOPA COUNTY, AZ AND INCORPORATED AREAS

FLOODWAY DATA

WASH 1 EAST

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Wash 1 West								
A	2,943	541	1,715	3.6	1,351.8	1,351.8	1,352.8	1.0
B	4,920	1,269	2,095	2.9	1,362.0	1,362.0	1,362.1	0.1
C	5,583	1,031	822	7.5	1,363.3	1,363.3	1,363.8	0.5
D	5,747	1,237	4,135	1.5	1,368.8	1,368.8	1,369.7	0.9
E	6,555	1,222	2,657	2.3	1,369.0	1,369.0	1,369.9	0.9
F	9,806	177	920	6.5	1,388.9	1,388.9	1,389.9	1.0
G	10,667	233	973	7.7	1,394.1	1,394.1	1,394.7	0.6
H	11,670	237	927	8.1	1,399.6	1,399.6	1,400.1	0.5
I	12,019	288	1,438	5.2	1,402.3	1,402.3	1,403.0	0.7
J	12,353	243	1,367	5.5	1,403.8	1,403.8	1,404.6	0.8
K	12,951	324	1,372	5.5	1,408.5	1,408.5	1,409.3	0.8
L	14,384	374	1,319	5.7	1,415.2	1,415.2	1,415.9	0.7
M	14,838	412	1,812	4.1	1,418.3	1,418.3	1,418.8	0.5
N	15,292	448	1,651	4.5	1,420.3	1,420.3	1,421.3	1.0
O	15,719	530	1,774	4.2	1,423.0	1,423.0	1,424.0	1.0
P	16,989	659	1,831	4.1	1,429.2	1,429.2	1,429.9	0.7
Q	18,527	407	1,456	5.1	1,437.6	1,437.6	1,438.4	0.8
R	25,020	148	672	11.0	1,472.3	1,472.3	1,473.3	1.0
S	25,711	308	937	7.9	1,481.3	1,481.3	1,481.7	0.4
T	26,237	236	1,023	7.2	1,484.5	1,484.5	1,485.3	0.8
U	28,491	150	737	9.7	1,499.5	1,499.5	1,500.4	0.9
V	29,255	471	1,378	5.2	1,507.4	1,507.4	1,508.0	0.6
W	30,551	630	1,690	4.2	1,515.6	1,515.6	1,516.4	0.8
X	31,382	558	1,282	5.6	1,522.5	1,522.5	1,523.2	0.7
Y	32,585	338	1,247	5.8	1,534.3	1,534.3	1,535.2	0.9
Z	33,733	416	900	8.0	1,543.2	1,543.2	1,543.8	0.6
AA	34,297	98	544	13.2	1,551.8	1,551.8	1,551.8	0.0

[1]Stream Distance in Feet Above Confluence With McMicken Dam Spillway

TABLE 6

FEDERAL EMERGENCY MANAGEMENT AGENCY

MARICOPA COUNTY, AZ AND INCORPORATED AREAS

FLOODWAY DATA

WASH 1 WEST

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Wash 2 East (North of Central Arizona Project Canal)								
A	7,065	132	243	6.0	1,607.6	1,607.6	1,608.6	1.0
B	7,804	92	230	6.3	1,616.3	1,616.3	1,616.6	0.3
C	8,232	132	264	5.5	1,620.2	1,620.2	1,620.8	0.6
D	9,198	153	294	4.9	1,630.9	1,630.9	1,631.2	0.3
E	11,194	174	246	5.9	1,652.2	1,652.2	1,652.5	0.3
F	11,595	173	239	3.7	1,655.7	1,655.7	1,656.6	0.9
G	13,205	93	166	5.4	1,673.7	1,673.7	1,674.1	0.4
H	13,717	265	259	3.4	1,678.9	1,678.9	1,679.0	0.1

[1]Stream Distance in Feet Above Confluence With the Central Arizona Project Canal

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Wash 2 East (South of Central Arizona Project Canal)								
A	13,624	174	249	2.5	1,470.2	1,470.2	1,471.1	0.9
B	13,917	96	128	4.8	1,472.5	1,472.5	1,473.2	0.7
C	14,009	142	170	3.6	1,473.8	1,473.8	1,474.5	0.7
D	14,070	156	277	1.7	1,474.0	1,474.0	1,474.8	0.8
E	14,509	28	58	8.2	1,476.2	1,476.2	1,476.2	0.0
F	14,898	32	107	4.4	1,480.5	1,480.5	1,480.5	0.0
G	15,468	49	69	6.8	1,482.5	1,482.5	1,482.5	0.0
H	15,682	49	139	3.4	1,484.6	1,484.6	1,484.6	0.0
I	16,239	52	108	4.4	1,487.7	1,487.7	1,487.7	0.0
J	16,301	36	61	7.7	1,489.0	1,489.0	1,489.0	0.0
K	16,495	34	115	4.1	1,491.4	1,491.4	1,491.4	0.0
L	17,290	30	98	4.8	1,496.7	1,496.7	1,497.0	0.3
M	17,783	68	177	2.7	1,498.9	1,498.9	1,499.2	0.3
N	18,719	52	151	3.1	1,506.7	1,506.7	1,506.7	0.0
O	19,068	70	127	3.7	1,508.3	1,508.3	1,508.3	0.0
P	21,559	29	85	5.6	1,524.7	1,524.7	1,524.8	0.1
Q	22,125	32	101	4.7	1,529.8	1,529.8	1,529.8	0.0
R	22,891	15	59	7.9	1,533.3	1,533.3	1,533.3	0.0
S	23,114	25	79	5.9	1,536.4	1,536.4	1,536.7	0.3

[1]Stream Distance in Feet Above Confluence With Wash 3 East

TABLE 6

FEDERAL EMERGENCY MANAGEMENT AGENCY

MARICOPA COUNTY, AZ AND INCORPORATED AREAS

FLOODWAY DATA

WASH 2 EAST (South of the Cental Arizona Project Canal)

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Wash 2 East Tributary								
A	2,070	147	329	6.5	1,606.2	1,606.2	1,607.2	1.0
B	2,836	161	400	5.4	1,613.0	1,613.0	1,613.5	0.5
C	5,282	97	348	6.2	1,636.4	1,636.4	1,637.3	0.9
D	5,695	51	199	10.8	1,640.8	1,640.8	1,641.3	0.5
E	6,514	61	210	10.3	1,648.0	1,648.0	1,648.4	0.4
F	7,905	75	327	6.6	1,662.1	1,662.1	1,662.4	0.3
G	8,340	110	259	8.3	1,665.6	1,665.6	1,666.3	0.7
H	8,974	140	282	7.6	1,673.2	1,673.2	1,673.2	0.0
I	9,266	140	460	4.7	1,675.0	1,675.0	1,675.8	0.8

[1]Stream Distance in Feet Above Confluence With Wash 2 East

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Wash 2 West (North of the Central Arizona Project Canal)								
A	1,683	334	1,005	4.1	1,554.9	1,554.9	1,555.4	0.5
B	2,246	232	536	7.7	1,557.0	1,557.0	1,557.8	0.8
C	3,553	222	706	5.8	1,565.9	1,565.9	1,566.9	1.0
D	4,287	440	616	6.7	1,572.9	1,572.9	1,573.7	0.8
E	5,076	338	794	5.2	1,575.9	1,575.9	1,576.5	0.6
F	5,861	405	372	11.0	1,581.0	1,581.0	1,581.4	0.4
G	5,951	287	1,186	3.5	1,583.6	1,583.6	1,584.3	0.7
H	6,855	160	213	6.6	1,585.8	1,585.8	1,586.5	0.7
I	7,323	109	325	4.3	1,589.8	1,589.8	1,590.8	1.0
J	9,239	97	210	6.7	1,600.6	1,600.6	1,601.1	0.5
K	9,547	102	279	5.1	1,603.3	1,603.3	1,604.2	0.9
L	10,282	102	253	4.1	1,608.9	1,608.9	1,609.9	1.0
M	10,681	31	115	9.1	1,611.4	1,611.4	1,612.0	0.6
N	10,814	32	125	8.3	1,613.3	1,613.3	1,614.0	0.7
O	11,693	29	125	8.4	1,618.5	1,618.5	1,619.1	0.6
P	12,157	30	129	8.1	1,623.9	1,623.9	1,624.1	0.2
Q	13,084	31	132	7.9	1,632.8	1,632.8	1,632.8	0.0
R	13,543	54	208	5.0	1,635.2	1,635.2	1,636.0	0.8
S	14,358	67	244	4.3	1,641.8	1,641.8	1,642.2	0.4
T	14,759	105	192	5.4	1,642.9	1,642.9	1,643.3	0.4
U	15,235	86	156	6.7	1,645.5	1,645.5	1,646.5	1.0
V	16,084	177	382	2.7	1,652.4	1,652.4	1,653.4	1.0
W	17,002	145	274	3.8	1,657.6	1,657.6	1,658.5	0.9
X	18,763	112	174	6.0	1,670.5	1,670.5	1,671.4	0.9

[1]Stream Distance in Feet Above Confluence With Central Arizona Project Canal

TABLE 6

FEDERAL EMERGENCY MANAGEMENT AGENCY

MARICOPA COUNTY, AZ AND INCORPORATED AREAS

FLOODWAY DATA

WASH 2 WEST (North of the Central Arizona Project Canal)

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Wash 2 West (South of the Central Arizona Project Canal)								
A	3,057	404	908	3.5	1,352.7	1,352.7	1,353.7	1.0
B	4,155	354	902	3.9	1,358.8	1,358.8	1,359.8	1.0
C	5,106	355	659	4.6	1,363.4	1,363.4	1,364.4	1.0
D	6,357	585	1,073	2.5	1,370.9	1,370.9	1,371.9	1.0
E	8,205	104	381	8.9	1,376.9	1,376.9	1,377.4	0.5
F	8,374	73	954	3.3	1,378.6	1,378.6	1,378.7	0.1
G	8,633	76	275	10.8	1,372.5	1,372.5	1,372.5	0.0
H	8,934	73	470	6.3	1,382.7	1,382.7	1,383.1	0.4
I	9,837	206	677	4.3	1,387.2	1,387.2	1,388.2	1.0
J	10,666	235	639	4.7	1,389.9	1,389.9	1,390.6	0.7
K	11,357	122	381	8.8	1,393.8	1,393.8	1,394.1	0.3
L	11,421	140	679	4.4	1,394.9	1,394.9	1,395.3	0.4
M[2]	33,554	323	475	5.8	1,514.9	1,514.9	1,515.7	0.8
N	34,790	358	607	4.7	1,522.2	1,522.2	1,522.8	0.6
O	35,872	601	903	2.5	1,528.9	1,528.9	1,529.7	0.8
P	36,622	487	638	4.5	1,533.4	1,533.4	1,534.3	0.9
Q	38,159	191	560	4.3	1,542.8	1,542.8	1,543.8	1.0
R	38,423	87	281	10.3	1,546.5	1,546.5	1,546.5	0.0

[1]Stream Distance in Feet Above Confluence With the McMicken Dam Spillway

[2]Wash 2 West (South of the Central Arizona Project Canal) is Zone A from Cross Section L to Cross Section M.

TABLE 6

FEDERAL EMERGENCY MANAGEMENT AGENCY

MARICOPA COUNTY, AZ AND INCORPORATED AREAS

FLOODWAY DATA

WASH 2 WEST (South of the Central Arizona Project Canal)

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Wash 2 West Tributary 1								
A	1,492	304	616	6.4	1,585.0	1,585.0	1,585.8	0.8
B	1,905	263	638	6.2	1,588.3	1,588.3	1,588.5	0.2
C	2,871	506	995	5.1	1,593.0	1,593.0	1,593.5	0.5
D	3,850	197	510	7.7	1,599.4	1,599.4	1,599.6	0.2
E	4,757	265	498	7.9	1,604.0	1,604.0	1,605.0	1.0
F	5,149	257	630	6.2	1,607.0	1,607.0	1,607.8	0.8
G	5,451	319	537	7.3	1,610.5	1,610.5	1,610.7	0.2
H	6,244	674	709	5.6	1,615.8	1,615.8	1,616.0	0.2
I	7,361	706	1,192	3.4	1,624.5	1,624.5	1,625.4	0.9
J	9,472	160	638	6.3	1,642.8	1,642.8	1,643.6	0.8
K	10,271	333	754	5.4	1,648.2	1,648.2	1,649.2	1.0
L	10,741	206	374	4.8	1,653.1	1,653.1	1,653.1	0.0
M	11,048	238	312	5.8	1,655.0	1,655.0	1,655.6	0.6
N	11,123	258	683	2.6	1,657.4	1,657.4	1,658.2	0.8
O	11,599	94	222	8.1	1,659.2	1,659.2	1,659.6	0.4
P	12,360	86	221	8.2	1,666.2	1,666.2	1,667.0	0.8
Q	12,779	53	248	7.3	1,671.2	1,671.2	1,672.1	0.9
R	15,685	105	287	6.3	1,696.9	1,696.9	1,697.8	0.9
S	17,612	91	269	6.7	1,717.0	1,717.0	1,717.9	0.9
T	18,024	181	468	3.9	1,719.7	1,719.7	1,720.6	0.9

[1]Stream Distance in Feet Above Confluence With Wash 2 West

TABLE 6

FEDERAL EMERGENCY MANAGEMENT AGENCY

MARICOPA COUNTY, AZ AND INCORPORATED AREAS

FLOODWAY DATA

WASH 2 WEST TRIBUTARY 1

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Wash 2 West Tributary 2								
A	1,186	401	290	4.9	1,552.3	1,552.3	1,552.5	0.2
B	2,678	365	471	3.0	1,564.1	1,564.1	1,565.1	1.0
C	3,834	232	412	3.4	1,569.4	1,569.4	1,570.4	1.0
D	5,493	261	412	3.4	1,582.0	1,582.0	1,582.6	0.6
E	6,722	275	341	3.4	1,588.8	1,588.8	1,589.2	0.4
F	8,302	160	323	3.6	1,599.7	1,599.7	1,600.0	0.3
G	8,774	209	333	3.5	1,601.7	1,601.7	1,602.6	0.9
H	10,210	199	321	3.6	1,611.8	1,611.8	1,612.7	0.9
I	12,024	106	245	4.7	1,625.6	1,625.6	1,626.3	0.7
J	13,098	42	168	6.9	1,636.5	1,636.5	1,637.2	0.7
K	14,886	94	126	4.2	1,651.3	1,651.3	1,651.4	0.1
L	15,924	48	107	5.0	1,661.8	1,661.8	1,662.2	0.4

[1]Stream Distance in Feet Above Confluence With Central Arizona Project Canal

TABLE 6

FEDERAL EMERGENCY MANAGEMENT AGENCY

MARICOPA COUNTY, AZ AND INCORPORATED AREAS

FLOODWAY DATA

WASH 2 WEST TRIBUTARY 2

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Wash 3 East								
A	3,465	600	1,837	1.4	1,353.9	1,353.9	1,354.7	0.8
B	4,567	529	1,527	1.6	1,354.6	1,354.6	1,355.3	0.7
C	5,059	79	295	8.4	1,356.5	1,356.5	1,357.1	0.6
D	5,185	95	470	5.2	1,360.4	1,360.4	1,360.7	0.3
E	5,593	333	1,219	2.0	1,362.6	1,362.6	1,363.3	0.7
F	6,023	863	1,319	1.9	1,363.8	1,363.8	1,364.1	0.3
G	6,113	897	2,380	1.0	1,365.9	1,365.9	1,366.1	0.2
H	6,801	329	733	2.7	1,366.5	1,366.5	1,367.2	0.7
I	7,290	311	605	3.2	1,368.8	1,368.8	1,369.8	1.0
J	9,117	245	652	3.0	1,380.3	1,380.3	1,380.9	0.6
K	10,452	494	623	3.1	1,387.0	1,387.0	1,387.3	0.3
L	11,495	262	597	2.8	1,394.5	1,394.5	1,395.0	0.5
M	11,950	445	729	2.3	1,398.3	1,398.3	1,398.6	0.3
N	14,272	266	446	3.7	1,414.0	1,414.0	1,415.0	1.0
O	15,176	177	299	5.5	1,420.3	1,420.3	1,420.5	0.2
P	15,720	65	251	6.6	1,422.6	1,422.6	1,423.4	0.8
Q	15,820	53	187	8.8	1,424.3	1,424.3	1,424.3	0.0
R	16,166	272	358	4.6	1,426.2	1,426.2	1,426.5	0.3
S	17,879	194	296	5.6	1,438.5	1,438.5	1,439.1	0.6
T	19,804	893	769	2.2	1,450.8	1,450.8	1,451.7	0.9
U	20,077	905	552	3.0	1,453.6	1,453.6	1,454.1	0.5
V	21,304	437	225	3.5	1,461.7	1,461.7	1,462.2	0.5
W	21,688	195	292	2.7	1,465.4	1,465.4	1,466.3	0.9
X	22,038	238	238	3.3	1,467.7	1,467.7	1,468.7	1.0
Y	24,125	148	241	3.2	1,484.9	1,484.9	1,485.2	0.3
Z	26,544	264	318	2.5	1,504.1	1,504.1	1,505.0	0.9

[1]Stream distance in Feet Above Confluence With McMicken Dam Spillway

TABLE 6

FEDERAL EMERGENCY MANAGEMENT AGENCY

MARICOPA COUNTY, AZ AND INCORPORATED AREAS

FLOODWAY DATA

WASH 3 EAST

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Wash 3 East								
AA	28,208	40	114	3.9	1,518.2	1,518.2	1,519.0	0.8
AB	29,358	27	97	4.5	1,526.8	1,526.8	1,527.6	0.8
AC	30,079	47	110	4.0	1,531.3	1,531.3	1,531.7	0.4
AD	30,653	38	108	4.1	1,536.1	1,536.1	1,536.6	0.5
AE	31,068	31	57	7.7	1,537.8	1,537.8	1,538.0	0.2
AF	31,187	9	40	11.1	1,542.1	1,542.1	1,542.3	0.2

[1]Stream distance in Feet Above Confluence With McMicken Dam Spillway

TABLE 6

FEDERAL EMERGENCY MANAGEMENT AGENCY

MARICOPA COUNTY, AZ AND INCORPORATED AREAS

FLOODWAY DATA

WASH 3 EAST

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Wash 3 West								
A	1,098	425	3,869	1.1	1,546.0	1,546.0	1,546.3	0.3
B	2,129	147	970	4.4	1,546.1	1,546.1	1,546.6	0.5
C	2,871	154	762	5.6	1,546.6	1,546.6	1,547.6	1.0
D	5,538	155	803	5.3	1,558.4	1,558.4	1,559.3	0.9
E	6,316	109	382	9.8	1,561.6	1,561.6	1,561.6	0.0
F	7,068	71	370	10.1	1,565.1	1,565.1	1,565.3	0.2
G	7,796	59	315	6.3	1,569.3	1,569.3	1,570.1	0.8
H	8,139	41	214	9.2	1,570.2	1,570.2	1,571.2	1.0
I	8,563	41	196	10.0	1,574.0	1,574.0	1,574.0	0.0
J	11,810	114	229	6.7	1,597.4	1,597.4	1,597.7	0.3
K	15,514	208	370	4.1	1,620.8	1,620.8	1,621.4	0.6
L	18,936	252	497	3.0	1,640.1	1,640.1	1,640.4	0.3
M	22,733	164	405	3.6	1,663.5	1,663.5	1,664.3	0.8
N	24,816	158	306	4.7	1,676.4	1,676.4	1,676.8	0.4
O	29,459	135	292	3.4	1,702.3	1,702.3	1,702.7	0.4
P	33,313	156	207	3.2	1,726.0	1,726.0	1,726.5	0.5
Q	36,458	54	105	3.6	1,744.7	1,744.7	1,744.9	0.2

[1]Stream Distance in Feet Above Confluence With Central Arizona Project Canal

TABLE 6

FEDERAL EMERGENCY MANAGEMENT AGENCY

MARICOPA COUNTY, AZ AND INCORPORATED AREAS

FLOODWAY DATA

WASH 3 WEST

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Wash 4 East								
A	1,871	113	215	3.1	1,456.5	1,456.5	1,457.4	0.9
B	4,381	165	260	2.6	1,474.6	1,474.6	1,475.5	0.9
C	5,420	43	144	4.6	1,481.5	1,481.5	1,482.5	1.0
D	5,875	58	181	3.7	1,485.3	1,485.3	1,485.4	0.1
E	6,480	91	177	3.8	1,489.3	1,489.3	1,489.3	0.0
F	7,550	40	160	4.2	1,499.4	1,499.4	1,500.1	0.7
G	9,030	38	120	5.6	1,510.5	1,510.5	1,510.7	0.2
H	9,489	111	244	2.2	1,514.9	1,514.9	1,514.9	0.0
I	9,624	43	143	3.7	1,515.2	1,515.2	1,515.2	0.0
J	10,052	22	74	7.1	1,518.4	1,518.4	1,518.5	0.1
K	10,211	55	80	6.6	1,523.1	1,523.1	1,523.4	0.3
L	10,523	24	101	5.2	1,523.5	1,523.5	1,524.4	0.9
M	10,980	80	142	3.7	1,526.3	1,526.3	1,526.4	0.1
N	12,557	29	93	5.7	1,539.3	1,539.3	1,539.3	0.0
O	12,772	10	44	11.9	1,545.2	1,545.2	1,545.2	0.0

[1]Stream Distance in Feet Above Confluence With Wash 3 East

TABLE 6

FEDERAL EMERGENCY MANAGEMENT AGENCY

MARICOPA COUNTY, AZ AND INCORPORATED AREAS

FLOODWAY DATA

WASH 4 EAST

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Wash 5 East								
A	6,853	151	170	4.0	1,390.3	1,390.3	1,390.4	0.1
B	7,463	158	160	5.6	1,392.4	1,392.4	1,392.8	0.4
C	7,913	215	282	2.9	1,396.8	1,396.8	1,397.5	0.7
D	9,626	106	223	4.3	1,409.1	1,409.1	1,410.0	0.9
E	10,018	56	122	7.2	1,411.7	1,411.7	1,412.2	0.5
F	11,245	77	182	4.6	1,422.0	1,422.0	1,422.7	0.7
G	11,649	117	216	3.8	1,424.2	1,424.2	1,425.1	0.9
H	13,489	93	131	4.8	1,439.7	1,439.7	1,440.6	0.9
I	14,596	169	230	2.4	1,450.2	1,450.2	1,451.0	0.8
J	15,117	169	187	3.8	1,453.3	1,453.3	1,454.3	1.0
K	17,148	88	181	4.7	1,470.5	1,470.5	1,470.9	0.4
L	17,641	151	197	4.4	1,474.1	1,474.1	1,475.0	0.9
M	19,643	57	162	5.0	1,491.1	1,491.1	1,491.7	0.6
N	20,337	71	255	2.5	1,496.0	1,496.0	1,496.4	0.4
O	21,386	141	332	1.3	1,496.6	1,496.6	1,497.6	1.0
P	22,091	209	165	3.3	1,499.0	1,499.0	1,499.5	0.5
Q	23,456	85	146	4.0	1,508.3	1,508.3	1,509.1	0.8
R	24,176	58	108	5.2	1,514.5	1,514.5	1,514.9	0.4
S	24,788	30	97	6.0	1,518.5	1,518.5	1,519.3	0.8
T	25,122	91	137	4.6	1,522.3	1,522.3	1,523.1	0.8
U	25,763	64	146	3.6	1,527.3	1,527.3	1,528.2	0.9
V	26,143	133	127	5.5	1,530.2	1,530.2	1,530.9	0.7
W	27,024	65	121	4.8	1,540.7	1,540.7	1,541.2	0.5
X	27,160	11	42	9.9	1,543.2	1,543.2	1,543.2	0.0

[1]Stream Distance in Feet Above Confluence With Beardsley Canal

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Wash 6 East								
A	794	56	113	6.2	1,418.1	1,418.1	1,418.9	0.8
B	981	145	211	3.3	1,420.0	1,420.0	1,421.0	1.0
C	1,407	58	97	7.2	1,422.3	1,422.3	1,423.2	0.9
D	1,689	108	216	3.2	1,425.1	1,425.1	1,426.1	1.0
E	2,037	79	114	6.1	1,427.4	1,427.4	1,428.1	0.7
F	3,442	123	201	3.5	1,439.0	1,439.0	1,439.9	0.9
G	4,399	108	150	4.7	1,445.4	1,445.4	1,446.4	1.0
H	5,812	135	228	3.1	1,457.7	1,457.7	1,458.7	1.0
I	7,251	103	166	4.2	1,470.3	1,470.3	1,471.2	0.9
J	9,253	248	262	2.7	1,487.1	1,487.1	1,488.0	0.9
K	10,653	57	158	4.4	1,498.2	1,498.2	1,499.0	0.8
L	12,740	40	98	4.5	1,515.7	1,515.7	1,516.1	0.4
M	13,827	34	89	5.0	1,524.1	1,524.1	1,524.5	0.4
N	14,763	52	109	4.1	1,532.6	1,532.6	1,532.9	0.3
O	15,311	48	106	4.1	1,538.2	1,538.2	1,538.3	0.1
P	16,018	28	80	5.5	1,543.6	1,543.6	1,543.7	0.1

[1]Stream Distance in Feet Above Confluence With Wash 6 East South

TABLE 6

FEDERAL EMERGENCY MANAGEMENT AGENCY

MARICOPA COUNTY, AZ AND INCORPORATED AREAS

FLOODWAY DATA

WASH 6 EAST

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Wash 6 East South								
A	352	156	399	3.0	1,374.3	1,374.3	1,374.4	0.1
B	749	31	70	6.0	1,376.0	1,376.0	1,376.0	0.0
C	938	61	97	4.3	1,378.1	1,378.1	1,378.2	0.1
D	1,632	32	86	4.9	1,382.0	1,382.0	1,383.0	1.0
E	2,178	36	104	4.1	1,386.7	1,386.7	1,386.8	0.1
F	2,633	42	93	4.5	1,389.1	1,389.1	1,389.3	0.2
G	4,026	54	97	4.4	1,399.6	1,399.6	1,400.2	0.6
H	4,164	67	71	5.9	1,401.3	1,401.3	1,401.3	0.0
I	4,809	31	74	5.7	1,405.5	1,405.5	1,405.5	0.0
J	5,497	30	74	5.7	1,410.4	1,410.4	1,410.6	0.2
K	5,725	58	200	6.8	1,412.8	1,412.8	1,413.1	0.3
L	6,380	240	349	3.9	1,416.5	1,416.5	1,417.5	1.0

[1]Stream Distance in Feet Above Confluence With Unnamed Stream

TABLE 6

FEDERAL EMERGENCY MANAGEMENT AGENCY

MARICOPA COUNTY, AZ AND INCORPORATED AREAS

FLOODWAY DATA

WASH 6 EAST SOUTH

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Wash 7 East								
A	1,054	365	574	6.8	1,556.3	1,556.3	1,557.0	0.7
B	2,960	418	604	6.5	1,573.4	1,573.4	1,573.7	0.3
C	4,284	220	717	5.5	1,586.0	1,586.0	1,586.8	0.8

[1]Stream Distance in Feet Above Confluence With Central Arizona Project Canal

TABLE 6

FEDERAL EMERGENCY MANAGEMENT AGENCY

MARICOPA COUNTY, AZ AND INCORPORATED AREAS

FLOODWAY DATA

WASH 7 EAST

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Wash 7 East East Split								
A	1,096	39	85	4.8	1,482.8	1,482.8	1,483.2	0.4
B	2,812	18	52	7.9	1,496.1	1,496.1	1,496.3	0.2
C	3,668	74	124	3.3	1,505.2	1,505.2	1,505.4	0.2
D	4,000	45	72	5.7	1,508.1	1,508.1	1,508.2	0.1
E	4,285	38	71	5.8	1,512.2	1,512.2	1,512.2	0.0
F	5,267	44	84	4.9	1,520.1	1,520.1	1,520.7	0.6
G	6,366	88	111	3.7	1,529.8	1,529.8	1,529.9	0.1

[1]Stream Distance in Feet Above Confluence With Wash 8 East

TABLE 6

FEDERAL EMERGENCY MANAGEMENT AGENCY

MARICOPA COUNTY, AZ AND INCORPORATED AREAS

FLOODWAY DATA

WASH 7 EAST EAST SPLIT

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Wash 7 East Tributary								
A	1,534	34	78	6.6	1,559.8	1,559.8	1,560.0	0.2
B	2,205	43	105	4.9	1,566.8	1,566.8	1,567.5	0.7
C	3,809	40	84	6.1	1,581.7	1,581.7	1,582.1	0.4
D	4,959	36	94	5.5	1,591.5	1,591.5	1,591.5	0.0
E	5,835	56	104	4.9	1,600.7	1,600.7	1,601.1	0.4
F	6,711	44	102	5.0	1,609.4	1,609.4	1,609.5	0.1
G	8,021	26	29	4.9	1,620.5	1,620.5	1,620.5	0.0
H	8,913	45	41	3.4	1,629.3	1,629.3	1,629.4	0.1
I	9,158	29	37	3.8	1,634.1	1,634.1	1,634.1	0.0
J	9,539	27	33	4.3	1,638.0	1,638.0	1,638.0	0.0

[1]Stream Distance in Feet Above Confluence With Central Arizona Project Canal

TABLE 6

FEDERAL EMERGENCY MANAGEMENT AGENCY

MARICOPA COUNTY, AZ AND INCORPORATED AREAS

FLOODWAY DATA

WASH 7 EAST TRIBUTARY

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Wash 7 East West Split								
A	1,080	56	57	4.9	1,508.3	1,508.3	1,508.7	0.4
B	2,355	45	54	5.2	1,520.4	1,520.4	1,521.1	0.7
C	3,065	51	71	3.9	1,526.4	1,526.4	1,526.9	0.5
D	4,745	49	104	3.9	1,538.5	1,538.5	1,538.5	0.0
E	5,012	12	40	10.3	1,542.8	1,542.8	1,542.8	0.0

[1]Stream Distance in Feet Above Confluence With Wash 6 East

TABLE 6

FEDERAL EMERGENCY MANAGEMENT AGENCY

MARICOPA COUNTY, AZ AND INCORPORATED AREAS

FLOODWAY DATA

WASH 7 EAST WEST SPLIT

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Wash 8 East								
A	1,494	121	283	3.8	1,419.4	1,419.4	1,419.9	0.5
B	2,249	95	178	6.1	1,425.0	1,425.0	1,425.0	0.0
C	2,405	82	288	3.8	1,426.2	1,426.2	1,427.0	0.8
D	2,749	63	194	5.6	1,428.0	1,428.0	1,428.4	0.4
E	3,291	112	252	4.3	1,432.7	1,432.7	1,432.9	0.2
F	3,703	68	229	4.7	1,435.4	1,435.4	1,435.5	0.1
G	4,830	87	234	4.6	1,444.6	1,444.6	1,445.1	0.5
H	5,963	29	95	7.5	1,452.5	1,452.5	1,453.2	0.7
I	6,132	42	126	5.7	1,455.3	1,455.3	1,455.4	0.1
J	7,031	80	112	6.4	1,460.7	1,460.7	1,461.5	0.8
K	7,814	64	163	4.4	1,467.4	1,467.4	1,467.9	0.5
L	8,227	67	121	5.8	1,471.4	1,471.4	1,471.8	0.4
M	9,285	51	112	4.4	1,479.8	1,479.8	1,480.6	0.8
N	9,872	49	130	3.8	1,483.8	1,483.8	1,484.6	0.8
O	10,392	59	110	4.4	1,489.4	1,489.4	1,489.9	0.5
P	11,088	42	103	4.8	1,496.4	1,496.4	1,496.8	0.4
Q	11,488	48	105	4.7	1,499.5	1,499.5	1,500.4	0.9
R	12,207	52	125	3.9	1,506.5	1,506.5	1,506.6	0.1
S	12,680	39	92	5.3	1,510.0	1,510.0	1,510.4	0.4
T	13,354	61	101	4.8	1,515.9	1,515.9	1,516.3	0.4
U	14,154	66	132	3.7	1,524.1	1,524.1	1,524.2	0.1
V	14,313	72	152	3.2	1,524.9	1,524.9	1,525.1	0.2
W	15,300	39	111	4.4	1,534.5	1,534.5	1,534.5	0.0
X	15,588	50	110	4.5	1,536.4	1,536.4	1,536.5	0.1
Y	15,988	13	45	10.8	1,542.0	1,542.0	1,542.0	0.0

[1]Stream Distance in Feet Above Confluence With Wash 6 East - South

TABLE 6

FEDERAL EMERGENCY MANAGEMENT AGENCY

MARICOPA COUNTY, AZ AND INCORPORATED AREAS

FLOODWAY DATA

WASH 8 EAST

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Wash 9								
A	1,157	62	176	6.5	1,508.8	1,508.8	1,509.8	1.0
B	2,118	79	151	6.7	1,521.8	1,521.8	1,522.6	0.8
C	3,084	107	193	5.2	1,536.8	1,536.8	1,537.8	1.0
D	4,283	44	137	7.3	1,556.1	1,556.1	1,556.1	0.0
E	5,370	121	150	6.4	1,573.7	1,573.7	1,573.7	0.0
F	6,759	174	168	5.7	1,600.4	1,600.4	1,600.4	0.0
G	7,715	94	118	6.4	1,614.4	1,614.4	1,614.4	0.0
H	8,734	22	73	10.5	1,634.7	1,634.7	1,635.3	0.6
I	9,494	34	105	6.3	1,648.3	1,648.3	1,648.3	0.0

[1]Stream Distance in Feet Above Confluence With Verde River

TABLE 6

FEDERAL EMERGENCY MANAGEMENT AGENCY

MARICOPA COUNTY, AZ AND INCORPORATED AREAS

FLOODWAY DATA

WASH 9

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Wash 9 East								
A	373	137	131	4.4	1,375.9	1,375.9	1,376.1	0.2
B	871	169	212	2.8	1,380.6	1,380.6	1,381.1	0.5
C	1,400	178	189	3.1	1,383.4	1,383.4	1,384.4	1.0
D	2,219	86	155	3.8	1,390.0	1,390.0	1,390.6	0.6
E	2,607	106	187	3.2	1,391.9	1,391.9	1,392.8	0.9
F	3,571	39	127	4.7	1,399.9	1,399.9	1,400.3	0.4
G	3,864	33	119	5.0	1,401.6	1,401.6	1,402.1	0.5
H	4,285	49	127	4.6	1,405.4	1,405.4	1,406.0	0.6
I	4,538	57	182	3.2	1,406.6	1,406.6	1,407.5	0.9
J	5,186	83	168	3.5	1,411.5	1,411.5	1,412.1	0.6
K	6,456	127	156	3.8	1,419.8	1,419.8	1,420.7	0.9
L	6,739	137	174	3.4	1,422.8	1,422.8	1,423.5	0.7
M	8,435	39	85	4.0	1,435.5	1,435.5	1,436.3	0.8
N	9,019	52	72	4.7	1,440.6	1,440.6	1,441.0	0.4
O	9,296	91	111	3.1	1,443.6	1,443.6	1,444.3	0.7
P	10,099	104	135	3.7	1,450.6	1,450.6	1,451.0	0.4
Q	12,081	97	122	3.6	1,467.5	1,467.5	1,468.5	1.0
R	12,754	74	99	4.4	1,474.6	1,474.6	1,475.5	0.9
S	13,124	140	148	3.0	1,479.2	1,479.2	1,479.7	0.5
T	14,270	151	149	3.0	1,490.1	1,490.1	1,490.4	0.3
U	15,947	32	75	5.2	1,504.7	1,504.7	1,504.7	0.0
V	16,763	70	101	3.9	1,513.1	1,513.1	1,513.1	0.0
W	17,047	52	72	5.4	1,516.8	1,516.8	1,516.8	0.0
X	17,745	51	64	6.1	1,523.8	1,523.8	1,523.7	0.0
Y	18,000	107	135	2.9	1,527.2	1,527.2	1,527.4	0.2
Z	18,296	63	94	4.2	1,530.2	1,530.2	1,530.2	0.0

[1]Stream Distance in Feet Above Confluence With Unnamed Stream

TABLE 6

FEDERAL EMERGENCY MANAGEMENT AGENCY

MARICOPA COUNTY, AZ AND INCORPORATED AREAS

FLOODWAY DATA

WASH 9 EAST

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Wash 9 East								
AA	18,732	31	65	6.1	1,533.3	1,533.3	1,533.2	0.0
AB	18,797	30	82	4.8	1,534.4	1,534.4	1,534.4	0.0
AC	19,113	33	75	5.2	1,536.8	1,536.8	1,536.8	0.0
AD	19,484	41	86	4.5	1,540.5	1,540.5	1,540.5	0.0

[1]Feet Above Confluence With Unnamed Stream

TABLE 6

FEDERAL EMERGENCY MANAGEMENT AGENCY

MARICOPA COUNTY, AZ AND INCORPORATED AREAS

FLOODWAY DATA

WASH 9 EAST

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Wash 9 East Split								
A	0	52	122	4.1	1,427.7	1,427.7	1,428.0	0.3
B	285	55	36	4.5	1,430.1	1,430.1	1,430.5	0.4
C	656	80	81	2.0	1,433.6	1,433.6	1,434.2	0.6
D	1,414	68	75	2.1	1,440.4	1,440.4	1,441.2	0.8
E	2,229	201	203	2.5	1,447.3	1,447.3	1,447.4	0.1

[1]Stream Distance in Feet Above Confluence With Wash 9 East

TABLE 6

FEDERAL EMERGENCY MANAGEMENT AGENCY

MARICOPA COUNTY, AZ AND INCORPORATED AREAS

FLOODWAY DATA

WASH 9 EAST SPLIT

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Wash 10 East								
A	2,856	138	237	1.9	1,357.3	1,357.3	1,358.1	0.8
B	3,149	97	131	3.4	1,358.5	1,358.5	1,358.9	0.4
C	4,191	55	110	4.0	1,366.0	1,366.0	1,366.8	0.8
D	4,634	90	143	3.1	1,368.3	1,368.3	1,369.3	1.0
E	5,615	82	106	4.2	1,376.5	1,376.5	1,377.2	0.7
F	6,578	69	118	3.7	1,383.0	1,383.0	1,384.0	1.0
G	7,458	68	129	3.4	1,388.2	1,388.2	1,388.7	0.5
H	8,605	85	92	3.2	1,397.6	1,397.6	1,398.3	0.7
I	9,153	57	70	4.2	1,404.1	1,404.1	1,405.0	0.9
J	9,647	69	119	2.4	1,407.8	1,407.8	1,408.3	0.5
K	10,180	50	90	3.2	1,410.4	1,410.4	1,410.4	0.0
L	10,747	31	43	6.7	1,414.8	1,414.8	1,414.8	0.0
M	10,832	42	48	6.0	1,418.0	1,418.0	1,418.1	0.1
N	11,134	95	146	2.0	1,420.5	1,420.5	1,420.7	0.2
O	11,444	56	89	3.2	1,421.8	1,421.8	1,421.8	0.0
P	12,376	34	53	5.5	1,429.6	1,429.6	1,429.6	0.0
Q	13,611	41	69	3.3	1,441.8	1,441.8	1,441.8	0.0
R	14,015	20	47	4.9	1,444.8	1,444.8	1,444.8	0.0
S	14,351	76	50	4.6	1,451.7	1,451.7	1,451.8	0.1
T	15,288	71	110	3.4	1,460.4	1,460.4	1,460.4	0.0
U	16,307	39	93	3.2	1,467.6	1,467.6	1,467.8	0.2
V	16,635	37	84	3.6	1,469.3	1,469.3	1,469.3	0.0
W	17,392	35	59	5.1	1,475.3	1,475.3	1,475.3	0.0
X	17,683	43	63	4.8	1,480.1	1,480.1	1,480.2	0.1
Y	18,338	31	71	4.2	1,485.5	1,485.5	1,485.6	0.1
Z	18,677	36	78	3.8	1,487.4	1,487.4	1,487.4	0.0

[1]Stream Distance in Feet Above Confluence With Beardsley Canal

TABLE 6

FEDERAL EMERGENCY MANAGEMENT AGENCY

MARICOPA COUNTY, AZ AND INCORPORATED AREAS

FLOODWAY DATA

WASH 10 EAST

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Wash 10 East								
AA	19,660	47	88	2.8	1,498.1	1,498.1	1,498.4	0.3
AB	19,971	31	76	3.3	1,499.3	1,499.3	1,499.7	0.4
AC	20,337	37	46	3.0	1,504.8	1,504.8	1,505.3	0.5
AD	20,615	38	46	3.1	1,507.3	1,507.3	1,507.9	0.6
AE	22,031	26	34	4.1	1,523.6	1,523.6	1,523.6	0.0
AF	23,588	32	63	3.5	1,539.8	1,539.8	1,539.8	0.0

[1]Stream Distance in Feet Above Confluence With Beardsley Canal

TABLE 5

FEDERAL EMERGENCY MANAGEMENT AGENCY

MARICOPA COUNTY, AZ AND INCORPORATED AREAS

FLOODWAY DATA

WASH 10 EAST

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Wash 10 East Split 1								
A	1,241	29	30	3.3	1,493.5	1,493.5	1,493.6	0.1
B	1,623	17	26	3.9	1,496.4	1,496.4	1,496.5	0.1
C	2,194	20	27	3.7	1,502.8	1,502.8	1,502.9	0.1
D	2,444	20	27	3.8	1,504.9	1,504.9	1,504.9	0.0
E	2,769	22	20	5.0	1,508.7	1,508.7	1,508.8	0.1
F	3,068	35	39	2.5	1,511.7	1,511.7	1,511.7	0.0
G	3,891	44	37	2.7	1,521.7	1,521.7	1,522.4	0.7
H	4,099	33	29	3.4	1,523.2	1,523.2	1,524.1	0.9
I	4,557	47	58	3.8	1,527.7	1,527.7	1,528.2	0.5

[1]Stream Distance in Feet Above Confluence With Wash 10 East

TABLE 9

FEDERAL EMERGENCY MANAGEMENT AGENCY

MARICOPA COUNTY, AZ AND INCORPORATED AREAS

FLOODWAY DATA

WASH 10 EAST SPLIT 1

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Wash 10 East Split 2								
A	2,805	67	44	4.6	1,358.7	1,358.7	1,358.7	0.0
B	3,432	60	58	3.5	1,363.1	1,363.1	1,363.4	0.3
C	3,890	57	51	3.9	1,367.2	1,367.2	1,367.6	0.4
D	4,927	77	72	2.8	1,373.5	1,373.5	1,373.6	0.1
E	5,775	120	83	2.4	1,380.0	1,380.0	1,380.1	0.1
F	6,528	71	69	2.9	1,387.9	1,387.9	1,388.2	0.3
G	7,783	29	45	4.4	1,397.6	1,397.6	1,397.9	0.3
H	8,506	80	72	2.8	1,405.9	1,405.9	1,406.2	0.3
I	8,899	62	56	3.6	1,408.9	1,408.9	1,409.0	0.1
J	9,777	63	63	3.2	1,418.1	1,418.1	1,418.6	0.5
K	11,487	37	53	3.8	1,432.9	1,432.9	1,433.0	0.1
L	11,951	37	49	4.1	1,435.8	1,435.8	1,435.8	0.0
M	12,863	31	42	4.8	1,443.8	1,443.8	1,443.9	0.1
N	13,631	25	35	5.8	1,450.7	1,450.7	1,450.6	0.1
O	13,905	79	74	5.0	1,455.1	1,455.1	1,455.2	0.1

[1]Stream Distance in Feet Above Confluence With Wash 10 East

TABLE 6

FEDERAL EMERGENCY MANAGEMENT AGENCY

MARICOPA COUNTY, AZ AND INCORPORATED AREAS

FLOODWAY DATA

WASH 10 EAST SPLIT 2

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Wash 11 East								
A	738	628	1,135	2.6	1,348.1	1,348.1	1,348.4	0.3
B	996	453	645	4.7	1,349.1	1,349.1	1,349.8	0.7
C	1,146	469	854	3.5	1,350.4	1,350.4	1,351.2	0.8
D	2,475	481	850	3.5	1,358.1	1,358.1	1,359.0	0.9
E	4,038	262	616	4.8	1,368.7	1,368.7	1,369.6	0.9
F	5,272	99	298	4.4	1,377.9	1,377.9	1,378.7	0.8
G	5,803	89	258	5.1	1,381.3	1,381.3	1,382.0	0.7
H	6,001	84	221	5.9	1,383.1	1,383.1	1,383.7	0.6
I	7,127	61	239	5.5	1,391.9	1,391.9	1,392.2	0.3
J	8,166	80	278	4.7	1,399.0	1,399.0	1,399.4	0.4
K	8,336	68	236	5.5	1,399.0	1,399.0	1,399.6	0.6
L	8,442	72	157	8.4	1,401.5	1,401.5	1,401.5	0.0
M	8,630	209	268	4.9	1,404.0	1,404.0	1,404.4	0.4
N	8,944	200	394	3.3	1,406.3	1,406.3	1,407.2	0.9
O	9,699	121	303	4.3	1,410.2	1,410.2	1,411.1	0.9
P	11,431	142	232	5.5	1,421.6	1,421.6	1,422.0	0.4
Q	12,075	78	178	7.2	1,425.3	1,425.3	1,425.8	0.5
R	12,419	70	263	4.8	1,429.1	1,429.1	1,429.8	0.7
S	12,884	65	251	5.1	1,432.5	1,432.5	1,433.1	0.6
T	13,081	67	249	5.1	1,433.5	1,433.5	1,434.4	0.9
U	14,136	143	173	6.0	1,441.9	1,441.9	1,442.2	0.3
V	15,359	132	204	5.1	1,450.0	1,450.0	1,450.2	0.2
W	16,139	149	210	4.9	1,457.6	1,457.6	1,458.0	0.4
X	17,322	121	190	5.4	1,468.8	1,468.8	1,468.9	0.1
Y	17,826	75	141	4.0	1,472.8	1,472.8	1,473.2	0.4
Z	18,127	78	144	3.9	1,474.9	1,474.9	1,475.7	0.8

[1]Stream Distance in Feet Above Confluence With Beardsley Canal

TABLE 6

FEDERAL EMERGENCY MANAGEMENT AGENCY

MARICOPA COUNTY, AZ AND INCORPORATED AREAS

FLOODWAY DATA

WASH 11 EAST

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Wash 11 East								
AA	19,711	55	129	4.3	1,489.9	1,489.9	1,490.4	0.5
AB	19,978	100	176	3.2	1,492.1	1,492.1	1,492.4	0.3
AC	20,265	58	86	6.5	1,495.9	1,495.9	1,496.1	0.2
AD	21,097	48	121	4.6	1,503.9	1,503.9	1,504.5	0.6
AE	21,370	55	115	4.9	1,506.0	1,506.0	1,506.7	0.7
AF	21,743	59	137	4.1	1,509.8	1,509.8	1,510.2	0.4
AG	22,844	94	149	3.8	1,519.9	1,519.9	1,520.9	1.0
AH	23,893	56	157	6.2	1,532.0	1,532.0	1,532.5	0.5
AI	24,380	23	143	6.4	1,535.0	1,535.0	1,535.7	0.7

[1]Stream Distance in Feet Above Confluence With Beardsley Canal

TABLE 6

FEDERAL EMERGENCY MANAGEMENT AGENCY

MARICOPA COUNTY, AZ AND INCORPORATED AREAS

FLOODWAY DATA

WASH 11 EAST

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Wash 12 East								
A	13,925	54	60	6.0	1,439.6	1,439.6	1,439.8	0.2
B	14,323	39	100	3.6	1,444.3	1,444.3	1,445.2	0.9
C	14,630	98	138	2.6	1,446.4	1,446.4	1,447.0	0.6
D	14,861	79	85	4.2	1,448.6	1,448.6	1,448.7	0.1
E	15,295	41	54	6.7	1,451.9	1,451.9	1,451.9	0.0
F	15,703	52	119	3.0	1,456.1	1,456.1	1,456.1	0.0
G	15,798	32	52	7.0	1,456.8	1,456.8	1,456.8	0.0
H	16,090	53	115	3.1	1,460.1	1,460.1	1,460.2	0.1
I	16,984	55	113	3.2	1,467.8	1,467.8	1,467.8	0.0
J	17,226	41	108	3.3	1,469.1	1,469.1	1,469.1	0.0
K	17,446	40	97	3.7	1,471.2	1,471.2	1,471.2	0.0
L	18,275	69	99	3.7	1,478.5	1,478.5	1,478.5	0.0
M	20,096	35	72	4.0	1,496.3	1,496.3	1,496.3	0.0
N	20,869	76	60	4.9	1,504.1	1,504.1	1,504.5	0.4
O	21,238	51	92	3.2	1,508.5	1,508.5	1,509.2	0.7
P	21,593	50	74	3.9	1,511.8	1,511.8	1,511.9	0.1
Q	22,003	34	79	4.6	1,516.4	1,516.4	1,516.8	0.4
R	22,387	38	107	3.4	1,519.3	1,519.3	1,519.8	0.5
S	22,877	30	90	4.0	1,524.4	1,524.4	1,524.9	0.5
T	23,732	28	76	4.8	1,531.6	1,531.6	1,531.6	0.0
U	24,054	9	60	6.0	1,535.5	1,535.5	1,535.5	0.0

[1]Stream Distance in Feet Above Confluence With Beardsley Canal

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Wash 13 East								
A	4,477	338	468	3.9	1,371.5	1,371.5	1,371.9	0.4
B	5,249	261	422	4.3	1,377.6	1,377.6	1,378.2	0.6
C	7,161	224	353	5.2	1,390.8	1,390.8	1,391.5	0.7
D	8,040	112	356	5.1	1,397.4	1,397.4	1,397.8	0.4
E	8,632	48	237	7.7	1,400.9	1,400.9	1,401.6	0.7
F	9,142	79	238	1.9	1,404.2	1,404.2	1,405.1	0.9
G	9,444	41	145	3.2	1,404.5	1,404.5	1,405.4	0.9
H	10,201	74	78	5.9	1,409.4	1,409.4	1,409.7	0.3
I	10,553	74	141	3.3	1,413.7	1,413.7	1,414.1	0.4
J	10,581	18	49	9.4	1,415.1	1,415.1	1,415.1	0.0
K	10,695	100	258	1.8	1,416.9	1,416.9	1,416.9	0.0
L	10,782	65	158	2.9	1,416.9	1,416.9	1,417.0	0.1
M	11,279	49	135	3.4	1,419.4	1,419.4	1,419.5	0.1
N	11,819	41	145	3.2	1,423.0	1,423.0	1,423.7	0.7

[1]Stream Distance in Feet Above Confluence With Beardsley Canal

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Wash 14 East								
A	10,001	61	226	6.1	1,410.1	1,410.1	1,410.4	0.3
B	11,148	40	176	7.8	1,417.4	1,417.4	1,417.7	0.3

[1]Stream Distance in Feet Above the Beardsley Canal

TABLE 6

FEDERAL EMERGENCY MANAGEMENT AGENCY

MARICOPA COUNTY, AZ AND INCORPORATED AREAS

FLOODWAY DATA

WASH 14 EAST

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Wash AG								
A	1,312	222	78	3.5	2,031.8	2,031.8	2,031.8	0.0
B	2,462	51	60	4.5	2,060.2	2,060.2	2,060.2	0.0
C	3,338	40	48	5.7	2,077.7	2,077.7	2,077.7	0.0
D	4,352	24	40	6.8	2,099.9	2,099.9	2,099.9	0.0
E	5,297	35	45	6.0	2,121.8	2,121.8	2,121.8	0.0

[1]Stream Distance in Feet Above Confluence With Hassayampa River

TABLE 6

FEDERAL EMERGENCY MANAGEMENT AGENCY

MARICOPA COUNTY, AZ AND INCORPORATED AREAS

FLOODWAY DATA

WASH AG

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Wash B								
A	8	172	252	3.9	1,404.5	1,404.5	1,404.5	0.0
B	1,381	87	171	7.0	1,417.2	1,417.2	1,417.2	0.0
C	2,450	82	166	7.2	1,429.0	1,429.0	1,429.0	0.0
D	3,306	58	136	9.5	1,441.2	1,441.2	1,441.2	0.0
E	4,196	78	182	6.6	1,451.1	1,451.1	1,451.1	0.0
F	5,128	104	1,134	8.0	1,462.5	1,462.5	1,462.5	0.0
G	5,999	215	299	4.7	1,477.0	1,477.0	1,477.0	0.0
H	6,992	195	735	5.8	1,488.8	1,488.8	1,488.8	0.0
I	8,264	69	110	7.9	1,503.2	1,503.2	1,503.2	0.0
J	9,678	169	329	8.9	1,521.5	1,521.5	1,521.5	0.0
K	10,179	213	432	7.6	1,529.8	1,529.8	1,529.8	0.0
L	11,180	165	407	7.0	1,541.8	1,541.8	1,541.8	0.0
M	12,190	95	289	7.0	1,553.3	1,553.3	1,553.3	0.0
N	13,355	106	315	6.5	1,569.5	1,569.5	1,569.5	0.0
O	14,152	95	158	4.7	1,580.4	1,580.4	1,580.4	0.0
P	15,448	90	62	5.4	1,606.2	1,606.2	1,606.2	0.0
Q	16,623	26	58	5.8	1,638.1	1,638.1	1,638.1	0.0
R	18,166	25	44	7.6	1,682.9	1,682.9	1,682.9	0.0
S	19,163	21	41	8.0	1,720.7	1,720.7	1,720.7	0.0
T	20,156	47	54	6.1	1,767.8	1,767.8	1,767.8	0.0

[1]Stream Distance in Feet Above Doubletree Ranch Road

TABLE 6

FEDERAL EMERGENCY MANAGEMENT AGENCY

MARICOPA COUNTY, AZ AND INCORPORATED AREAS

FLOODWAY DATA

WASH B

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Wash B Tributary								
A	732	128	250	4.3	1,581.2	1,581.2	1,581.2	0.0
B	1,306	110	253	4.2	1,590.3	1,590.3	1,590.3	0.0
C	1,979	42	147	7.2	1,601.9	1,601.9	1,601.9	0.0

[1]Stream Distance in Feet Above Confluence With Wash B

TABLE 6

FEDERAL EMERGENCY MANAGEMENT AGENCY

MARICOPA COUNTY, AZ AND INCORPORATED AREAS

FLOODWAY DATA

WASH B TRIBUTARY

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Wash E2								
A	1,250	153	199	5.3	2,063.6	2,063.6	2,063.6	0.0
B	2,120	130	152	4.7	2,083.7	2,083.7	2,083.7	0.0

[1]Stream Distance in Feet Above Confluence With Mockingbird Wash

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Wash F								
A	1,370	70	129	2.7	1,873.7	1,873.7	1,873.7	0.0
B	2,421	17	25	7.1	1,929.7	1,929.7	1,929.7	0.0
C	3,419	46	30	4.4	1,984.7	1,984.7	1,984.7	0.0
D	4,423	33	25	2.8	2,002.9	2,002.9	2,002.9	0.0
E	5,415	30	22	3.2	2,021.4	2,021.4	2,021.4	0.0
F	5,969	21	19	3.7	2,030.5	2,030.5	2,030.5	0.0

[1]Stream Distance in Feet Above Confluence With Hassayampa River

TABLE 6

FEDERAL EMERGENCY MANAGEMENT AGENCY

MARICOPA COUNTY, AZ AND INCORPORATED AREAS

FLOODWAY DATA

WASH F

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Wash F2								
A	248	38	34	5.1	1,876.5	1,876.5	1,876.5	0.0
B	1,246	39	36	4.7	1,913.6	1,913.6	1,913.6	0.0
C	2,250	36	32	5.4	1,954.7	1,954.7	1,954.7	0.0

[1]Stream Distance in Feet Above Confluence With Wash F

TABLE 6

FEDERAL EMERGENCY MANAGEMENT AGENCY

MARICOPA COUNTY, AZ AND INCORPORATED AREAS

FLOODWAY DATA

WASH F2

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Wash G								
A	753	50	329	1.6	1,897.2	1,897.2	1,897.2	0.0
B	1,434	31	64	6.5	1,906.9	1,906.9	1,906.9	0.0
C	1,946	27	56	7.6	1,936.6	1,936.6	1,936.6	0.0
D	2,950	43	71	5.9	1,965.6	1,965.6	1,965.6	0.0
E	3,959	50	66	5.4	1,987.2	1,987.2	1,987.2	0.0
F	4,889	57	40	3.8	2,003.9	2,003.9	2,003.9	0.0
G	5,792	41	37	4.1	2,023.8	2,023.8	2,023.8	0.0

[1]Stream Distance in Feet Above Confluence With Hassayampa River

TABLE 6

FEDERAL EMERGENCY MANAGEMENT AGENCY

MARICOPA COUNTY, AZ AND INCORPORATED AREAS

FLOODWAY DATA

WASH G

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Wash H								
A	1,164	262	357	4.7	1,901.4	1,901.4	1,901.4	0.0
B	2,162	57	175	9.5	1,925.1	1,925.1	1,925.1	0.0
C	3,118	77	200	8.3	1,945.0	1,945.0	1,945.0	0.0
D	3,989	201	297	5.6	1,961.6	1,961.6	1,961.6	0.0
E	5,161	222	367	4.6	1,979.5	1,979.5	1,979.5	0.0
F	6,127	238	376	4.5	1,997.1	1,997.1	1,997.1	0.0
G	7,162	238	361	4.7	2,013.2	2,013.2	2,013.2	0.0
H	8,166	417	457	3.7	2,028.6	2,028.6	2,028.6	0.0
I	8,931	185	362	4.7	2,039.8	2,039.8	2,039.8	0.0
J	9,945	254	359	4.8	2,054.1	2,054.1	2,054.1	0.0

[1]Stream Distance in Feet Above Confluence With Hassayampa River

TABLE 6

FEDERAL EMERGENCY MANAGEMENT AGENCY

MARICOPA COUNTY, AZ AND INCORPORATED AREAS

FLOODWAY DATA

WASH H

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Wash I								
A	726	80	538	3.3	1,935.8	1,935.8	1,936.5	0.7
B	1,873	133	314	5.7	1,957.7	1,957.7	1,957.7	0.0
C	3,135	264	393	4.4	1,986.2	1,986.2	1,986.2	0.0
D	4,444	142	273	6.2	2,016.6	2,016.6	2,016.6	0.0
E	5,569	81	207	8.1	2,042.3	2,042.3	2,042.3	0.0
F	6,583	62	194	8.7	2,063.4	2,063.4	2,063.4	0.0
G	7,079	62	211	8.0	2,072.7	2,072.7	2,072.7	0.0

[1]Stream Distance in Feet Above Confluence With Hassayampa River

TABLE 6

FEDERAL EMERGENCY MANAGEMENT AGENCY

MARICOPA COUNTY, AZ AND INCORPORATED AREAS

FLOODWAY DATA

WASH I

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Wash K								
A	1,186	461	3,806	0.7	1,967.8	1,967.8	1,967.8	0.0
B	2,353	151	389	6.4	1,985.0	1,985.0	1,985.0	0.0
C	3,383	103	312	8.0	2,008.0	2,008.0	2,008.0	0.0
D	4,387	82	276	8.8	2,049.9	2,049.9	2,049.9	0.0
E	5,385	99	316	7.7	2,077.6	2,077.6	2,077.6	0.0
F	6,383	88	261	8.8	2,098.5	2,098.5	2,098.5	0.0
G	7,307	152	336	6.8	2,120.1	2,120.1	2,120.1	0.0
H	8,183	154	330	6.9	2,138.9	2,138.9	2,138.9	0.0
I	8,996	367	412	5.2	2,154.8	2,154.8	2,154.8	0.0
J	10,051	101	249	8.6	2,176.7	2,176.7	2,176.7	0.0
K	11,134	346	330	5.9	2,197.8	2,197.8	2,197.8	0.0
L	12,143	109	270	7.2	2,221.7	2,221.7	2,221.7	0.0
M	12,634	332	358	5.4	2,231.5	2,231.5	2,231.5	0.0
N	14,186	208	329	5.3	2,265.1	2,265.1	2,265.1	0.0
O	15,163	142	266	6.5	2,285.0	2,285.0	2,285.0	0.0
P	16,050	157	190	5.0	2,304.1	2,304.1	2,304.1	0.0
Q	17,417	131	179	5.3	2,336.4	2,336.4	2,336.4	0.0
R	18,690	210	207	4.3	2,357.7	2,357.7	2,357.7	0.0
S	20,010	132	153	5.3	2,383.2	2,383.2	2,383.2	0.0
T	20,665	127	159	5.1	2,395.7	2,395.7	2,395.7	0.0

[1]Stream Distance in Feet Above Confluence With Hassayampa River

TABLE 6

FEDERAL EMERGENCY MANAGEMENT AGENCY

MARICOPA COUNTY, AZ AND INCORPORATED AREAS

FLOODWAY DATA

WASH K

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Wash K1								
A	370	319	170	5.0	2,305.0	2,305.0	2,305.0	0.0
B	1,321	126	184	2.6	2,326.5	2,326.5	2,326.5	0.0
C	2,397	21	55	8.7	2,350.3	2,350.3	2,350.3	0.0
D	3,389	99	92	4.3	2,373.9	2,373.9	2,373.9	0.0
E	4,397	72	70	4.7	2,398.3	2,398.3	2,398.3	0.0

[1]Stream Distance in Feet Above Confluence With Wash K

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Wash L								
A	1,229	130	696	1.2	1,986.2	1,986.2	1,986.2	0.0
B	2,125	206	192	4.2	2,000.0	2,000.0	2,000.0	0.0
C	2,625	121	152	5.3	2,012.1	2,012.1	2,012.1	0.0
D	3,824	139	153	5.2	2,041.3	2,041.3	2,041.3	0.0
E	5,229	31	91	8.9	2,071.6	2,071.6	2,071.6	0.0
F	6,014	34	98	8.2	2,104.4	2,104.4	2,104.5	0.1
G	7,020	29	100	8.0	2,136.9	2,136.9	2,137.0	0.1
H	7,522	42	110	7.3	2,153.7	2,153.7	2,153.7	0.0

[1]Stream Distance in Feet Above Palm Lake Spillway

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Wash O								
A	1,230	44	192	10.4	2,011.3	2,011.3	2,011.3	0.0
B	2,158	137	324	6.2	2,031.5	2,031.5	2,031.9	0.4
C	3,008	214	414	4.8	2,048.9	2,048.9	2,049.5	0.6
D	4,128	203	387	5.2	2,080.7	2,080.7	2,080.7	0.0
E	4,918	184	329	6.1	2,100.3	2,100.3	2,100.3	0.0
F	5,938	168	377	5.3	2,124.6	2,124.6	2,124.6	0.0
G	6,948	86	272	7.3	2,150.4	2,150.4	2,150.4	0.0
H	7,993	122	319	6.2	2,174.8	2,174.8	2,174.8	0.0
I	8,573	299	424	4.7	2,191.0	2,191.0	2,191.0	0.0

[1]Stream Distance in Feet Above Confluence With Hassayampa River

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Wash P								
A	600	250	211	4.3	2,102.9	2,102.9	2,102.9	0.0
B	1,020	96	175	4.1	2,114.8	2,114.8	2,114.8	0.0
C	1,475	157	157	4.2	2,124.3	2,124.3	2,124.3	0.0

[1]Stream Distance in Feet Above Mouth

TABLE 6

FEDERAL EMERGENCY MANAGEMENT AGENCY

MARICOPA COUNTY, AZ AND INCORPORATED AREAS

FLOODWAY DATA

WASH P

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Wash Q								
A	1,785	107	84	4.5	2,041.5	2,041.5	2,041.5	0.0
B	2,516	51	68	5.5	2,062.5	2,062.5	2,062.5	0.0
C	3,154	56	54	4.4	2,079.4	2,079.4	2,079.4	0.0
D	3,796	36	43	5.6	2,102.7	2,102.7	2,102.7	0.0
E	4,461	22	32	6.5	2,123.4	2,123.4	2,123.4	0.0
F	5,300	27	33	5.4	2,162.5	2,162.5	2,162.5	0.0
G	5,819	24	22	4.9	2,182.1	2,182.1	2,182.1	0.0

[1]Stream Distance in Feet Above Confluence With Hassayampa River

TABLE 6

FEDERAL EMERGENCY MANAGEMENT AGENCY

MARICOPA COUNTY, AZ AND INCORPORATED AREAS

FLOODWAY DATA

WASH Q

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Wash S2								
A	2,170	133	85	4.9	1,850.4	1,850.4	1,850.4	0.0
B	2,450	94	112	3.8	1,856.0	1,856.0	1,856.1	0.1

[1]Stream Distance in Feet Above Confluence With Little San Domingo Wash

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Wash T2N-R5W-S27N								
A	0	240	811	6.1	1,052.6	1,052.6	1,053.6	1.0
B	276	156	552	9.0	1,060.7	1,060.7	1,061.4	0.8
C	755	175	623	7.9	1,065.5	1,065.5	1,066.4	0.9
D	1,276	172	894	5.5	1,068.3	1,068.3	1,069.0	0.8
E	2,276	163	748	5.4	1,069.6	1,069.6	1,070.4	0.8
F	3,776	168	561	7.1	1,076.5	1,076.5	1,077.3	0.8
G	5,276	218	685	5.8	1,085.7	1,085.7	1,086.7	1.0
H	7,276	409	648	5.3	1,099.2	1,099.2	1,100.2	1.0
I	8,776	175	699	5.0	1,110.2	1,110.2	1,111.1	0.9
J	9,776	167	470	7.4	1,115.4	1,115.4	1,116.2	0.8
K	10,776	173	538	5.9	1,120.0	1,120.0	1,120.5	0.5
L	12,276	321	562	5.6	1,129.0	1,129.0	1,129.2	0.2
M	13,276	365	649	4.9	1,134.6	1,134.6	1,135.5	0.9
N	15,276	446	562	5.6	1,148.3	1,148.3	1,148.9	0.6
O	15,586	556	871	3.6	1,150.0	1,150.0	1,151.0	1.0
P	17,467	384	851	4.6	1,163.6	1,163.6	1,163.6	0.0
Q	17,980	249	398	0.8	1,165.1	1,165.1	1,165.2	0.1

[1]Stream Distance in Feet Above Confluence With Hassayampa River

TABLE 6

FEDERAL EMERGENCY MANAGEMENT AGENCY

MARICOPA COUNTY, AZ AND INCORPORATED AREAS

FLOODWAY DATA

WASH T2N-R5W-S27N

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Wash T4N-R3W-S07W								
A	950	92.36	75.95	5.1	1,598.5	1,598.5	1,598.6	0.1
B	1,678	121.36	201.87	1.9	1,603.7	1,603.7	1,604.1	0.4
C	2,524	114.25	149.57	2.1	1,608.8	1,608.8	1,609.1	0.3
D	3,068	156.9	159.16	2.0	1,611.4	1,611.4	1,611.6	0.2
E	6,004	176.75	143.44	1.5	1,629.3	1,629.3	1,629.5	0.2
F	6,542	127.84	117.23	1.9	1,651.0	1,651.0	1,651.2	0.2
G	10,528	191.15	120.82	1.8	1,657.0	1,657.0	1,657.0	0.0

[1]Stream Distance in Feet Above Confluence With Wash T4N-R3W-S17

TABLE 6

FEDERAL EMERGENCY MANAGEMENT AGENCY

MARICOPA COUNTY, AZ AND INCORPORATED AREAS

FLOODWAY DATA

WASH T4N-R3W-S07W

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Wash T4N-R3W-S08E								
A	1,415	71	334	6.3	1,572.4	1,572.4	1,573.2	0.8
B	2,421	64	305	6.9	1,580.2	1,580.2	1,580.9	0.7
C	2,911	61	286	7.4	1,582.5	1,582.5	1,583.4	0.9
D	3,870	88	307	6.8	1,588.5	1,588.5	1,589.1	0.6
E	5,300	110	353	6.0	1,600.3	1,600.3	1,601.2	0.9
F	7,857	179	481	4.4	1,617.5	1,617.5	1,618.1	0.6
G	8,479	233	387	5.4	1,619.6	1,619.6	1,619.8	0.2
H	8,792	177	401	5.2	1,622.0	1,622.0	1,622.3	0.3
I	9,168	136	405	5.2	1,623.9	1,623.9	1,624.7	0.8
J	10,937	174	429	4.9	1,635.3	1,635.3	1,636.1	0.8
K	12,364	130	440	4.8	1,644.5	1,644.5	1,645.4	0.9
L	14,245	100	242	8.7	1,654.9	1,654.9	1,655.6	0.7
M	14,661	176	571	3.7	1,657.8	1,657.8	1,658.8	1.0
N	15,621	191	538	3.9	1,663.7	1,663.7	1,664.6	0.9
O	17,353	158	353	6.0	1,674.1	1,674.1	1,674.3	0.2
P	17,749	191	483	4.4	1,677.2	1,677.2	1,677.8	0.6
Q	19,944	244	524	4.0	1,691.0	1,691.0	1,691.3	0.3
R	21,188	110	391	5.4	1,697.7	1,697.7	1,698.6	0.9
S	23,313	419	577	2.6	1,711.3	1,711.3	1,711.5	0.2
T	23,715	97	83	5.2	1,713.7	1,713.7	1,713.7	0.0
U	24,198	110	172	2.5	1,717.6	1,717.6	1,718.0	0.4
V	25,425	143	182	2.4	1,725.1	1,725.1	1,725.4	0.3

[1]Stream Distance in Feet Above Confluence With Wash 3 West

TABLE 6

FEDERAL EMERGENCY MANAGEMENT AGENCY

MARICOPA COUNTY, AZ AND INCORPORATED AREAS

FLOODWAY DATA

WASH T4N-R3W-S08E

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Wash T4N-R3W-S08W								
A	301	49	161	6.4	1,575.7	1,575.7	1,576.2	0.5
B	1,285	70	185	5.6	1,584.9	1,584.9	1,585.2	0.3
C	3,308	218	320	3.2	1,601.0	1,601.0	1,601.3	0.3
D	6,944	122	244	3.9	1,622.0	1,622.0	1,622.4	0.4
E	8,472	130	244	3.9	1,631.2	1,631.2	1,631.6	0.4
F	10,492	144	271	3.4	1,642.4	1,642.4	1,642.6	0.2
G	12,023	160	296	3.1	1,651.5	1,651.5	1,651.9	0.4
H	13,475	201	233	3.8	1,659.2	1,659.2	1,659.4	0.2
I	15,126	131	257	3.4	1,670.4	1,670.4	1,671.2	0.8
J	17,181	133	256	3.4	1,683.6	1,683.6	1,684.4	0.8

[1]Stream Distance in Feet Above Confluence With Wash 3 West

TABLE 6

FEDERAL EMERGENCY MANAGEMENT AGENCY

MARICOPA COUNTY, AZ AND INCORPORATED AREAS

FLOODWAY DATA

WASH T4N-R3W-S08W

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Wash T4N-R3W-S09W								
A	169	38	154	5.5	1,561.0	1,561.0	1,561.0	0.0
B	2,644	106	242	3.4	1,579.7	1,579.7	1,580.1	0.4
C	4,860	218	324	2.5	1,592.2	1,592.2	1,592.8	0.6
D	7,361	114	177	4.4	1,605.7	1,605.7	1,606.2	0.5
E	8,905	238	251	3.0	1,615.4	1,615.4	1,615.6	0.2
F	11,452	161	187	3.8	1,631.6	1,631.6	1,631.9	0.3
G	13,998	186	248	2.9	1,647.2	1,647.2	1,647.4	0.2

[1]Stream Distance in Feet Above Confluence With Wash 3 West

TABLE 6

FEDERAL EMERGENCY MANAGEMENT AGENCY

MARICOPA COUNTY, AZ AND INCORPORATED AREAS

FLOODWAY DATA

WASH T4N-R3W-S09W

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Wash T4N-R3W-S10N								
A	381	196	172	5.4	1,553.5	1,553.5	1,553.6	0.1
B	2,575	251	302	3.1	1,565.6	1,565.6	1,565.9	0.3
C	3,724	212	288	3.2	1,571.0	1,571.0	1,571.5	0.5
D	5,244	175	329	2.8	1,580.4	1,580.4	1,581.2	0.8
E	7,876	191	268	3.5	1,593.8	1,593.8	1,594.0	0.2

[1]Stream Distance in Feet Above the Central Arizona Project Canal

TABLE 6

FEDERAL EMERGENCY MANAGEMENT AGENCY

MARICOPA COUNTY, AZ AND INCORPORATED AREAS

FLOODWAY DATA

WASH T4N-R3W-S10N

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Wash T4N-R3W-S17								
A	808	125	373	4.3	1,555.4	1,555.4	1,555.6	0.2
B	985	154	409	3.9	1,556.1	1,556.1	1,556.9	0.8
C	2,546	164	385	3.2	1,565.5	1,565.5	1,566.5	1.0
D	5,656	220	314	2.6	1,582.4	1,582.4	1,582.6	0.2
E	7,685	358	337	2.4	1,593.5	1,593.5	1,593.9	0.4
F	10,155	119	164	2.6	1,606.0	1,606.0	1,606.6	0.6
G	11,219	128	99	2.5	1,610.9	1,610.9	1,610.9	0.0
H	14,557	104	110	2.3	1,632.8	1,632.8	1,633.1	0.3

[1]Stream Distance in Feet Above Confluence With Wash T4N-R3W-S18W

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Wash T4N-R3W-S18E								
A	1,204	186	216	5.5	1,569.3	1,569.3	1,569.3	0.0
B	1,723	161	409	2.9	1,572.6	1,572.6	1,573.3	0.7
C	2,728	129	316	3.4	1,577.9	1,577.9	1,578.5	0.6
D	4,641	220	351	3.0	1,589.0	1,589.0	1,589.4	0.4
E	5,270	153	312	3.0	1,591.5	1,591.5	1,592.2	0.7
F	6,293	155	274	3.4	1,597.6	1,597.6	1,598.3	0.7
G	8,841	110	229	3.5	1,612.5	1,612.5	1,613.5	1.0
H	11,933	227	236	2.8	1,630.5	1,630.5	1,630.8	0.3
I	11,983	242	283	2.3	1,630.1	1,630.1	1,630.3	0.2
J	16,565	142	159	2.8	1,657.7	1,657.7	1,658.4	0.7
K	19,506	249	114	2.5	1,675.7	1,675.7	1,675.8	0.1
L	20,830	273	80	1.5	1,686.6	1,686.6	1,686.6	0.0
M	22,343	89	61	2.0	1,696.6	1,696.6	1,696.9	0.3

[1]Stream Distance in Feet Above Confluence With Wash T4N-R3W-S18W

TABLE 6

FEDERAL EMERGENCY MANAGEMENT AGENCY

MARICOPA COUNTY, AZ AND INCORPORATED AREAS

FLOODWAY DATA

WASH T4N-R3W-S18E

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Wash T4N-R3W-S18W								
A	0	356	716	4.4	1,547.2	1,547.2	1,547.8	0.6
B	537	759	2,704	1.2	1,547.9	1,547.9	1,548.4	0.5
C	1,166	540	1,250	2.5	1,548.2	1,548.2	1,548.7	0.5
D	2,157	687	1,309	2.4	1,552.9	1,552.9	1,552.9	0.0
E	3,180	362	679	4.0	1,554.6	1,554.6	1,554.6	0.0
F	4,389	423	486	5.6	1,556.0	1,556.0	1,556.0	0.0
G	4,747	382	1,113	2.4	1,557.7	1,557.7	1,557.9	0.2
H	5,251	361	666	4.1	1,558.9	1,558.9	1,559.2	0.3
I	5,752	352	784	3.5	1,561.6	1,561.6	1,561.7	0.1
J	8,218	129	152	5.3	1,568.1	1,568.1	1,568.4	0.3
K	8,659	130	336	2.4	1,570.1	1,570.1	1,571.0	0.9
L	10,159	158	283	2.4	1,573.2	1,573.2	1,574.2	1.0
M	10,502	126	188	3.6	1,574.8	1,574.8	1,575.4	0.6
N	11,791	221	285	2.4	1,580.9	1,580.9	1,581.3	0.4
O	13,011	209	203	2.4	1,586.7	1,586.7	1,586.9	0.2
P	13,514	241	245	2.0	1,588.6	1,588.6	1,589.0	0.4
Q	16,455	187	134	2.6	1,604.4	1,604.4	1,604.4	0.0
R	20,125	151	132	1.9	1,624.4	1,624.4	1,624.5	0.1
S	22,045	147	127	2.0	1,636.5	1,636.5	1,636.7	0.2

[1]Stream Distance in Feet Above Confluence With Central Arizona Project Canal

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Wash T5N-R2W-S07								
A	1,239	416	580	4.7	1,734.4	1,734.4	1,735.4	1.0
B	2,059	355	569	4.8	1,743.7	1,743.7	1,743.9	0.2
C	4,117	963	930	3.3	1,763.9	1,763.9	1,764.8	0.9
D	5,527	532	628	4.3	1,778.7	1,778.7	1,779.6	0.9
E	6,524	113	146	4.5	1,789.4	1,789.4	1,789.7	0.3
F	7,552	203	225	2.9	1,799.2	1,799.2	1,799.8	0.6
G	8,293	282	307	3.3	1,807.8	1,807.8	1,808.3	0.5

[1]Stream Distance in Feet Above Confluence With Wash T5N-R2W-S19W

TABLE 6

FEDERAL EMERGENCY MANAGEMENT AGENCY

MARICOPA COUNTY, AZ AND INCORPORATED AREAS

FLOODWAY DATA

WASH T5N-R2W-S07

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Wash T5N-R2W-S19E								
A	69	71	297	8.0	1,601.7	1,601.7	1,602.3	0.6
B	396	72	501	4.8	1,604.0	1,604.0	1,604.4	0.4
C	795	87	507	4.7	1,604.8	1,604.8	1,605.3	0.5
D	1,268	103	597	4.0	1,610.9	1,610.9	1,611.9	1.0
E	2,082	91	336	4.9	1,618.7	1,618.7	1,619.1	0.4
F	2,656	156	253	6.6	1,622.6	1,622.6	1,623.5	0.9
G	3,094	219	413	4.0	1,626.7	1,626.7	1,627.7	1.0
H	4,512	190	347	4.8	1,638.3	1,638.3	1,639.3	1.0
I	7,013	490	507	3.3	1,659.2	1,659.2	1,660.2	1.0
J	7,492	110	196	7.6	1,664.9	1,664.9	1,665.8	0.9
K	8,719	143	316	4.7	1,676.5	1,676.5	1,677.4	0.9
L	9,801	30	65	4.1	1,683.7	1,683.7	1,684.1	0.4
M	10,831	41	66	4.1	1,694.4	1,694.4	1,694.4	0.0

[1]Stream Distance in Feet Above Confluence With 203rd Avenue and U.S. Route 60

TABLE 6

FEDERAL EMERGENCY MANAGEMENT AGENCY

MARICOPA COUNTY, AZ AND INCORPORATED AREAS

FLOODWAY DATA

WASH T5N-R2W-S19E

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Wash T5N-R2W-S19W								
A	454	59	374	7.5	1,628.4	1,628.4	1,628.4	0.0
B	867	64	283	9.9	1,630.3	1,630.3	1,630.3	0.0
C	1,755	366	578	4.8	1,643.0	1,643.0	1,643.7	0.7
D	2,157	358	512	5.5	1,646.1	1,646.1	1,647.1	1.0
E	2,628	480	805	5.3	1,650.8	1,650.8	1,651.8	1.0
F	4,044	478	891	4.8	1,662.5	1,662.5	1,663.5	1.0
G	4,884	355	875	4.9	1,671.0	1,671.0	1,672.0	1.0
H	6,446	508	1072	5.2	1,684.8	1,684.8	1,685.8	1.0
I	7,359	355	861	6.5	1,692.3	1,692.3	1,693.2	0.9
J	7,759	311	1547	3.6	1,693.4	1,693.4	1,694.3	1.0
K	8,969	148	355	7.7	1,706.8	1,706.8	1,707.3	0.5
L	9,406	186	473	5.8	1,709.7	1,709.7	1,710.4	0.7
M	10,471	182	389	7.0	1,718.9	1,718.9	1,719.5	0.6
N	11,922	131	163	4.9	1,731.2	1,731.2	1,731.8	0.6
O	13,130	42	130	6.1	1,745.9	1,745.9	1,746.8	0.9
P	14,350	65	128	6.3	1,758.1	1,758.1	1,758.3	0.2
Q	14,690	69	139	5.8	1,762.3	1,762.3	1,762.3	0.0
R	16,973	58	151	5.3	1,786.2	1,786.2	1,786.8	0.6
S	17,907	29	115	7.0	1,797.7	1,797.7	1,798.3	0.6
T	18,360	56	143	5.6	1,801.7	1,801.7	1,802.4	0.7
U	19,841	127	205	3.9	1,823.0	1,823.0	1,823.2	0.2

[1]Stream Distance in Feet Above of U.S. Route 60

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Wash T5N-R3W-S01S								
A	2,303	229	347	6.5	1,792.8	1,792.8	1,793.0	0.2
B	2,874	118	327	6.9	1,799.8	1,799.8	1,800.2	0.4
C	3,259	166	324	6.9	1,802.9	1,802.9	1,803.8	0.9
D	3,467	134	301	7.4	1,805.9	1,805.9	1,806.5	0.6
E	4,921	223	342	6.6	1,821.5	1,821.5	1,822.5	1.0

[1]Stream Distance in Feet Above Confluence With Wash T5N-R2W-S07

TABLE 6

FEDERAL EMERGENCY MANAGEMENT AGENCY

MARICOPA COUNTY, AZ AND INCORPORATED AREAS

FLOODWAY DATA

WASH T5N-R3W-S01S

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Wash T5N-R3W-S19								
A	973	113	205	5.2	1,714.9	1,714.9	1,715.2	0.3
B	1,779	133	245	4.4	1,720.5	1,720.5	1,721.2	0.7
C	2,619	112	115	5.7	1,725.1	1,725.1	1,725.5	0.4
D	3,039	117	192	3.4	1,728.2	1,728.2	1,729.2	1.0

[1]Stream Distance in Feet Above Confluence With Wash T4N-R3W-S08E

TABLE 6

FEDERAL EMERGENCY MANAGEMENT AGENCY

MARICOPA COUNTY, AZ AND INCORPORATED AREAS

FLOODWAY DATA

WASH T5N-R3W-S19

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Wash T5N-R3W-S24E								
A	1,363	170	347	4.8	1,631.9	1,631.9	1,632.9	1.0
B	2,890	138	355	4.7	1,644.2	1,644.2	1,645.1	0.9
C	3,569	55	291	5.7	1,651.8	1,651.8	1,651.9	0.1
D	3,818	112	420	4.0	1,652.9	1,652.9	1,652.9	0.0
E	4,244	95	204	8.1	1,655.4	1,655.4	1,655.6	0.2
F	5,462	106	287	5.8	1,667.3	1,667.3	1,668.1	0.8
G	5,815	106	214	7.8	1,670.1	1,670.1	1,671.0	0.9
H	7,324	90	232	7.2	1,686.3	1,686.3	1,687.2	0.9
I	9,495	136	284	5.9	1,708.6	1,708.6	1,709.6	1.0
J	10,049	161	325	5.1	1,715.4	1,715.4	1,716.1	0.7
K	10,420	187	385	4.3	1,718.6	1,718.6	1,719.6	1.0
L	11,411	96	147	3.5	1,730.6	1,730.6	1,731.2	0.6
M	11,827	122	130	3.9	1,734.1	1,734.1	1,735.0	0.9
N	13,312	129	137	3.7	1,749.9	1,749.9	1,750.4	0.5

[1]Stream Distance in Feet Above Confluence With Wittmann Wash

TABLE 6

FEDERAL EMERGENCY MANAGEMENT AGENCY

MARICOPA COUNTY, AZ AND INCORPORATED AREAS

FLOODWAY DATA

WASH T5N-R3W-S24E

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Waterfall Wash								
A	1,088	675	890	2.5	1,284.4	1,284.4	1,285.1	0.7
B	2,292	301	477	4.7	1,296.9	1,296.9	1,297.2	0.3
C	3,089	275	457	4.9	1,304.8	1,304.8	1,305.6	0.8
D	4,609	343	433	5.3	1,323.0	1,323.0	1,323.0	0.0
E	7,139	297	319	7.2	1,360.5	1,360.5	1,360.5	0.0
F	9,008	88	241	9.5	1,390.5	1,390.5	1,390.6	0.1
G	10,998	57	214	10.7	1,424.0	1,424.0	1,424.0	0.0
H	13,469	74	202	9.0	1,470.9	1,470.9	1,470.9	0.0
I	15,998	95	216	8.4	1,526.9	1,526.9	1,526.9	0.0
J	18,770	61	183	9.9	1,647.9	1,647.9	1,647.9	0.0

[1]Stream Distance in Feet Above Confluence With Beardsley Canal Wash

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Waterman Wash								
A	1,267	2,200	6,883	4.9	866.6	866.6	867.3	0.7
B	2,429	920	3,520	9.5	872.1	872.1	872.7	0.6
C	3,390	1,030	6,127	5.5	877.4	877.4	878.4	1.0
D	4,435	762	3,486	9.6	880.8	880.8	881.8	1.0
E	5,650	600	3,563	9.4	885.6	885.6	886.5	0.9
F	6,283	400	3,164	10.6	889.3	889.3	890.1	0.8
G	7,408	450	2,772	12.1	894.6	894.6	894.7	0.1
H	8,279	339	2,616	12.8	899.6	899.6	900.4	0.8
I	9,182	420	3,815	8.8	905.6	905.6	905.7	0.1
J	10,307	374	2,399	14	909.2	909.2	909.3	0.1
K	11,262	431	3,626	9.3	914.5	914.5	914.6	0.1
L	12,144	500	3,604	9.3	916.5	916.5	916.8	0.3
M	12,989	700	4,664	7.2	919.3	919.3	920.2	0.9
N	13,976	800	4,005	8.4	923.5	923.5	923.7	0.2
O	15,259	621	4,726	7.1	927.4	927.4	927.7	0.3
P	15,998	660	3,759	8.9	929.6	929.6	929.8	0.2
Q	17,107	730	4,724	7.1	933.1	933.1	933.5	0.4
R	18,110	931	4,947	6.8	936.0	936.0	936.4	0.4
S	19,166	1,240	5,220	6.4	939.0	939.0	939.5	0.5
T	20,328	980	4,917	6.8	942.5	942.5	942.8	0.3
U	21,518	780	3,391	9.9	948.5	948.5	948.7	0.2
V	22,403	900	5,430	6.2	953.1	953.1	953.9	0.8
W	23,443	1,000	3,861	8.7	958.7	958.7	958.9	0.2
X	24,900	1,400	1,691	4.4	963.7	963.7	964.7	1.0
Y	25,898	1,400	5,220	6.4	967.8	967.8	968.0	0.2
Z	26,770	1,367	5,017	6.7	972.0	972.0	972.1	0.1

[1]Stream Distance in Feet Above confluence With Gila River

TABLE 6

FEDERAL EMERGENCY MANAGEMENT AGENCY

MARICOPA COUNTY, AZ AND INCORPORATED AREAS

FLOODWAY DATA

WATERMAN WASH

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Waterman Wash								
AA	27,984	1,600	7,238	4.6	976.2	976.2	976.9	0.7
AB	28,776	1,620	4,970	6.8	978.2	978.2	978.4	0.2
AC	29,652	1,700	5,886	5.7	981.1	981.1	982.1	1.0
AD	30,708	1,400	5,318	6.3	985.9	985.9	986.0	0.1
AE	31,754	1,388	5,833	4.7	989.4	989.4	989.9	0.5
AF	33,158	1,250	4,823	5.7	991.9	991.9	992.6	0.7
AG	34,241	1,316	5,033	5.4	995.0	995.0	995.7	0.7
AH	35,302	1,313	4,969	5.5	997.8	997.8	998.6	0.8
AI	36,316	1,208	3,961	6.9	1,001.3	1,001.3	1,001.5	0.2
AJ	37,393	1,552	5,326	5.1	1,004.9	1,004.9	1,005.9	1.0
AK	38,333	2,120	4,794	5.7	1,008.8	1,008.8	1,009.3	0.5
AL	39,547	2,140	5,980	4.6	1,011.3	1,011.3	1,012.2	0.9
AM	40,381	1,920	7,603	3.6	1,013.0	1,013.0	1,013.9	0.9
AN	41,168	1,700	4,100	6.7	1,015.6	1,015.6	1,016.1	0.5
AO	42,229	1,526	5,034	5.4	1,022.9	1,022.9	1,023.4	0.5
AP	43,101	1,550	6,966	3.9	1,024.9	1,024.9	1,025.8	0.9
AQ	43,808	1,624	5,116	5.3	1,026.1	1,026.1	1,026.8	0.7
AR	44,869	1,750	4,734	5.8	1,029.5	1,029.5	1,030.1	0.6
AS	46,031	1,720	6,931	3.9	1,032.2	1,032.2	1,033.1	0.9
AT	47,193	1,780	7,131	3.8	1,036.0	1,036.0	1,037.0	1.0
AU	48,565	1,580	5,142	5.3	1,040.6	1,040.6	1,040.6	0.0
AV	49,632	1,520	5,669	4.8	1,044.6	1,044.6	1,045.4	0.8
AW	50,757	1,563	5,835	4.7	1,048.8	1,048.8	1,048.8	0.0
AX	51,934	1,650	6,507	4.2	1,053.7	1,053.7	1,054.3	0.6
AY	52,948	1,950	9,122	3	1,056.5	1,056.5	1,057.3	0.8
AZ	53,814	2,250	7,727	3	1,057.9	1,057.9	1,058.5	0.6

[1]Stream Distance in Feet Above confluence With Gila River

TABLE 6

FEDERAL EMERGENCY MANAGEMENT AGENCY

MARICOPA COUNTY, AZ AND INCORPORATED AREAS

FLOODWAY DATA

WATERMAN WASH

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Waterman Wash								
BA	54,912	2,194	4,210	5.4	1,060.7	1,060.7	1,060.8	0.1
BB	56,037	2,450	7,749	2.9	1,065.2	1,065.2	1,065.8	0.6
BC	57,066	2,550	5,363	4.3	1,068.4	1,068.4	1,068.8	0.4
BD	58,592	2,510	6,657	3.4	1,071.4	1,071.4	1,072.3	0.9
BE	59,796	2,620	6,054	3.8	1,075.7	1,075.7	1,075.9	0.2
BF	60,995	2,520	7,009	3.3	1,077.7	1,077.7	1,078.7	1.0
BC	62,536	2,150	6,665	3.4	1,083.0	1,083.0	1,083.8	0.8
BH	63,840	1,710	5,892	3.9	1,086.8	1,086.8	1,087.0	0.2
BI	65,551	1,487	4,759	4.8	1,090.9	1,090.9	1,091.2	0.3
BJ	66,845	1,100	4,220	5.4	1,093.9	1,093.9	1,094.8	0.9
BK	67,980	1,001	3,359	6.8	1,098.2	1,098.2	1,098.7	0.5
BL	69,068	1,068	4,143	5.5	1,101.1	1,101.1	1,101.9	0.8
BM	70,224	1,140	5,411	4.2	1,103.7	1,103.7	1,104.6	0.9
BN	72,162	626	2,609	8.8	1,110.1	1,110.1	1,110.4	0.3
BO	73,355	769	3,514	6.5	1,115.0	1,115.0	1,115.8	0.8
BP	74,649	796	4,069	5.6	1,117.9	1,117.9	1,118.8	0.9
BQ	75,662	778	3,444	6.6	1,120.3	1,120.3	1,120.9	0.6
BR	76,887	1,150	4,850	4.7	1,123.5	1,123.5	1,124.4	0.9
BS	77,933	1,150	7,717	3	1,125.3	1,125.3	1,126.1	0.8
BT	78,947	1,030	4,672	4.9	1,125.8	1,125.8	1,126.7	0.9
BU	79,876	840	2,755	8.3	1,129.4	1,129.4	1,129.6	0.2
BV	80,932	850	3,977	5.7	1,134.3	1,134.3	1,135.1	0.8
BW	81,671	727	3,032	7.5	1,137.3	1,137.3	1,137.9	0.6
BX	82,368	508	2,463	9.3	1,140.7	1,140.7	1,140.9	0.2

[1]Stream Distance in Feet Above confluence With Gila River

TABLE 6

FEDERAL EMERGENCY MANAGEMENT AGENCY

MARICOPA COUNTY, AZ AND INCORPORATED AREAS

FLOODWAY DATA

WATERMAN WASH

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
West Fork White Peak Wash								
A	496	56	54	5.5	1,466.4	1,466.4	1,466.4	0.0
B	998	24	45	6.5	1,473.1	1,473.1	1,473.1	0.0
C	1,500	30	42	6.9	1,481.0	1,481.0	1,481.3	0.3
D	1,996	30	55	5.4	1,486.8	1,486.8	1,487.1	0.3
E	2,497	19	37	7.9	1,496.1	1,496.1	1,496.1	0.0
F	2,999	24	41	7.2	1,503.8	1,503.8	1,503.8	0.0
G	3,495	26	41	7.2	1,514.4	1,514.4	1,514.4	0.0
H	3,897	27	49	6.0	1,519.4	1,519.4	1,519.4	0.0

[1]Stream Distance in Feet Above Confluence With White Peak Wash

TABLE 6

FEDERAL EMERGENCY MANAGEMENT AGENCY

MARICOPA COUNTY, AZ AND INCORPORATED AREAS

FLOODWAY DATA

WEST FORK WHITE PEAK WASH

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
West Garambullo Wash								
A	1,500	58	115	4.2	1,432.1	1,432.1	1,432.4	0.3
B	1,996	65	134	3.6	1,438.1	1,438.1	1,438.2	0.1
C	2,497	35	63	7.6	1,441.2	1,441.2	1,441.2	0.0
D	2,999	48	120	4.0	1,445.2	1,445.2	1,445.4	0.2
E	3,495	21	52	9.2	1,450.4	1,450.4	1,450.4	0.0
F	3,997	52	112	4.3	1,455.4	1,455.4	1,455.7	0.3
G	4,499	39	68	7.2	1,459.9	1,459.9	1,460.2	0.3
H	5,000	24	78	6.2	1,465.2	1,465.2	1,465.7	0.5
I	5,496	40	79	6.1	1,470.5	1,470.5	1,470.5	0.0
J	5,998	28	61	7.9	1,476.7	1,476.7	1,476.8	0.1
K	6,500	33	79	6.1	1,483.4	1,483.4	1,483.4	0.0
L	6,985	32	62	7.8	1,489.2	1,489.2	1,489.2	0.0
M	7,498	30	69	7.0	1,497.0	1,497.0	1,497.0	0.0
N	7,999	46	79	6.1	1,503.7	1,503.7	1,503.7	0.0
O	8,496	24	62	7.8	1,510.4	1,510.4	1,510.4	0.0
P	8,897	24	55	8.8	1,518.1	1,518.1	1,518.1	0.0

[1]Stream Distance in Feet Above Confluence With Twin Buttes Wash

TABLE 6

FEDERAL EMERGENCY MANAGEMENT AGENCY

MARICOPA COUNTY, AZ AND INCORPORATED AREAS

FLOODWAY DATA

WEST GARAMBULLO WASH

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
West Quilotosa Wash								
A	1,262	2,150	3,324	4.6	719.1	719.1	720.1	1.0
B	1,874	2,350	7,328	2.1	724.9	724.9	725.0	0.1
C	2,973	600	1,576	6.7	729.2	729.2	729.4	0.2
D	3,453	500	1,905	5.6	732.6	732.6	733.0	0.4
E	3,918	540	1,900	5.6	734.6	734.6	735.3	0.7
F	4,393	650	1,858	5.9	737.5	737.5	738.0	0.5
G	5,375	1,385	5,690	1.4	745.4	745.4	746.3	0.9
H	5,845	1,450	2,629	4.0	745.7	745.7	746.7	1.0
I	6,347	1,460	2,616	4.0	749.0	749.0	749.5	0.5
J	6,827	1,475	2,759	4.0	751.0	751.0	752.0	1.0
K	7,239	1,350	2,666	3.5	753.4	753.4	754.0	0.6
L	7,651	1,250	2,546	3.8	755.6	755.6	756.2	0.6
M	7,999	1,200	2,502	3.5	757.1	757.1	758.0	0.9
N	8,411	1,100	2,543	2.5	758.6	758.6	759.5	0.9
O	8,844	910	1,913	4.0	760.1	760.1	760.7	0.6
P	9,356	850	1,718	4.3	762.6	762.6	763.3	0.7
Q	9,889	1,100	2,329	3.1	765.0	765.0	766.0	1.0
R	10,396	1,050	1,700	3.3	767.2	767.2	768.2	1.0
S	10,866	1,200	1,846	3.6	771.0	771.0	771.8	0.8
T	11,378	1,040	1,914	4.1	774.6	774.6	775.0	0.4

[1]Stream Distance in Feet Above Confluence With Quilotosa Wash

TABLE 6

FEDERAL EMERGENCY MANAGEMENT AGENCY

MARICOPA COUNTY, AZ AND INCORPORATED AREAS

FLOODWAY DATA

WEST QUILOTOSA WASH

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
White Granite Wash								
A	0	105	928	2.1	1,349.6	1,349.6	1,349.6	0.0
B	1,711	310	328	5.9	1,374.6	1,374.6	1,374.6	0.0
C	3,089	128	246	7.9	1,400.9	1,400.9	1,400.9	0.0
D	4,103	50	106	3.3	1,420.7	1,420.7	1,420.7	0.0
E	6,098	51	60	5.7	1,462.1	1,462.1	1,462.1	0.0
F	7,624	36	55	6.2	1,513.6	1,513.6	1,513.6	0.0

[1]Stream Distance in Feet Above Retention Basin

TABLE 6

FEDERAL EMERGENCY MANAGEMENT AGENCY

MARICOPA COUNTY, AZ AND INCORPORATED AREAS

FLOODWAY DATA

WHITE GRANITE WASH

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
White Granite Wash North Fork								
A	977	80	186	7.3	1,428.9	1,428.9	1,428.9	0.0
B	1,980	38	128	10.6	1,460.7	1,460.7	1,460.7	0.0
C	2,973	85	208	6.5	1,495.6	1,495.6	1,495.6	0.0
D	3,490	64	166	8.1	1,512.1	1,512.1	1,512.1	0.0

[1]Stream Distance in Feet Above Confluence With White Granite Wash

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
White Peak Wash								
A	496	75	108	6.7	1,376.8	1,376.8	1,376.8	0.0
B	998	102	246	2.9	1,379.3	1,379.3	1,380.1	0.8
C	1,500	52	149	4.8	1,381.9	1,381.9	1,381.9	0.0
D	1,996	45	102	7.1	1,385.4	1,385.4	1,385.7	0.3
E	2,497	126	247	2.9	1,389.5	1,389.5	1,389.5	0.0
F	2,999	27	76	9.5	1,392.8	1,392.8	1,392.8	0.0
G	3,495	104	209	3.4	1,398.4	1,398.4	1,398.4	0.0
H	3,997	77	139	5.2	1,401.6	1,401.6	1,401.6	0.0
I	4,499	72	159	4.5	1,406.0	1,406.0	1,406.0	0.0
J	5,000	44	122	5.9	1,409.6	1,409.6	1,409.6	0.0
K	5,496	49	122	5.9	1,414.3	1,414.3	1,414.3	0.0
L	5,998	69	155	4.6	1,418.7	1,418.7	1,418.7	0.0
M	6,500	37	104	6.9	1,423.0	1,423.0	1,423.0	0.0
N	6,985	80	176	4.1	1,426.8	1,426.8	1,427.4	0.6
O	7,498	38	127	5.7	1,429.5	1,429.5	1,430.2	0.7
P	7,799	36	84	7.1	1,432.1	1,432.1	1,432.2	0.1
Q	7,999	44	120	5.0	1,432.9	1,432.9	1,433.8	0.9
R	8,496	38	74	8.1	1,438.6	1,438.6	1,438.6	0.0
S	8,997	36	89	6.7	1,444.1	1,444.1	1,444.1	0.0
T	9,499	23	64	9.4	1,449.2	1,449.2	1,449.2	0.0
U	9,995	37	87	6.9	1,455.6	1,455.6	1,455.6	0.0
V	10,497	53	100	4.0	1,460.9	1,460.9	1,460.9	0.0
W	10,998	31	53	7.5	1,464.6	1,464.6	1,464.6	0.0
X	11,500	39	63	6.2	1,471.6	1,471.6	1,471.6	0.0
Y	11,996	46	81	4.9	1,476.1	1,476.1	1,476.1	0.0
Z	12,498	35	55	7.2	1,481.0	1,481.0	1,481.0	0.0

[1]Stream Distance in Feet Above Confluence With Twin Buttes Wash

TABLE 6

FEDERAL EMERGENCY MANAGEMENT AGENCY

MARICOPA COUNTY, AZ AND INCORPORATED AREAS

FLOODWAY DATA

WHITE PEAK WASH

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
White Peak Wash (Cont'd)								
AA	12,999	39	75	5.2	1,486.2	1,486.2	1,486.2	0.0
AB	13,496	37	55	7.1	1,491.7	1,491.7	1,491.7	0.0
AC	13,997	29	65	6.1	1,497.3	1,497.3	1,497.3	0.0
AD	14,499	33	59	6.7	1,501.8	1,501.8	1,501.8	0.0
AE	14,995	32	53	7.4	1,509.1	1,509.1	1,509.1	0.0
AF	15,597	36	107	3.7	1,517.7	1,517.7	1,517.7	0.0

[1]Stream Distance in Feet Above Confluence With Twin Buttes Wash

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
White Tanks No. 3 Wash								
A	433	81	209	8.3	1,200.1	1,200.1	1,200.1	0.0
B	1,288	104	349	5.0	1,206.0	1,206.0	1,206.0	0.0
C	2,233	155	243	7.2	1,211.2	1,211.2	1,211.2	0.0
D	4,219	109	258	6.8	1,221.7	1,221.7	1,221.8	0.1
E	6,225	92	207	7.4	1,246.7	1,246.7	1,246.7	0.0
F	8,237	106	234	6.5	1,270.7	1,270.7	1,270.7	0.0
G	10,180	111	226	5.8	1,296.4	1,296.4	1,296.4	0.0
H	11,268	48	153	8.6	1,312.3	1,312.3	1,312.3	0.0
I	12,165	84	196	6.7	1,327.0	1,327.0	1,327.0	0.0
J	14,129	45	84	7.8	1,363.0	1,363.0	1,363.0	0.0
K	15,645	48	89	7.3	1,401.4	1,401.4	1,401.4	0.0
L	17,144	108	130	5.0	1,446.2	1,446.2	1,446.2	0.0

[1]Stream Distance in Feet Above White Tanks Structure #3

TABLE 6

FEDERAL EMERGENCY MANAGEMENT AGENCY

MARICOPA COUNTY, AZ AND INCORPORATED AREAS

FLOODWAY DATA

WHITE TANKS NO. 3 WASH

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
White Tanks Wash								
A	3,016	318	1,294	5.6	1,084.1	1,084.1	1,084.4	1.0
B	5,026	208	973	6.4	1,094.4	1,094.4	1,095.0	0.6
C	6,985	225	982	6.4	1,103.9	1,103.9	1,104.4	0.5
D	9,387	192	1,001	6.3	1,116.5	1,116.5	1,117.3	0.8
E	11,350	173	1,005	6.2	1,125.8	1,125.8	1,126.3	0.5
F	13,305	230	823	7.6	1,135.7	1,135.7	1,136.1	0.4
G	15,435	190	1,052	5.9	1,147.5	1,147.5	1,148.0	0.5
H	17,066	260	1,017	6.2	1,154.1	1,154.1	1,154.7	0.6
I	18,528	375	1,314	4.8	1,161.0	1,161.0	1,161.7	0.7
J	20,461	202	843	7.4	1,171.5	1,171.5	1,171.9	0.4
K	21,940	220	1,044	5.9	1,179.9	1,179.9	1,180.5	0.6
L	25,135	325	1,409	4.4	1,196.1	1,196.1	1,196.7	0.6
M	26,685	225	1,072	5.8	1,203.9	1,203.9	1,204.7	0.8
N	28,435	445	1,488	4.2	1,211.0	1,211.0	1,211.5	0.5
O	29,780	350	1,095	5.7	1,218.4	1,218.4	1,218.8	0.4
P	31,215	250	841	4.4	1,226.9	1,226.9	1,227.5	0.6
Q	33,060	216	794	4.3	1,236.9	1,236.9	1,237.7	0.8
R	35,160	297	710	4.4	1,249.2	1,249.2	1,249.7	0.5
S	37,565	311	740	3.7	1,266.2	1,266.2	1,266.7	0.5
T	39,530	175	500	5.5	1,281.5	1,281.5	1,282.0	0.5
U	41,145	320	661	3.2	1,294.9	1,294.9	1,295.5	0.6
V	43,390	189	409	5.2	1,313.4	1,313.4	1,314.3	0.9
W	44,400	144	317	3.9	1,321.4	1,321.4	1,321.8	0.4

[1]Stream Distance in Feet Above Buckeye Flood Retarding Structure

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
White Tanks Wash Tributary 1								
A	1,350	64	112	7.3	1,168.9	1,168.9	1,169.1	0.2
B	2,370	100	199	4.1	1,175.6	1,175.6	1,176.1	0.5
C	3,790	130	240	3.4	1,185.0	1,185.0	1,185.3	0.3
D	5,305	200	261	3.1	1,197.3	1,197.3	1,197.8	0.5
E	6,925	229	207	3.9	1,211.3	1,211.3	1,211.4	0.1
F	8,445	185	245	3.3	1,224.2	1,224.2	1,224.8	0.6
G	10,030	556	230	3.6	1,238.3	1,238.3	1,238.9	0.6
H	11,695	207	239	3.4	1,253.7	1,253.7	1,254.3	0.6
I	13,185	174	263	3.1	1,267.1	1,267.1	1,267.3	0.2
J	15,175	221	182	4.2	1,287.7	1,287.7	1,287.9	0.2
K	16,635	150	226	3.4	1,302.7	1,302.7	1,302.9	0.2
L	18,165	201	210	2.9	1,317.5	1,317.5	1,317.5	0.0
M	19,145	85	107	5.6	1,328.2	1,328.2	1,328.2	0.0
N	20,155	200	221	2.7	1,338.4	1,338.4	1,338.4	0.0

[1]Stream Distance in Feet Above Confluence With White Tanks Wash

TABLE 6

FEDERAL EMERGENCY MANAGEMENT AGENCY

MARICOPA COUNTY, AZ AND INCORPORATED AREAS

FLOODWAY DATA

WHITE TANKS WASH TRIBUTARY 1

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Willow Springs Wash								
A	1,320	82	496	12.6	2,069.3	2,069.3	2,069.3	0.0
B	1,690	77	551	11.3	2,073.4	2,073.4	2,073.4	0.0
C	2,059	60	412	15.1	2,076.0	2,076.0	2,076.0	0.0
D	2,482	65	445	14.1	2,080.6	2,080.6	2,080.6	0.0
E	2,851	59	413	15.2	2,084.3	2,084.3	2,084.3	0.0
F	3,168	78	454	13.8	2,089.4	2,089.4	2,089.4	0.0
G	3,696	109	524	12.0	2,097.3	2,097.3	2,097.3	0.0
H	4,171	183	756	8.4	2,102.9	2,102.9	2,102.9	0.0
I	4,435	260	459	10.5	2,105.4	2,105.4	2,105.4	0.0
J	4,699	292	725	6.6	2,112.4	2,112.4	2,112.4	0.0
K	5,386	177	588	8.2	2,122.8	2,122.8	2,122.8	0.0
L	5,755	279	656	7.3	2,128.6	2,128.6	2,128.6	0.0
M	6,283	332	698	6.9	2,137.2	2,137.2	2,137.2	0.0
N	6,706	299	660	7.3	2,144.4	2,144.4	2,144.4	0.0
O	7,075	346	732	6.6	2,149.9	2,149.9	2,149.9	0.0
P	7,392	429	745	6.4	2,156.5	2,156.5	2,156.5	0.0
Q	7,814	403	709	6.8	2,164.3	2,164.3	2,164.3	0.0
R	8,290	160	494	9.7	2,171.5	2,171.5	2,171.5	0.0
S	8,976	78	373	12.9	2,181.3	2,181.3	2,181.3	0.0
T	9,398	53	337	14.3	2,190.5	2,190.5	2,190.5	0.0
U	10,085	44	310	15.1	2,211.5	2,211.5	2,211.6	0.1
V	11,088	51	251	12.7	2,235.5	2,235.5	2,235.5	0.0
W	11,986	60	265	12.0	2,254.9	2,254.9	2,254.9	0.0
X	12,936	94	332	9.6	2,275.5	2,275.5	2,275.9	0.4
Y	14,150	107	360	8.9	2,304.3	2,304.3	2,304.8	0.5
Z	15,048	37	226	14.1	2,323.4	2,323.4	2,323.4	0.0

[1]Stream Distance in Feet Above Confluence With Cave Creek

TABLE 6

FEDERAL EMERGENCY MANAGEMENT AGENCY

MARICOPA COUNTY, AZ AND INCORPORATED AREAS

FLOODWAY DATA

WILLOW SPRINGS WASH

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Willow Springs Wash (Cont'd)								
AA	16,104	41	230	12.7	2,360.1	2,360.1	2,360.1	0.0
AB	17,054	107	345	8.5	2,382.2	2,382.2	2,382.7	0.5
AC	17,899	39	223	13.1	2,404.4	2,404.4	2,404.4	0.0
AD	18,955	23	192	15.2	2,432.2	2,432.2	2,432.4	0.2
AE	20,117	42	176	11.5	2,465.3	2,465.3	2,465.6	0.3
AF	21,331	25	147	13.8	2,503.4	2,503.4	2,503.4	0.0
AG	22,387	111	243	8.3	2,535.7	2,535.7	2,536.4	0.7
AH	23,707	26	79	9.1	2,583.0	2,583.0	2,583.5	0.5

[1]Stream Distance in Feet Above Confluence With Cave Creek

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Willow Springs Wash Tributary 1								
A	898	40	157	9.1	2,113.6	2,113.6	2,114.0	0.4
B	1,848	56	172	8.3	2,123.8	2,123.8	2,124.0	0.2
C	3,326	74	175	8.2	2,139.7	2,139.7	2,140.1	0.4
D	4,118	36	131	11.0	2,147.9	2,147.9	2,148.0	0.1
E	5,174	57	124	8.6	2,159.2	2,159.2	2,159.2	0.0
F	6,283	42	113	9.4	2,177.4	2,177.4	2,177.4	0.0
G	6,864	48	118	9.0	2,187.8	2,187.8	2,187.8	0.0
H	7,656	70	134	7.9	2,205.5	2,205.5	2,205.6	0.1
I	8,342	42	80	7.9	2,215.5	2,215.5	2,215.8	0.3
J	9,134	27	71	8.9	2,231.7	2,231.7	2,232.2	0.5
K	9,926	22	69	9.1	2,254.6	2,254.6	2,255.1	0.5
L	10,771	21	67	9.4	2,273.7	2,273.7	2,274.1	0.4
M	11,827	25	69	9.2	2,299.5	2,299.5	2,300.0	0.5
N	12,778	20	67	9.4	2,329.5	2,329.5	2,329.5	0.0
O	13,886	17	63	10.0	2,357.3	2,357.3	2,357.7	0.4
P	14,890	9	29	9.7	2,384.9	2,384.9	2,385.2	0.3
Q	15,734	11	31	9.3	2,408.0	2,408.0	2,408.6	0.6
R	16,685	34	34	8.5	2,443.0	2,443.0	2,443.6	0.6
S	18,005	11	31	9.1	2,498.7	2,498.7	2,499.2	0.5
T	18,797	14	33	8.7	2,521.3	2,521.3	2,521.7	0.4

[1]Stream Distance in Feet Above Confluence With Willow Springs Wash

TABLE 6

FEDERAL EMERGENCY MANAGEMENT AGENCY

MARICOPA COUNTY, AZ AND INCORPORATED AREAS

FLOODWAY DATA

WILLOW SPRINGS WASH TRIBUTARY 1

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Willow Springs Wash Tributary 1A								
A	422[1]	14	37	9.2	2,217.7	2,217.7	2,218.2	0.5
B	1,373[1]	13	36	9.5	2,241.6	2,241.6	2,241.7	0.1
C	2,323[1]	16	39	8.7	2,275.3	2,275.3	2,275.9	0.6
D	3,115[1]	16	39	8.8	2,377.1	2,377.1	2,377.6	0.5
E	4,013[1]	14	37	9.3	2,377.1	2,377.1	2,377.7	0.6
F	5,122[1]	12	37	9.1	2,491.8	2,491.8	2,492.0	0.2
Willow Springs Wash Tributary 2								
A	211[2]	43	143	10.4	2,215.9	2,215.9	2,215.9	0.0
B	1,056[2]	26	121	12.3	2,233.8	2,233.8	2,234.0	0.2
C	2,112[2]	36	135	11.0	2,255.6	2,255.6	2,255.7	0.1
D	3,485[2]	30	131	11.4	2,282.6	2,282.6	2,282.7	0.1
E	4,805[2]	49	109	8.2	2,316.4	2,316.4	2,316.8	0.4
F	5,914[2]	21	80	11.1	2,342.6	2,342.6	2,342.7	0.1
G	6,917[2]	28	58	7.7	2,379.2	2,379.2	2,379.2	0.0
H	7,867[2]	18	52	8.5	2,429.8	2,429.8	2,429.8	0.0
I	8,501[2]	30	58	7.7	2,469.4	2,469.4	2,469.4	0.0

[1]Stream Distance in Feet Above Confluence With Willow Springs Wash Tributary 1
[2]Stream Distance in Feet Above Confluence With Willow Springs Wash

TABLE 6

FEDERAL EMERGENCY MANAGEMENT AGENCY

MARICOPA COUNTY, AZ AND INCORPORATED AREAS

FLOODWAY DATA

WILLOW SPRINGS WASH TRIBUTARY 1A - WILLOW SPRINGS WASH TRIBUTARY 2

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Willow Springs Wash Tributary 2A								
A	528[1]	49	82	7.3	2,298.9	2,298.9	2,298.9	0.0
B	2,112[1]	29	68	8.8	2,343.4	2,343.4	2,343.4	0.0
C	2,746[1]	71	67	6.0	2,371.0	2,371.0	2,371.0	0.0
D	3,802[1]	23	50	8.1	2,403.9	2,403.9	2,403.9	0.0
E	5,280[1]	39	58	6.9	2,464.3	2,464.3	2,464.3	0.0
Willow Springs Wash Tributary 4								
A	634[2]	15	37	8.7	2,357.0	2,357.0	2,357.1	0.1
B	2,006[2]	16	37	8.7	2,406.6	2,406.6	2,406.6	0.0
C	3,062[2]	14	27	8.0	2,444.8	2,444.8	2,444.8	0.0
D	4,224[2]	22	32	6.9	2,495.0	2,495.0	2,495.0	0.0
E	5,755[2]	25	24	5.6	2,563.9	2,563.9	2,563.9	0.0

[1]Stream Distance in Feet Above Confluence With Willow Springs Wash Tributary 2

[2]Stream Distance in Feet Above Confluence With Willow Springs Wash

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Willow Springs Wash Tributary 5								
A	581[1]	29	74	8.5	2,066.3	2,066.3	2,066.3	0.0
B	1,584[1]	28	73	8.7	2,080.3	2,080.3	2,080.3	0.0
C	2,693[1]	44	91	6.9	2,095.2	2,095.2	2,095.2	0.0
D	3,643[1]	20	63	10.1	2,107.9	2,107.9	2,108.2	0.3
E	3,696[1]	14	181	3.5	2,119.6	2,119.6	2,119.6	0.0
F	4,224[1]	28	133	4.7	2,119.6	2,119.6	2,120.0	0.4
G	4,858[1]	57	54	5.5	2,128.6	2,128.6	2,128.6	0.0
H	6,178[1]	20	44	6.7	2,154.5	2,154.5	2,154.8	0.3
I	7,181[1]	42	48	6.1	2,173.7	2,173.7	2,173.7	0.0
J	8,290[1]	38	47	6.4	2,199.3	2,199.3	2,199.3	0.0
K	8,765[1]	26	41	7.3	2,209.6	2,209.6	2,209.6	0.0
L	9,662[1]	43	48	6.1	2,226.0	2,226.0	2,226.0	0.0
M	10,771[1]	14	34	8.8	2,253.1	2,253.1	2,253.1	0.0
Willow Springs Wash Tributary 5A								
A	686[2]	17	22	6.6	2,135.2	2,135.2	2,135.3	0.1
B	1,426[2]	12	20	7.4	2,154.7	2,154.7	2,154.8	0.1
C	2,323[2]	28	26	5.5	2,175.9	2,175.9	2,175.9	0.0
D	3,168[2]	21	24	6.1	2,195.8	2,195.8	2,195.8	0.0

[1]Stream Disance in Feet Above Confluence With Willow Springs Wash
[2]Stream Distanc in Feet Above Confluence With Willow Springs Wash Tributary 5

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Willow Springs Wash Tributary 6								
A	99[1]	30	141	8.4	2,157.0	2,157.0	2,157.6	0.6
B	601[1]	42	198	6.0	2,163.0	2,163.0	2,163.5	0.5
C	1,200[1]	38	164	7.2	2,173.6	2,173.6	2,174.0	0.4
D	1,591[1]	27	112	9.1	2,176.9	2,176.9	2,177.6	0.7
E	2,254[1]	53	194	5.2	2,184.5	2,184.5	2,185.1	0.6
F	2,841[1]	52	138	7.4	2,189.7	2,189.7	2,189.9	0.2
G	3,240[1]	57	154	3.9	2,195.0	2,195.0	2,195.6	0.6
H	4,040[1]	34	91	6.0	2,205.5	2,205.5	2,205.8	0.3
I	4,789[1]	30	95	5.8	2,217.6	2,217.6	2,218.0	0.4
J	5,640[1]	36	89	6.2	2,239.2	2,239.2	2,239.2	0.0
Willow Springs Wash Tributary 6A								
A	135[2]	37	44	1.4	2,197.7	2,197.7	2,198.2	0.5
B	699[2]	19	13	4.7	2,209.2	2,209.2	2,209.2	0.0
C	1,299[2]	29	15	4.1	2,232.7	2,232.7	2,232.7	0.0
Willow Springs Wash Tributary 6B								
A	214[2]	22	354	1.5	2,192.4	2,192.4	2,192.9	0.5
B	879[2]	20	83	0.6	2,207.8	2,207.8	2,208.0	0.2
C	1,500[2]	16	13	4.0	2,217.9	2,217.9	2,217.9	0.0
Willow Springs Wash Tributary 6C								
A	215[2]	13	16	4.8	2,175.8	2,175.8	2,176.0	0.2
B	751[2]	15	17	4.4	2,186.5	2,186.5	2,186.5	0.0
C	1,455[2]	10	18	4.3	2,201.3	2,201.3	2,201.7	0.4

[1]Stream Distance in Feet Above Confluence With Willow Springs Wash Tributary 1
[2]Stream Distance in Feet Above Confluence With Willow Springs Wash Tributary 6

TABLE 6

FEDERAL EMERGENCY MANAGEMENT AGENCY

MARICOPA COUNTY, AZ AND INCORPORATED AREAS

FLOODWAY DATA

WILLOW SPRINGS WASH TRIBUTARY 6 - WILLOW SPRINGS WASH TRIBUTARY 6A - WILLOW SPRINGS WASH TRIBUTARY 6B - WILLOW SPRINGS WASH TRIBUTARY 6C

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Wittmann Wash								
A	212	623	815	3.4	1,553.6	1,553.6	1,554.3	0.7
B	1,299	270	625	4.5	1,561.8	1,561.8	1,562.5	0.7
C	2,794	288	530	5.3	1,571.3	1,571.3	1,572.1	0.8
D	4,268	313	521	5.4	1,583.4	1,583.4	1,584.0	0.6
E	4,837	649	1,027	3	1,588.0	1,588.0	1,588.6	0.6
F	6,587	347	802	3.8	1,600.6	1,600.6	1,601.6	1.0
G	7,983	272	657	4.7	1,610.9	1,610.9	1,611.5	0.6
H	8,837	188	528	5.8	1,616.5	1,616.5	1,617.2	0.7
I	9,681	290	602	5.1	1,623.7	1,623.7	1,624.6	0.9
J	11,408	237	461	4.9	1,638.4	1,638.4	1,638.9	0.5
K	12,343	329	501	4.6	1,646.8	1,646.8	1,647.6	0.8
L	13,618	405	526	4.3	1,660.3	1,660.3	1,661.2	0.9
M	14,532	150	334	6.8	1,669.4	1,669.4	1,670.2	0.8
N	14,973	49	357	6.4	1,671.1	1,671.1	1,671.9	0.8
O	15,223	63	331	6.9	1,674.9	1,674.9	1,675.4	0.5
P	15,389	48	203	11.2	1,675.7	1,675.7	1,675.7	0.0
Q	15,483	108	653	3.5	1,678.1	1,678.1	1,678.5	0.4
R	15,866	114	654	3.5	1,679.6	1,679.6	1,680.2	0.6
S	16,275	111	517	4.4	1,683.5	1,683.5	1,684.1	0.6
T	17,274	40	120	5.3	1,687.7	1,687.7	1,687.7	0.0
U	17,527	309	496	4.3	1,690.6	1,690.6	1,690.7	0.1
V	17,596	662	1,215	1.8	1,692.8	1,692.8	1,692.8	0.0
W	17,823	85	225	9.5	1,693.8	1,693.8	1,693.7	0.1
X	20,394	159	314	6.8	1,719.9	1,719.9	1,720.2	0.3
Y	21,347	235	355	4.9	1,727.4	1,727.4	1,728.4	1.0
Z	24,118	135	163	6.1	1,754.3	1,754.3	1,754.8	0.5

[1]Stream Distance in Feet Above Confluence With Central Arizona Project Canal

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Wittmann Wash								
AA	25,565	156	241	2.9	1,772.1	1,772.1	1,772.9	0.8
AB	26,409	153	214	3.2	1,782.0	1,782.0	1,782.2	0.2
AC	28,885	106	134	4.8	1,808.6	1,808.6	1,809.1	0.5
AD	30,460	99	117	5.5	1,826.5	1,826.5	1,827.4	0.9

[1]Stream Distance in Feet Above Confluence With Central Arizona Project Canal

TABLE 6

FEDERAL EMERGENCY MANAGEMENT AGENCY

MARICOPA COUNTY, AZ AND INCORPORATED AREAS

FLOODWAY DATA

WITTMANN WASH

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Wittmann Wash North Split								
A	17,032	124	456	3.5	1,687.8	1,687.8	1,688.7	0.9
B	17,730	85	226	9.4	1,693.8	1,693.8	1,693.8	0.0

[1]Stream Distance in Feet Above Confluence With Central Arizona Project Canal

TABLE 6

FEDERAL EMERGENCY MANAGEMENT AGENCY

MARICOPA COUNTY, AZ AND INCORPORATED AREAS

FLOODWAY DATA

WITTMANN WASH NORTH SPLIT

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Wittmann Wash South Split								
A	84	204	214	2.0	1,550.7	1,550.7	1,550.7	0.0
B	477	111	85	5.0	1,555.9	1,555.9	1,556.3	0.4
C	1,468	122	103	4.1	1,564.2	1,564.2	1,564.5	0.3
D	1,732	141	205	2.1	1,566.1	1,566.1	1,566.7	0.6
E	2,418	204	229	1.8	1,572.1	1,572.1	1,572.2	0.1
F	3,607	116	131	3.2	1,581.7	1,581.7	1,582.6	0.9
G	3,934	222	246	1.7	1,585.5	1,585.5	1,585.7	0.2
H	4,298	440	747	4.1	1,588.2	1,588.2	1,588.9	0.7

[1]Stream Distance in Feet Above Confluence With Central Arizona Project Canal

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Wittmann Wash Tributary								
A	1,240	107	92	5.0	1,714.2	1,714.2	1,714.5	0.3
B	2,092	99	102	4.5	1,722.7	1,722.7	1,723.6	0.9
C	2,470	119	132	3.5	1,727.1	1,727.1	1,727.9	0.8
D	2,923	82	104	4.4	1,731.8	1,731.8	1,732.3	0.5
E	3,677	39	80	5.7	1,740.2	1,740.2	1,741.2	1.0
F	4,163	53	95	4.8	1,746.4	1,746.4	1,747.1	0.7
G	7,356	74	106	4.3	1,777.5	1,777.5	1,777.8	0.3
H	8,599	45	89	3.9	1,791.1	1,791.1	1,791.6	0.5
I	8,926	87	96	3.6	1,793.9	1,793.9	1,794.2	0.3
J	11,091	107	79	4.4	1,816.9	1,816.9	1,817.1	0.2
K	11,535	190	228	4.4	1,823.5	1,823.5	1,823.9	0.4

[1]Stream Distance in Feet Above Confluence With Wittmann Wash

TABLE 6

FEDERAL EMERGENCY MANAGEMENT AGENCY

MARICOPA COUNTY, AZ AND INCORPORATED AREAS

FLOODWAY DATA

WITTMANN WASH TRIBUTARY

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE[1]	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
					(FEET NAVD)			
Yucca Flat Wash								
A	550	549	844	8.2	2,318.0	2,318.0	2,318.0	0.0
B	2,090	379	849	6.1	2,338.6	2,338.6	2,339.1	0.5
C	3,710	213	684	7.5	2,361.2	2,361.2	2,361.4	0.2
D	5,160	158	585	8.8	2,378.0	2,378.0	2,378.0	0.0
E	6,570	129	549	9.4	2,392.8	2,392.8	2,392.8	0.0
F	8,220	144	542	9.5	2,409.3	2,409.3	2,409.4	0.1
G	9,575	328	431	4.8	2,422.8	2,422.8	2,422.8	0.0
H	11,065	215	385	5.4	2,439.3	2,439.3	2,439.8	0.5
I	12,615	199	376	5.5	2,458.9	2,458.9	2,458.9	0.0
J	13,555	278	350	5.9	2,469.8	2,469.8	2,469.8	0.0
K	14,605	279	403	5.2	2,482.8	2,482.8	2,482.8	0.0
L	15,685	331	408	5.1	2,499.2	2,499.2	2,499.2	0.0

[1]Stream Distance in Feet Above Confluence With Flying E Wash