BRADY LAND SURVEYING CO.
1042 E. GUADALUPE ROAD, SUITE 100
TEMPE, ARIZONA 85283

Property of
Flood Control District of
Please Return
2801 W. Durango
Phoenix, AZ 85009

TOPOGRAPHICAL SURVEY AND QUANTITATIVE CALCULATIONS OF DISPOSAL SITE BETWEEN CHANDLER HEIGHTS ROAD AND RIGGS ROAD

A022 903

BRADY ENGINEERING & LAND SURVEYING CO.
Civil Engineering • Structural Engineering
Land Surveying • Construction Staking

Dennis H. Brady L.S.
Robert N. Hermon P.E.
Gerald H. Nelson P.E.
Lee L. Schoon P.E.

FLOOD CONTROL DISTRICT
RECEIVED
JAN 19 '87

	CH ENG		P & PM
	DEP		HYDRO
	ADMIN		LMGT
	FINANCE		FILE
	C & O		
	ENGR		

REMARKS

15 January 1987

Mr. Leonard Eddy
FLOOD CONTROL DISTRICT OF MARICOPA COUNTY
3335 West Durango Street
Phoenix, Arizona 85009

RE: TOPOGRAPHICAL SURVEY AND QUANTITATIVE CALCULATIONS OF DISPOSAL SITE BETWEEN CHANDLER HEIGHTS ROAD AND RIGGS ROAD.

Gentlemen:

Per your request a topographical cross-section survey was accomplished at the above referenced location during the week of 1-6-87. A new Bench Circuit was established using an existing Maricopa County Engineering Benchmark located at the Northeast corner of the Bridge at Chandler Heights Road, Elevation = 1310.66. No other previous established benchmarks were found. The baseline for our cross-sections is located 550.00 feet East of the West line of Section 27, Township 2 South, Range 6 East of the Gila and Salt River Base and Meridian, Maricopa County, Arizona, and its intersection with the centerline of Chandler Heights Road was taken as station 0 + 00(stations advancing Southward).

The enclosed computer cross-sections reflect the present topographical condition at 81 stations, from station 1+00 to station 52 + 25. The cross-sections at 1 + 50 thru 24 + 50 have an additional horizontal line representing a +6 feet elevation increase correlated from original ground grade. The "Volume Cut" (CY) indicates the necessity of 53,951.4 cubic yards removal to lower the disposal mound to the stipulated +6 feet maximum elevation.

If you have any questions or need additional information, please call the undersigned.

Sincerely,

BRADY ENGINEERING & LAND SURVEYING CO.

Robert N. Hermon, P.E. 5277 — Joe Placone, Project Manager

Registered Professional Engineer (Civil) CERTIFICATE NO. 5277 ROBERT N. HERMON Date Signed ARIZONA, U.S.A.

RHN:wm
Enc.

1042 East Guadalupe Road • Tempe, Arizona 85283 • 602-839-4000

BASELINE STATIONS	CATCH POINT LT OFFSET / ELEV	SLOPE RATIO	BSELN ELEV.	SLOPE RATIO	CATCH POINT RT OFFSET / ELEV	ENDAREA CUT(SF)	ENDAREA FILL(SF)	VOLUME CUT(CY)	VOLUME FILL(CY)	COMPACT FILL(CY)	MASS NET(CY)
								-1391.7	327.0	327.0	-12812.9
15+00.00	-109.00 / 1300.84	0.0	1306.65	0.0	150.00 / 1300.39	-735.83	176.40				
								-1477.2	413.0	413.0	-13877.2
15+50.00	-131.00 / 1299.79	0.0	1305.98	0.0	150.00 / 1300.19	-859.59	269.62				
								-1553.7	509.4	509.4	-14921.5
16+00.00	-130.00 / 1300.09	0.0	1306.14	0.0	150.00 / 1300.19	-818.44	280.56				
								-1557.1	495.8	495.8	-15982.7
16+50.00	-130.00 / 1299.59	0.0	1305.78	0.0	150.00 / 1299.99	-863.22	254.92				
								-1553.0	486.4	486.4	-17049.3
17+00.00	-129.00 / 1300.29	0.0	1306.11	0.0	150.00 / 1299.89	-813.99	270.39				
								-1533.4	445.0	445.0	-18137.7
17+50.00	-118.00 / 1300.38	0.0	1306.12	0.0	150.00 / 1299.78	-842.08	210.21				
								-1634.7	409.6	409.6	-19362.8
18+00.00	-125.00 / 1299.28	0.0	1305.55	0.0	150.00 / 1299.88	-923.41	232.16				
								-1673.4	434.6	434.6	-20601.7
18+50.00	-126.00 / 1299.13	0.0	1305.59	0.0	150.00 / 1300.13	-883.91	237.18				
								-1602.4	452.5	452.5	-21751.6
19+00.00	-125.00 / 1299.28	0.0	1305.64	0.0	150.00 / 1300.08	-846.67	251.47				
								-1587.0	464.1	464.1	-22874.5
19+50.00	-125.00 / 1299.28	0.0	1305.53	0.0	150.00 / 1299.83	-867.33	249.78				
								-1568.0	469.9	469.9	-23972.7
20+00.00	-126.00 / 1299.28	0.0	1305.58	0.0	150.00 / 1299.93	-826.06	257.66				
								-1527.1	480.1	480.1	-25019.7
20+50.00	-128.00 / 1299.43	0.0	1305.61	0.0	150.00 / 1299.83	-823.25	260.82				
								-1491.6	496.8	496.8	-26014.5
21+00.00	-128.00 / 1299.53	0.0	1305.62	0.0	150.00 / 1299.73	-787.70	275.70				
								-1479.6	506.6	506.6	-26987.5
21+50.00	-127.00 / 1299.33	0.0	1305.56	0.0	150.00 / 1299.83	-810.23	271.45				
								-1403.8	525.3	525.3	-27866.0
22+00.00	-126.00 / 1299.33	0.0	1305.88	0.0	150.00 / 1300.53	-705.84	295.84				
								-1214.9	570.3	570.3	-28510.6
22+50.00	-127.00 / 1299.63	0.0	1306.13	0.0	150.00 / 1300.73	-606.29	320.09				
								-1192.3	558.8	558.8	-29144.2
23+00.00	-126.00 / 1299.43	0.0	1305.86	0.0	150.00 / 1300.38	-681.43	283.41				
								-1046.9	495.0	495.0	-29696.0
23+50.00	-113.00 / 1300.63	0.0	1306.61	0.0	150.00 / 1300.58	-449.17	251.22				
								-506.1	508.9	508.9	-29693.3
24+00.00	-116.00 / 1300.63	0.0	1306.61	0.0	150.00 / 1300.58	-97.46	298.34				
								-90.2	1003.5	1003.5	-28780.1
24+50.00	-120.00 / 1299.73	0.0	1306.17	0.0	150.00 / 1300.73	0.00	785.40				
								-53951.4	25171.3	25171.3	-28780.1

Compaction Ratio = 1

BASELINE STATIONS	CATCH POINT LT OFFSET / ELEV	SLOPE RATIO	BSELN ELEV.	SLOPE RATIO	CATCH POINT RT OFFSET / ELEV	ENDAREA CUT(SF)	ENDAREA FILL(SF)	VOLUME CUT(CY)	VOLUME FILL(CY)	COMPACT FILL(CY)	MASS NET(CY)
								0.0	0.0	0.0	0.0
1+50.00	-150.00 / 1300.80	0.0	1306.88	0.0	50.00 / 1300.90	0.00	494.51				
								-6.0	943.8	943.8	937.8
2+00.00	-150.00 / 1300.55	0.0	1306.09	0.0	93.50 / 1299.80	-6.48	524.78				
								-15.9	828.6	828.6	1750.6
2+50.00	-127.00 / 1300.85	0.0	1306.49	0.0	100.00 / 1300.20	-10.64	370.14				
								-15.2	755.4	755.4	2490.7
3+00.00	-150.00 / 1300.80	0.0	1306.59	0.0	100.00 / 1300.45	-5.80	445.69				
								-182.8	653.2	653.2	2961.1
3+50.00	-129.00 / 1300.95	0.0	1306.75	0.0	97.00 / 1300.60	-191.60	259.75				
								-515.2	656.5	656.5	3102.4
4+00.00	-129.00 / 1300.90	0.0	1306.44	0.0	150.00 / 1299.90	-364.86	449.31				
								-719.7	820.1	820.1	3202.9
4+50.00	-129.00 / 1301.05	0.0	1306.66	0.0	150.00 / 1300.20	-412.41	436.41				
								-820.7	786.6	786.6	3168.8
5+00.00	-128.00 / 1301.00	0.0	1306.72	0.0	150.00 / 1300.40	-473.94	413.14				
								-995.6	726.9	726.9	2900.2
5+50.00	-128.00 / 1300.75	0.0	1306.47	0.0	150.00 / 1300.15	-601.26	371.94				
								-1147.2	677.7	677.7	2430.6
6+00.00	-129.00 / 1300.95	0.0	1306.51	0.0	150.00 / 1300.00	-637.76	360.01				
								-1187.7	629.8	629.8	1872.8
6+50.00	-128.00 / 1301.00	0.0	1306.59	0.0	150.00 / 1300.10	-644.97	320.22				
								-1193.4	608.0	608.0	1287.4
7+00.00	-130.00 / 1301.05	0.0	1306.79	0.0	150.00 / 1300.50	-643.90	336.45				
								-1159.3	596.3	596.3	724.3
7+50.00	-130.00 / 1300.90	0.0	1306.97	0.0	150.00 / 1301.05	-608.16	307.51				
								-1182.3	552.7	552.7	94.8
8+00.00	-129.00 / 1300.95	0.0	1306.88	0.0	150.00 / 1300.80	-668.74	289.44				
								-1263.5	506.0	506.0	-662.8
8+50.00	-128.00 / 1301.05	0.0	1306.84	0.0	150.00 / 1300.60	-695.89	257.04				
								-1295.7	478.3	478.3	-1480.2
9+00.00	-129.00 / 1300.80	0.0	1306.82	0.0	150.00 / 1300.85	-703.45	259.52				
								-1351.6	474.3	474.3	-2357.5
9+50.00	-129.00 / 1300.54	0.0	1306.61	0.0	150.00 / 1300.69	-756.29	252.69				
								-1426.8	467.2	467.2	-3317.0
10+00.00	-130.00 / 1300.49	0.0	1306.58	0.0	150.00 / 1300.69	-784.61	251.91				
								-1433.6	433.4	433.4	-4317.2
10+50.00	-123.00 / 1300.64	0.0	1306.73	0.0	150.00 / 1300.84	-763.65	216.17				
								-1386.2	442.3	442.3	-5261.1
11+00.00	-130.00 / 1300.89	0.0	1306.84	0.0	150.00 / 1300.79	-733.48	261.55				
								-1403.5	467.4	467.4	-6197.2
11+50.00	-129.00 / 1300.49	0.0	1306.54	0.0	150.00 / 1300.59	-782.32	243.22				
								-1400.5	421.3	421.3	-7176.4
12+00.00	-123.00 / 1300.74	0.0	1306.76	0.0	150.00 / 1300.79	-730.20	211.78				
								-1352.6	412.1	412.1	-8116.9
12+50.00	-128.00 / 1300.59	0.0	1306.73	0.0	150.00 / 1300.89	-730.64	233.31				
								-1344.3	443.3	443.3	-9017.9
13+00.00	-128.00 / 1300.39	0.0	1306.76	0.0	150.00 / 1301.19	-721.20	245.48				
								-1369.3	448.1	448.1	-9939.1
13+50.00	-129.00 / 1300.24	0.0	1306.56	0.0	150.00 / 1300.94	-757.64	238.44				
								-1344.8	473.2	473.2	-10810.7
14+00.00	-129.00 / 1300.39	0.0	1306.83	0.0	150.00 / 1301.34	-694.70	272.65				
								-1353.6	416.1	416.1	-11748.2
14+50.00	-111.00 / 1300.39	0.0	1306.45	0.0	150.00 / 1300.54	-767.23	176.75				

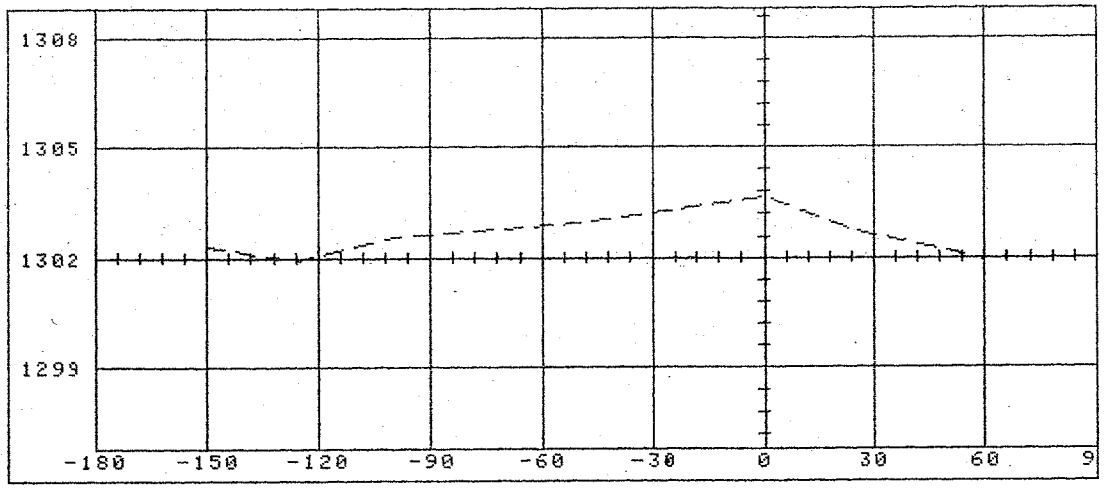

1+00.00

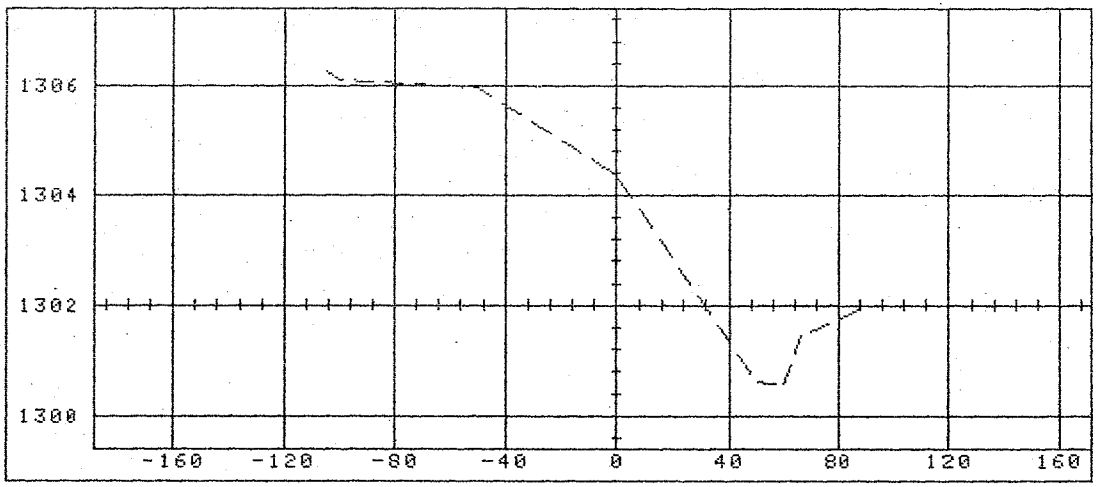

1+25.00

1+50.00

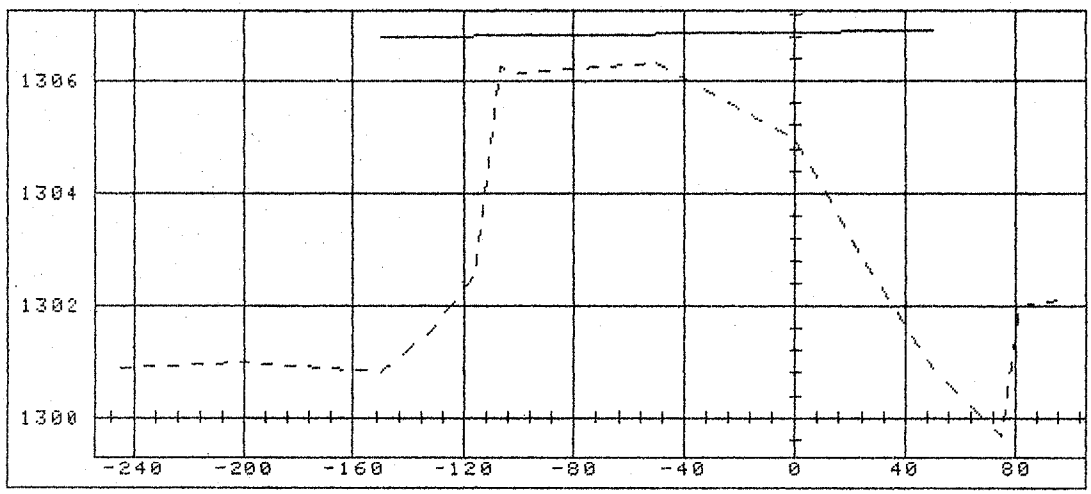

2+00.00

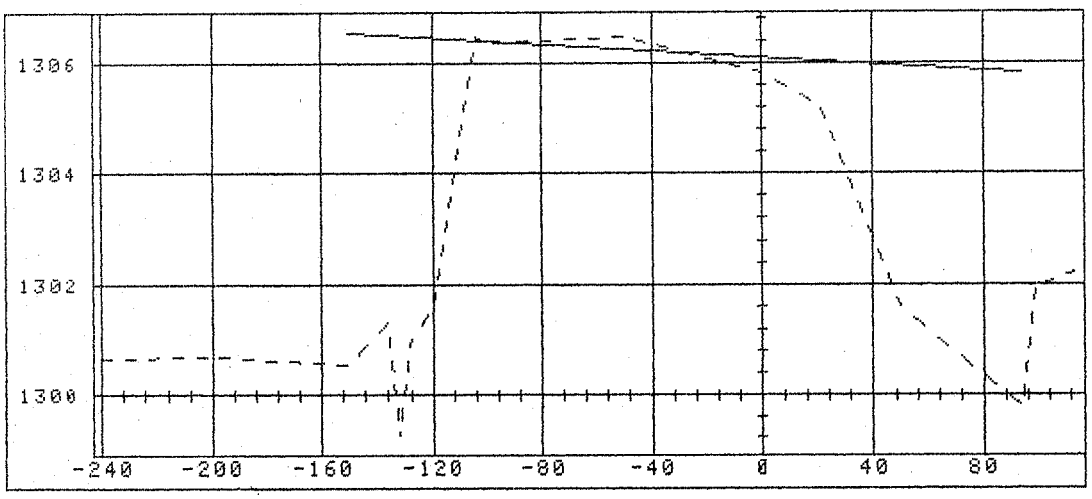

2+50.00

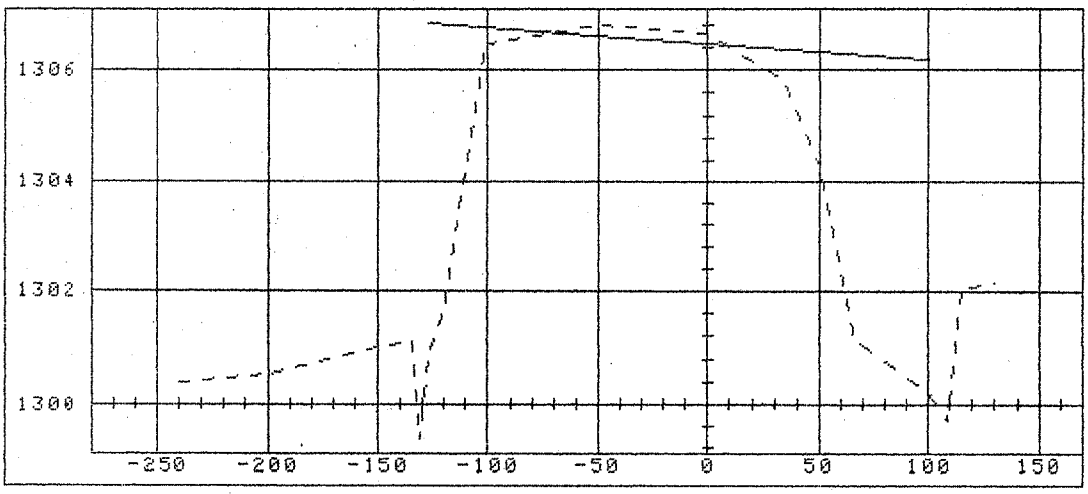

3+00.00

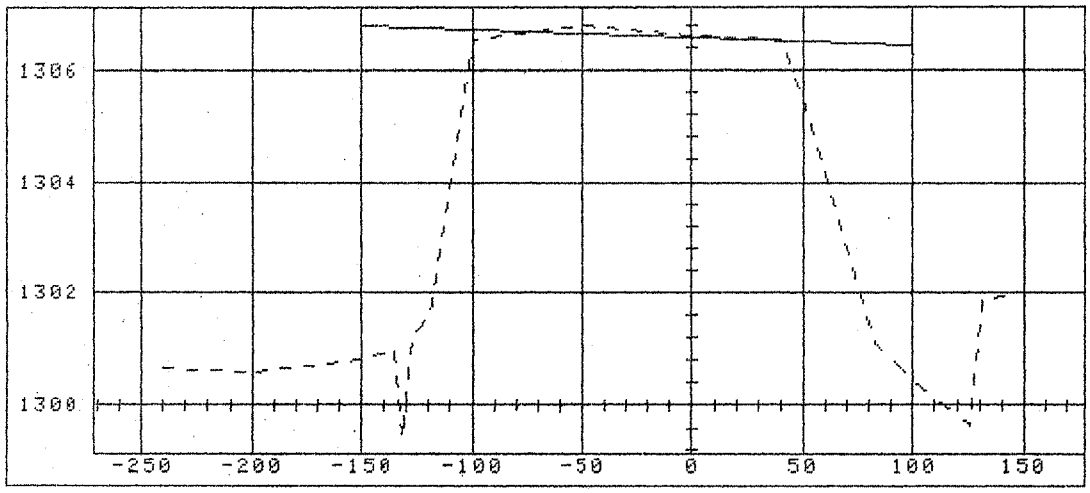

3+50.00

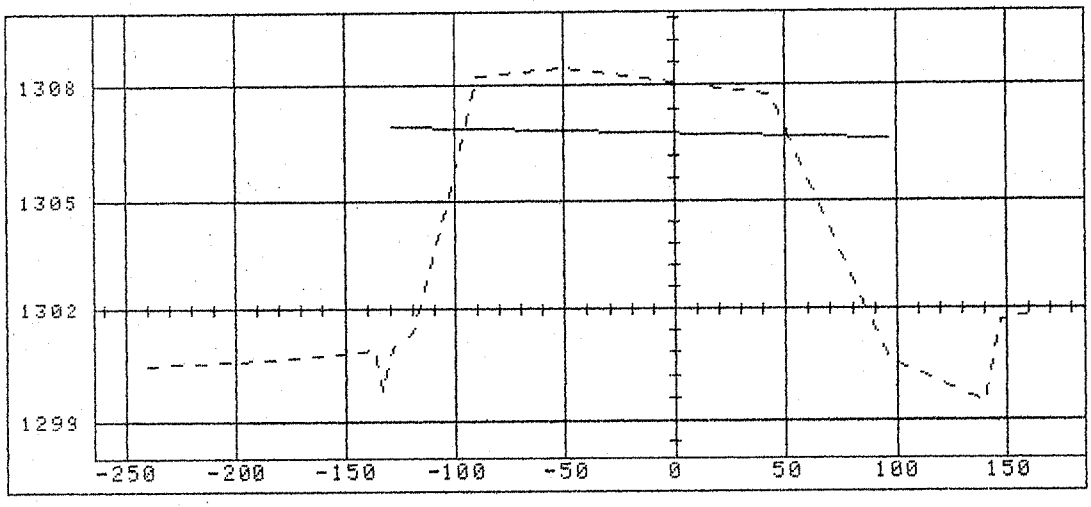

4+00.00

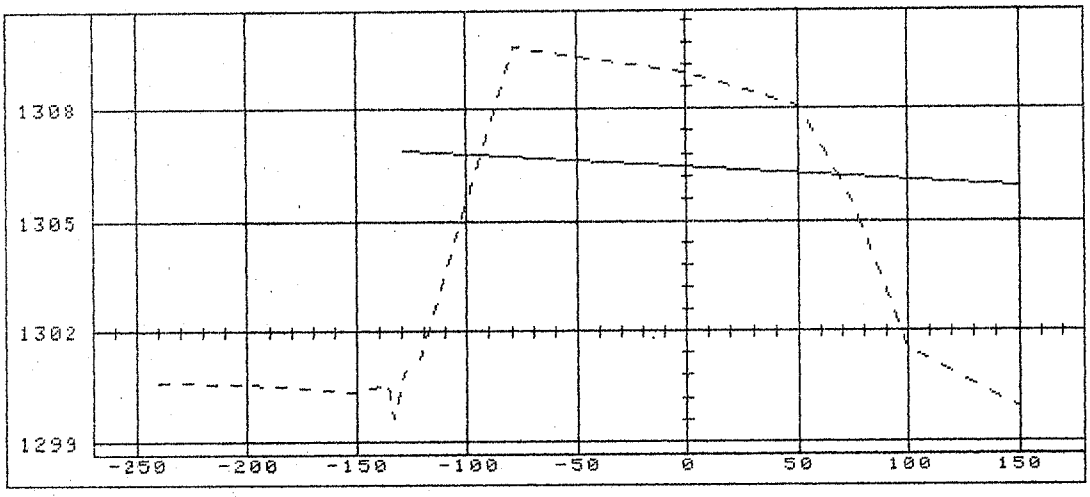

4+50.00

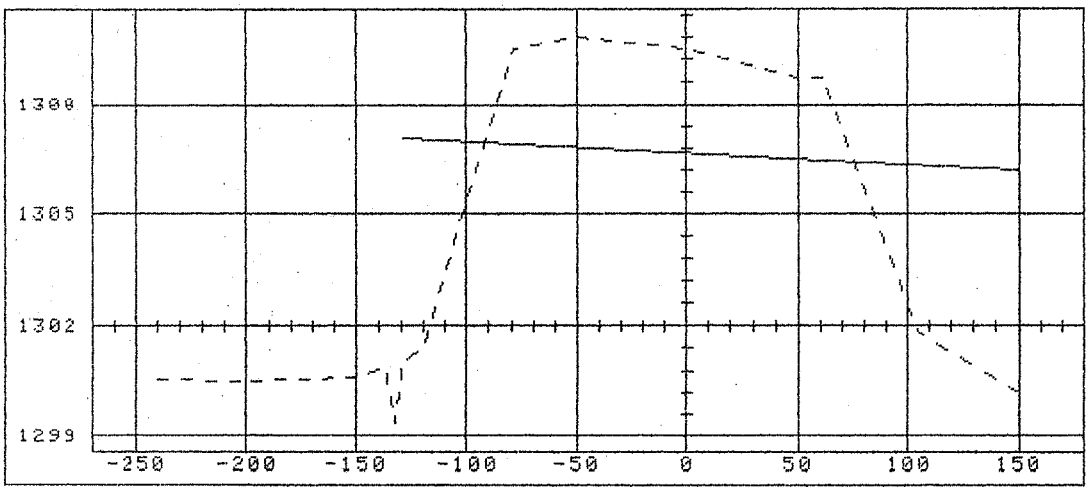

5+00.00

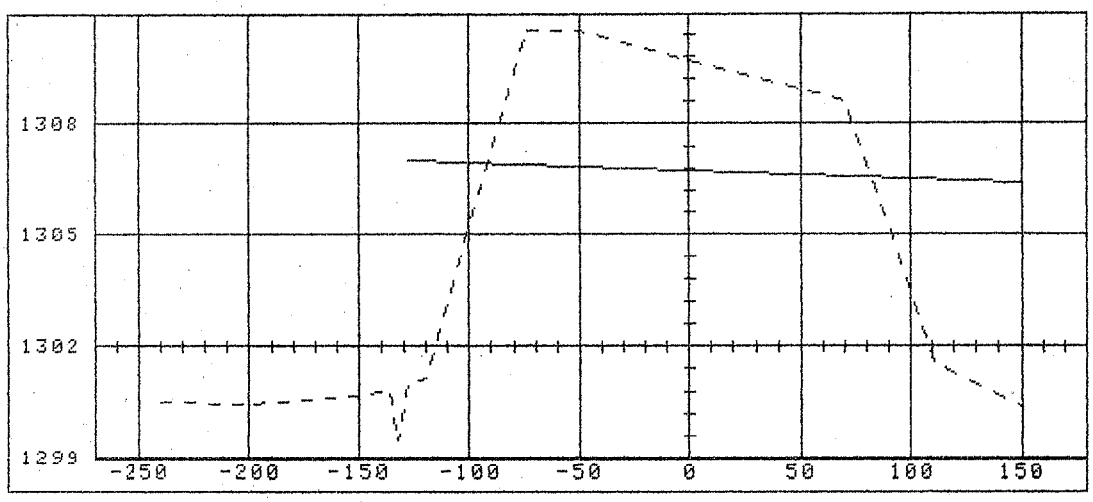

5+50.00

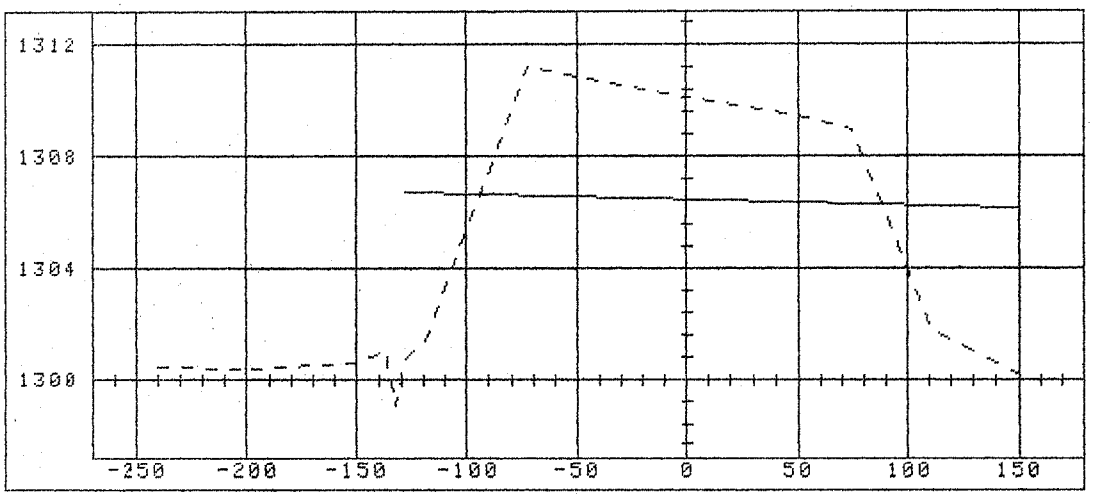

6+00.00

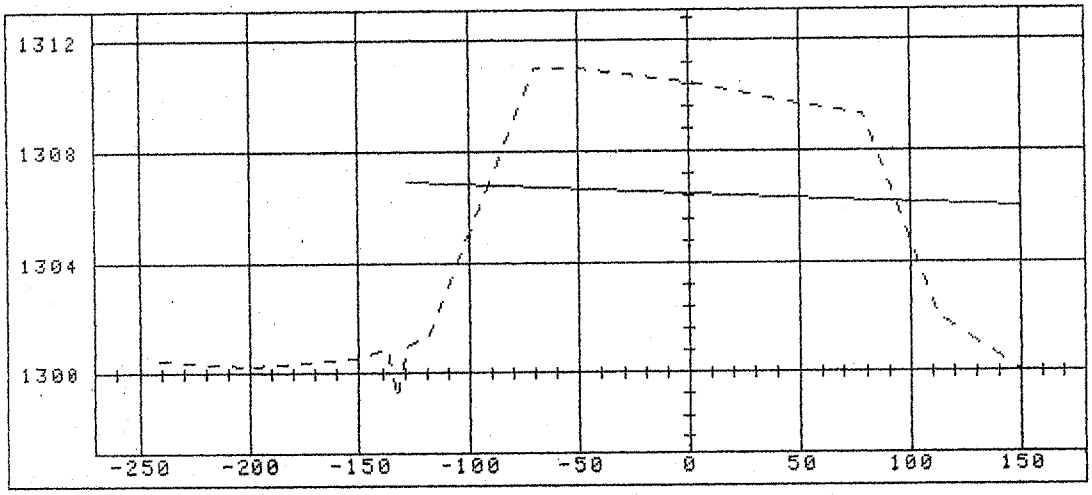

6+50.00

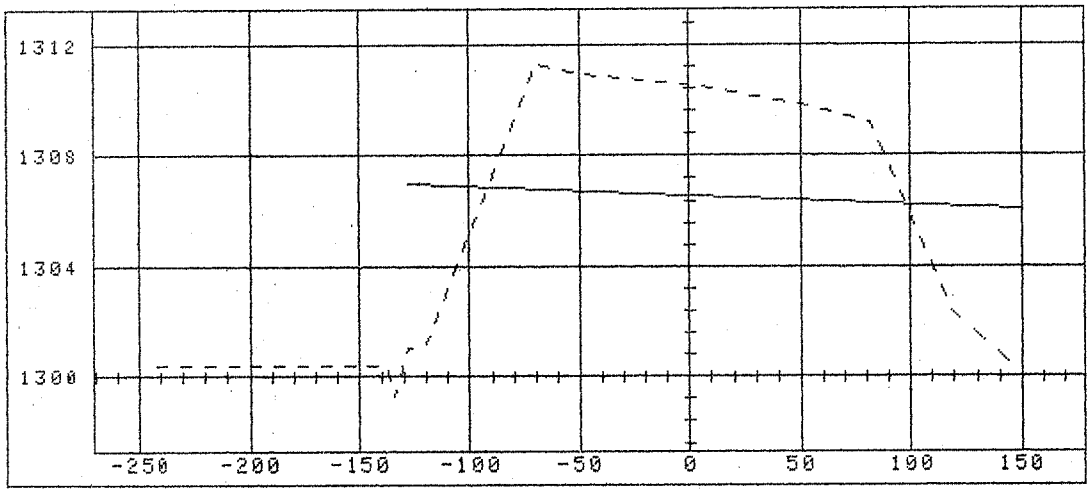

7+00.00

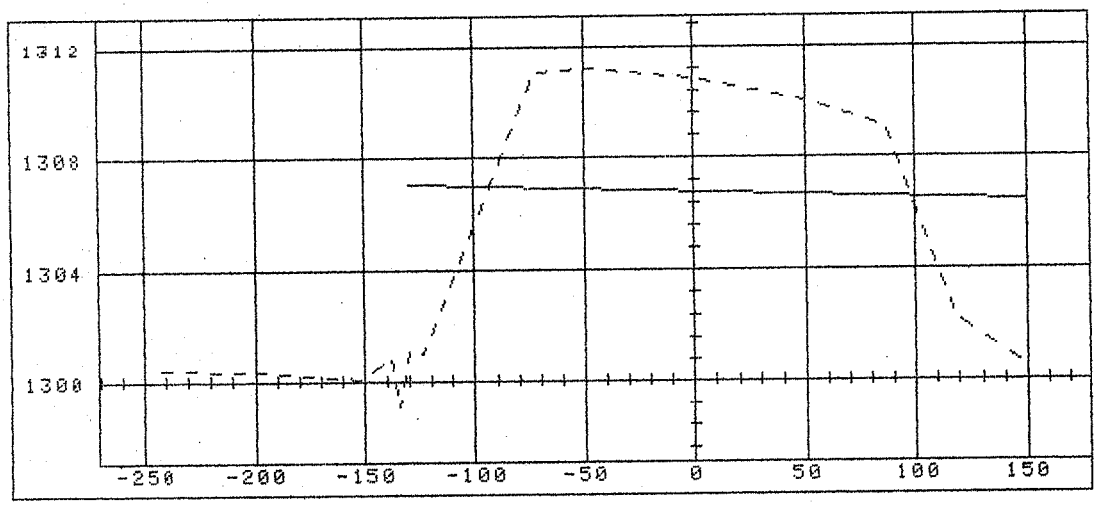

7+50.00

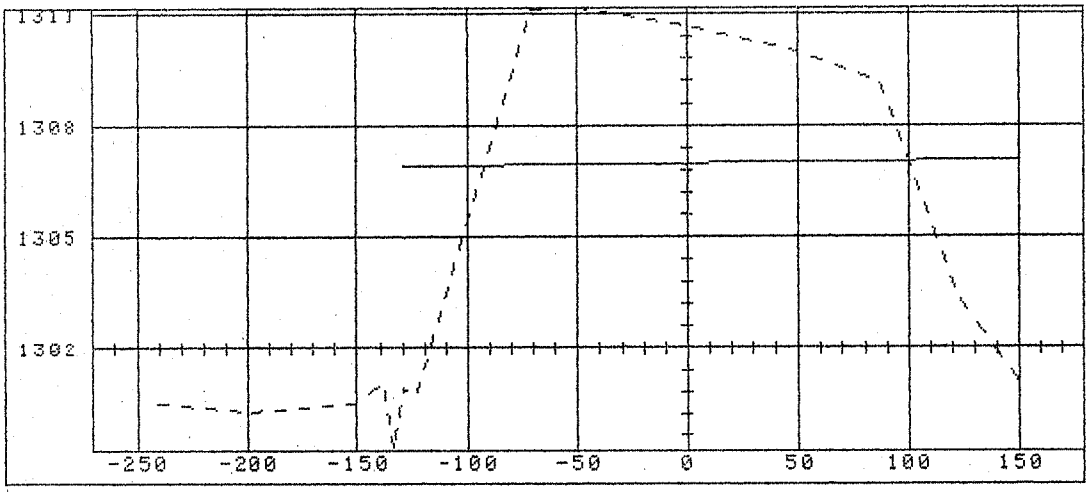

8+00.00

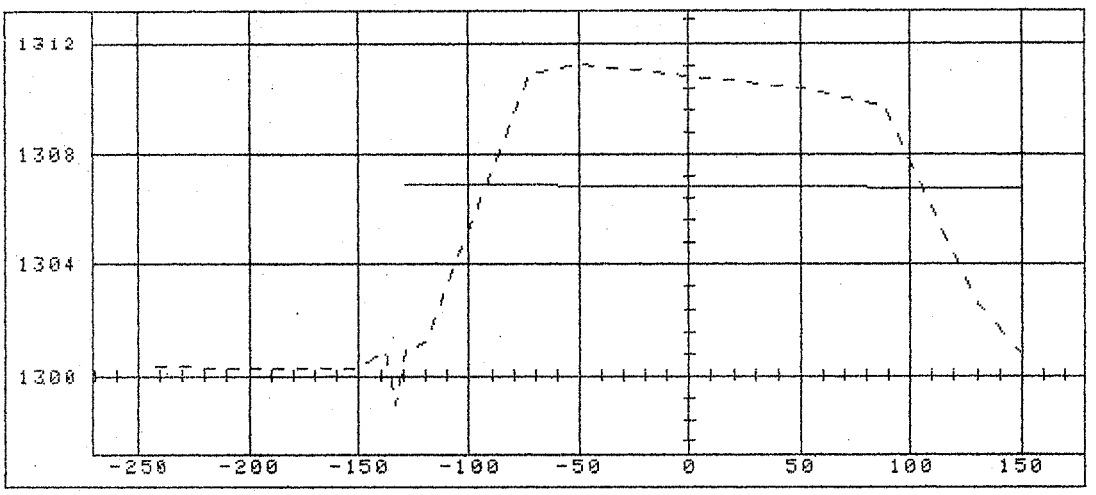

8+50.00

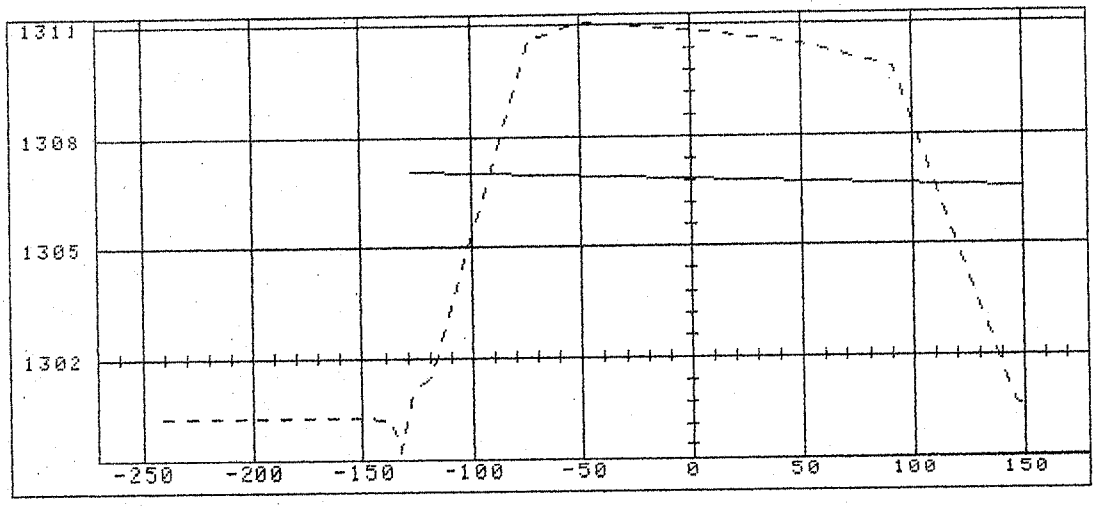

9+00.00

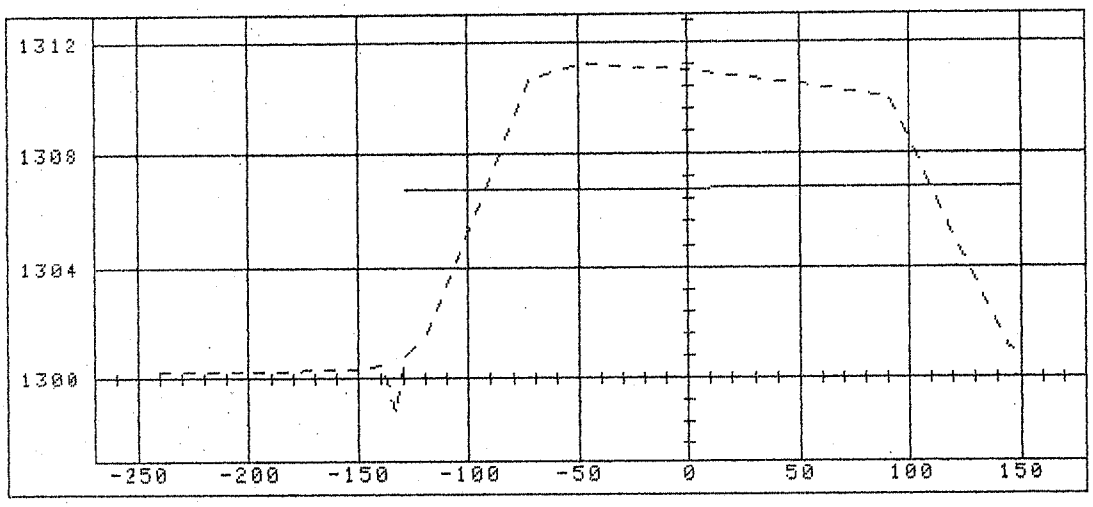

9+50.00

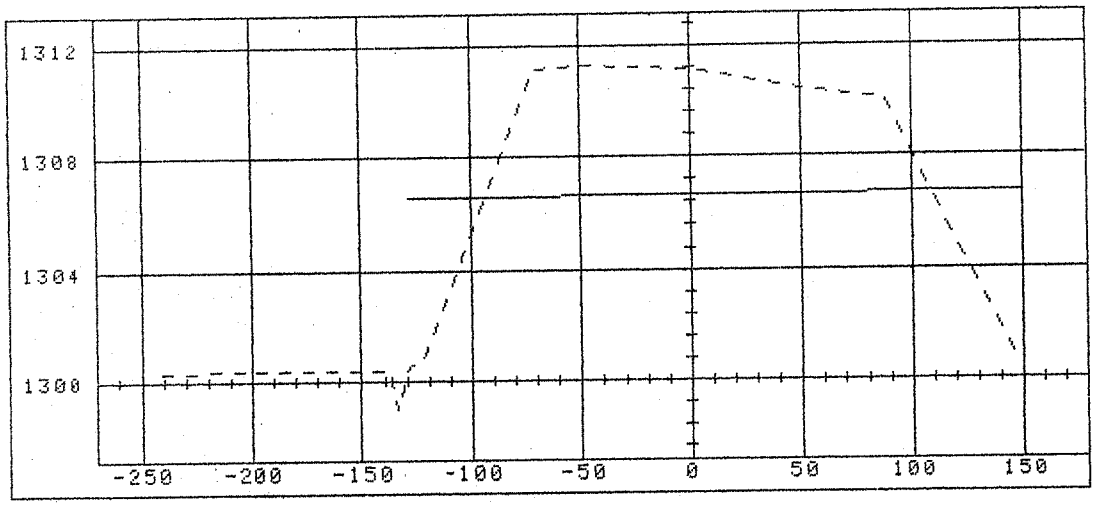

10+00.00

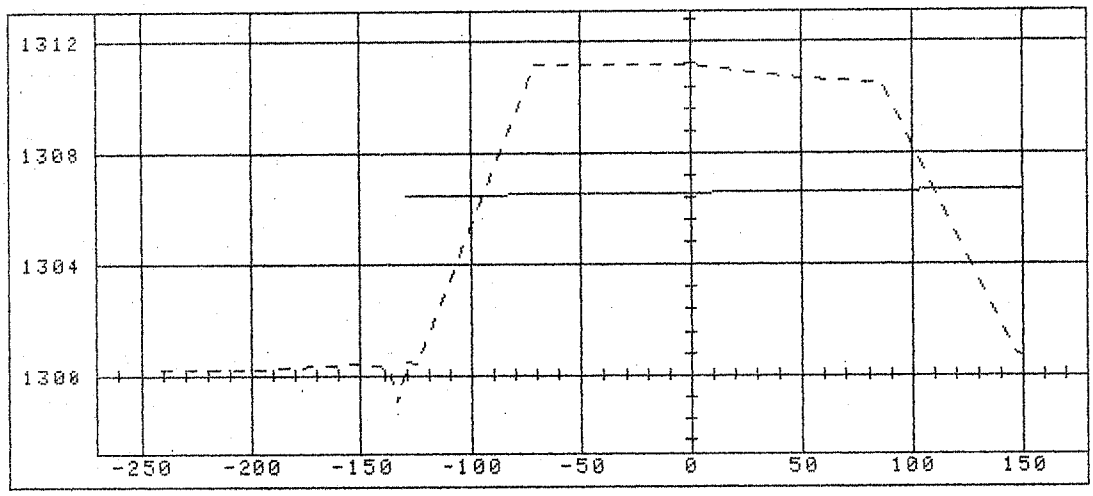

10+50.00

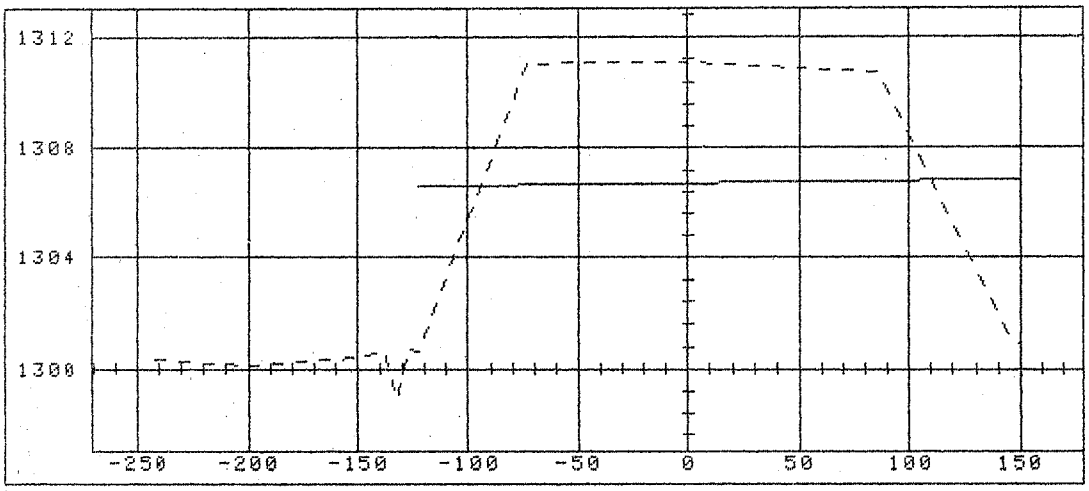

11+00.00

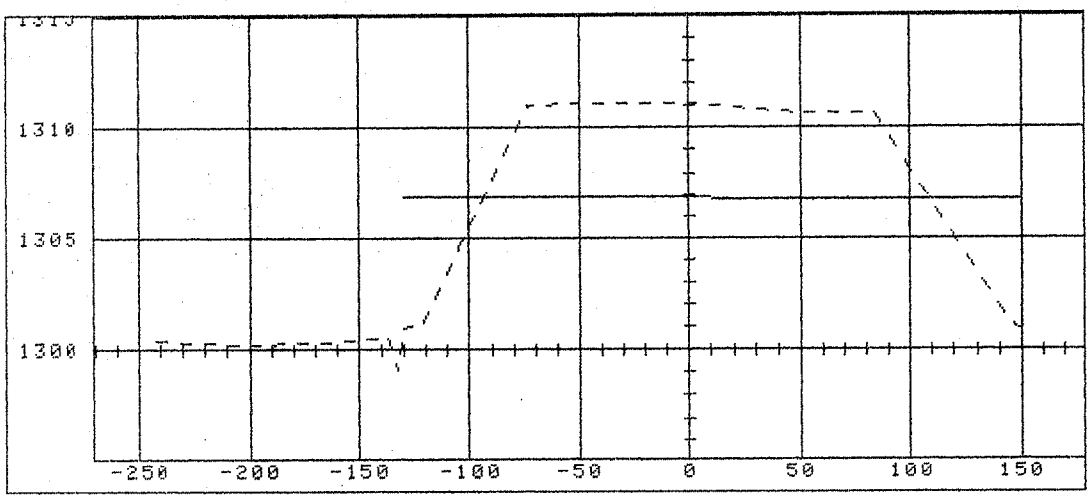

11+50.00

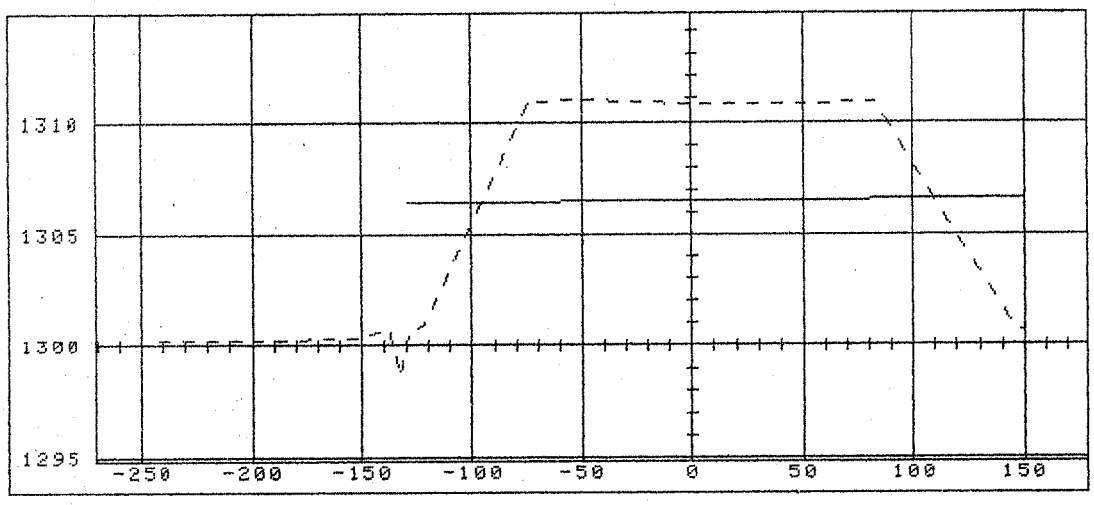

12+00.00

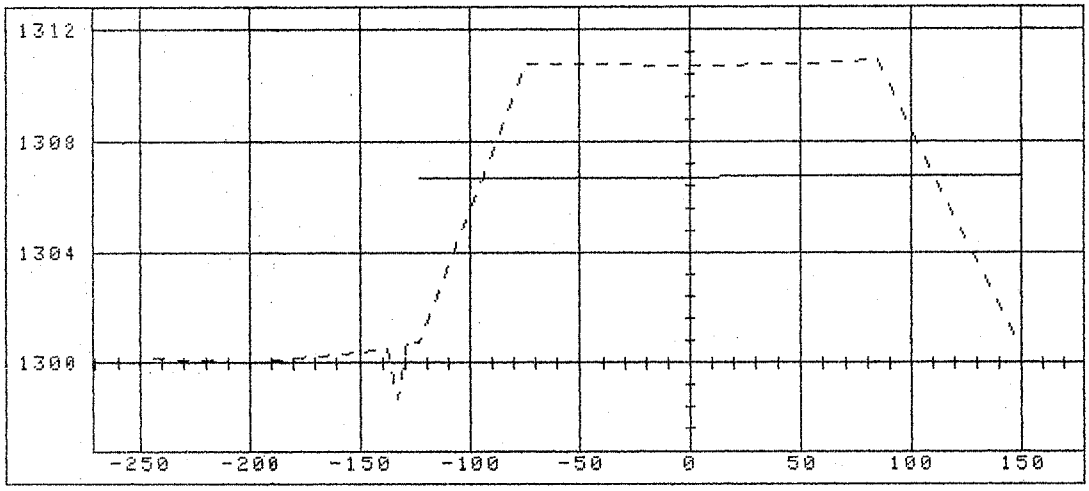

12+50.00

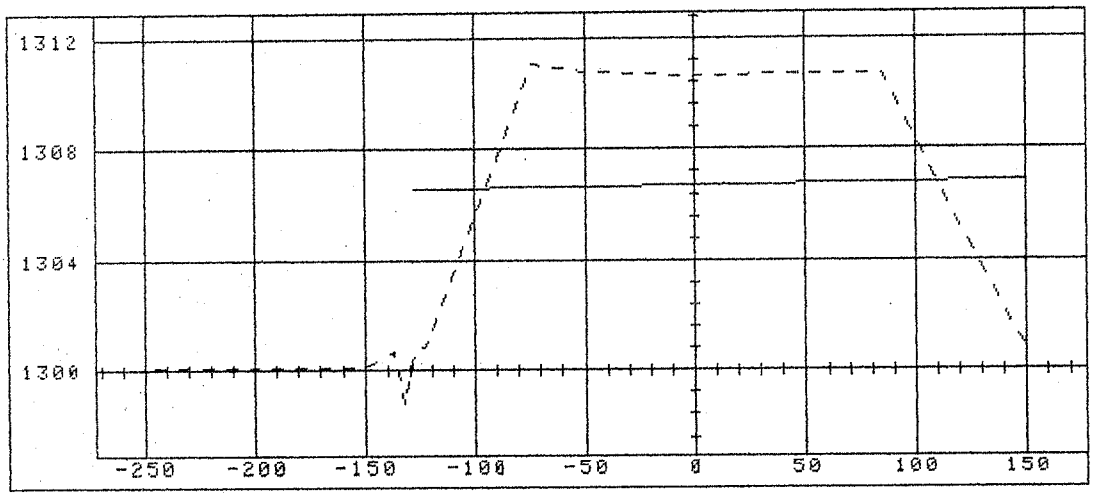

13+00.00

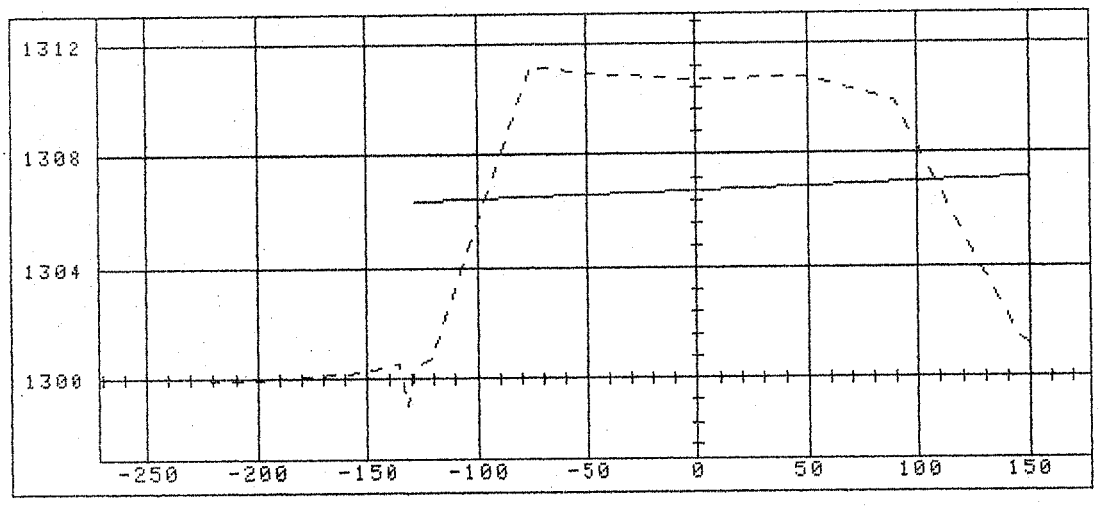

13+50.00

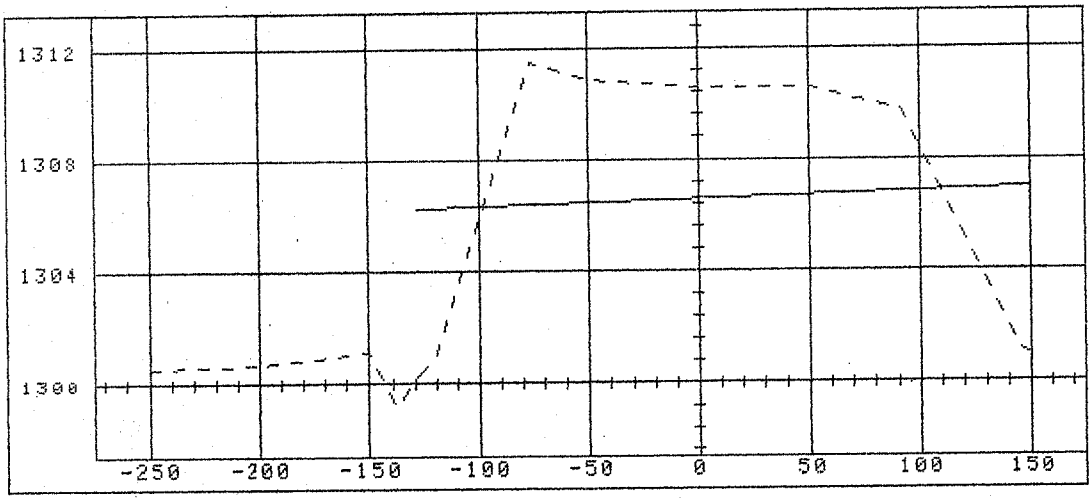

14+00.00

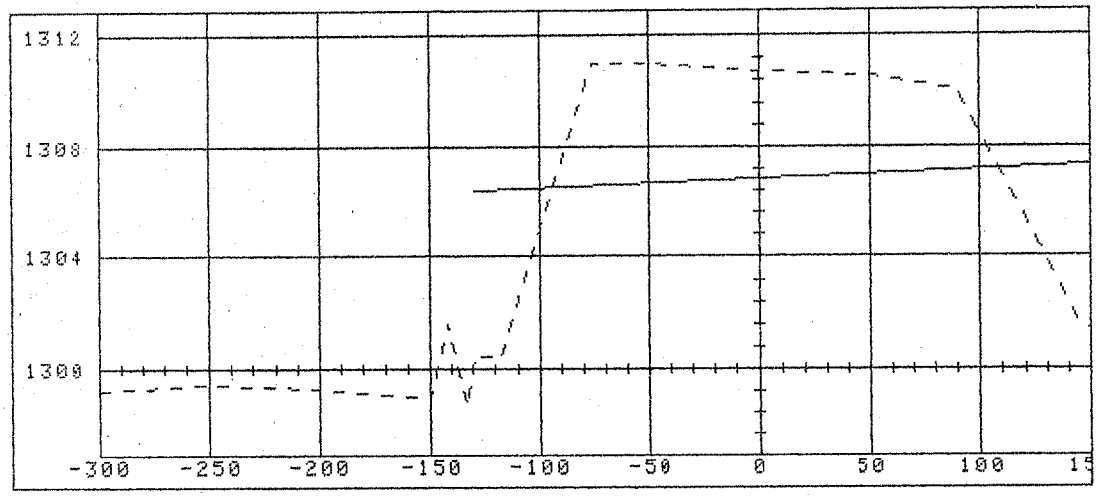

14+50.00

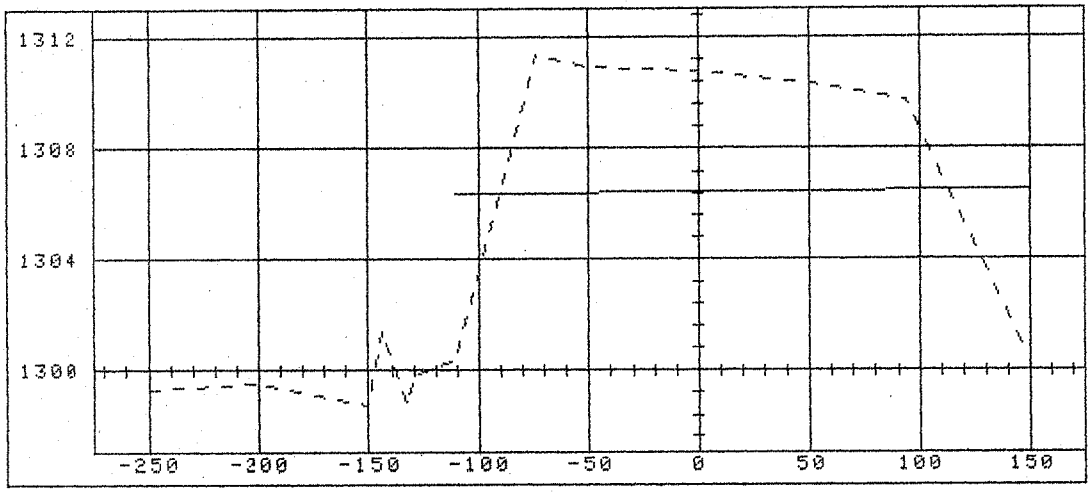

15+00.00

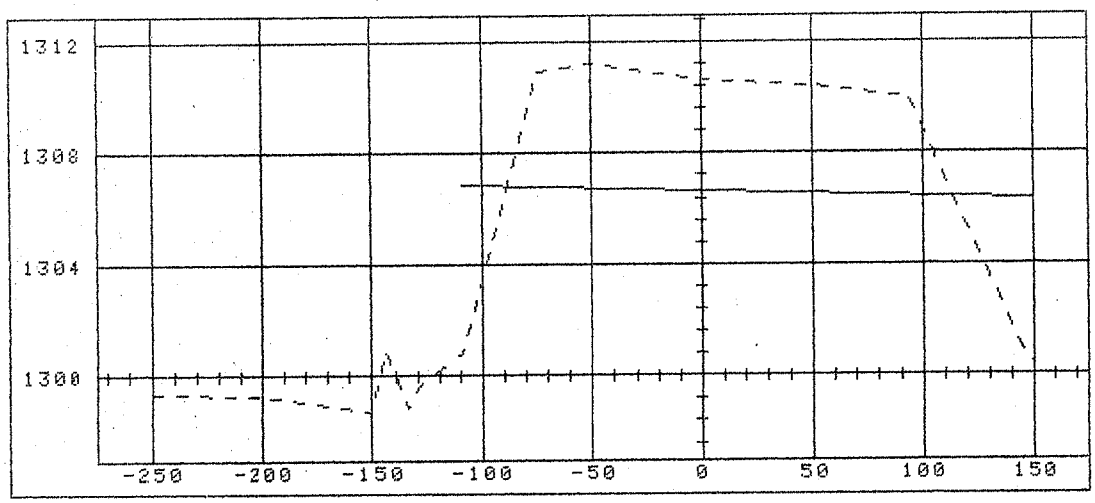

15+50.00

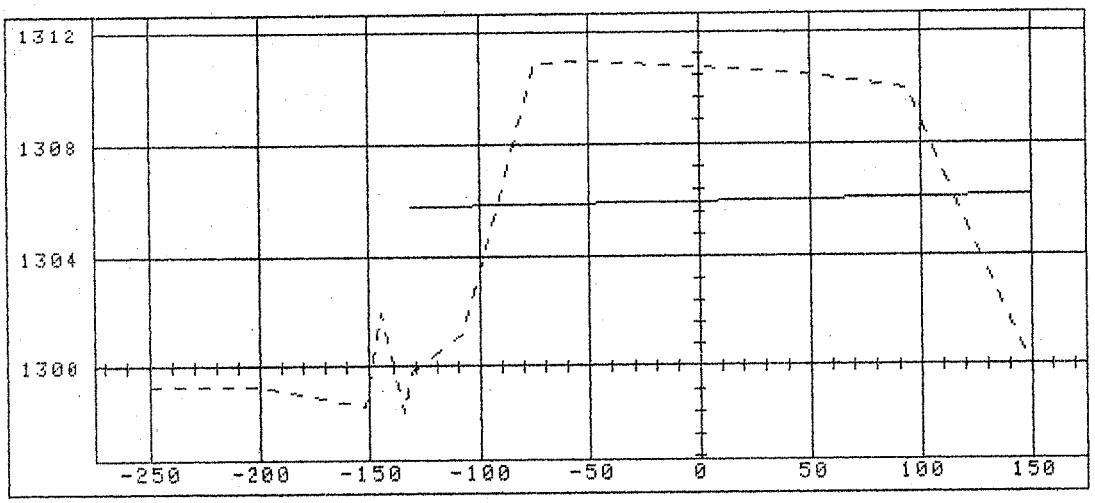

16+00.00

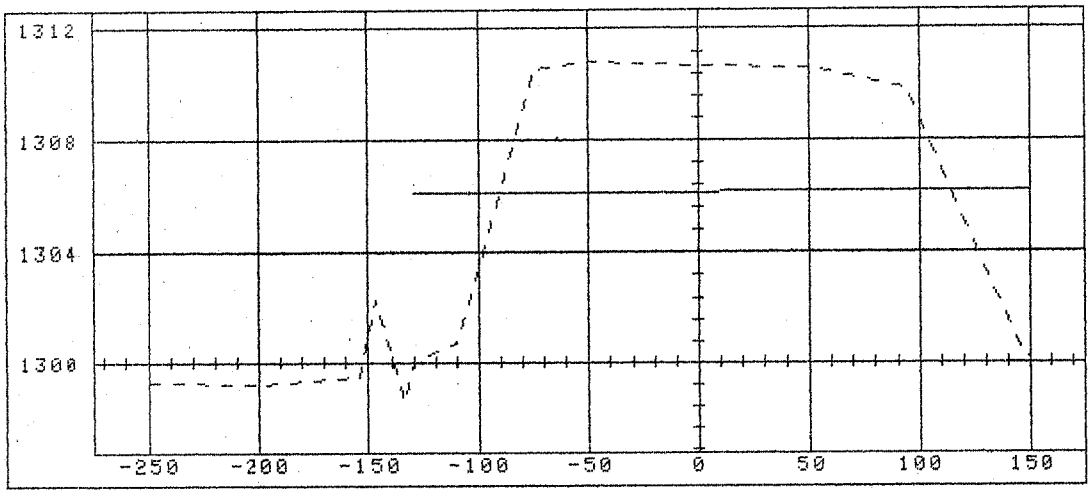

16+50.00

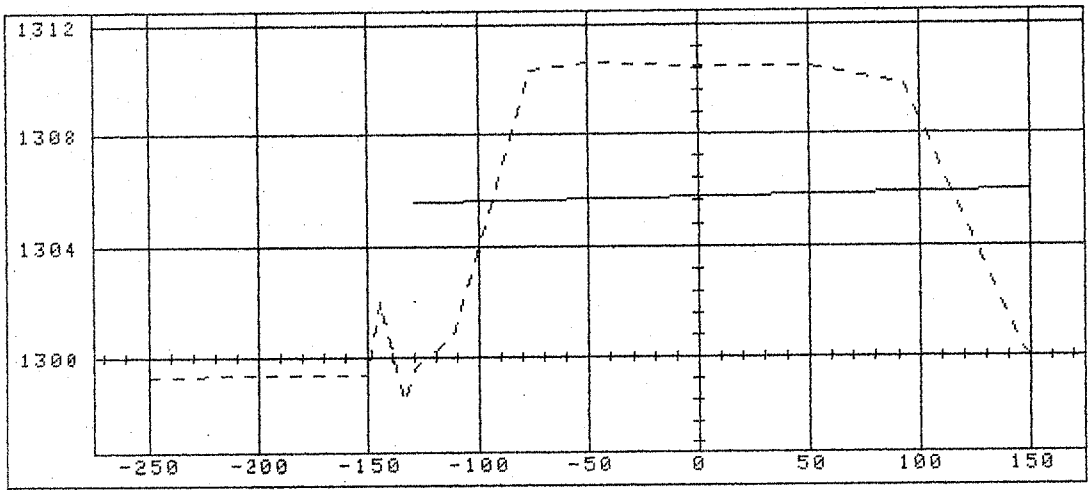

17+00.00

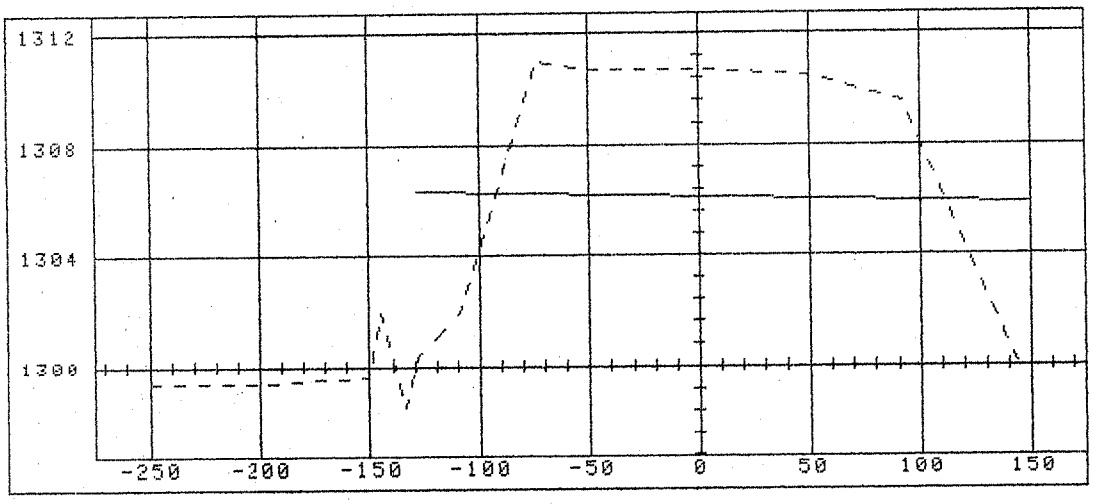

17+50.00

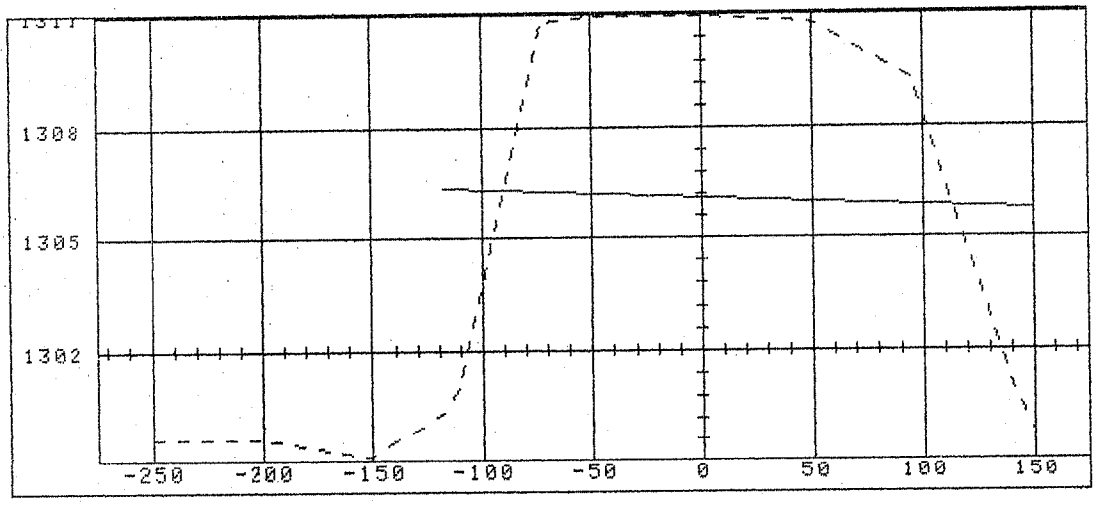

18+00.00

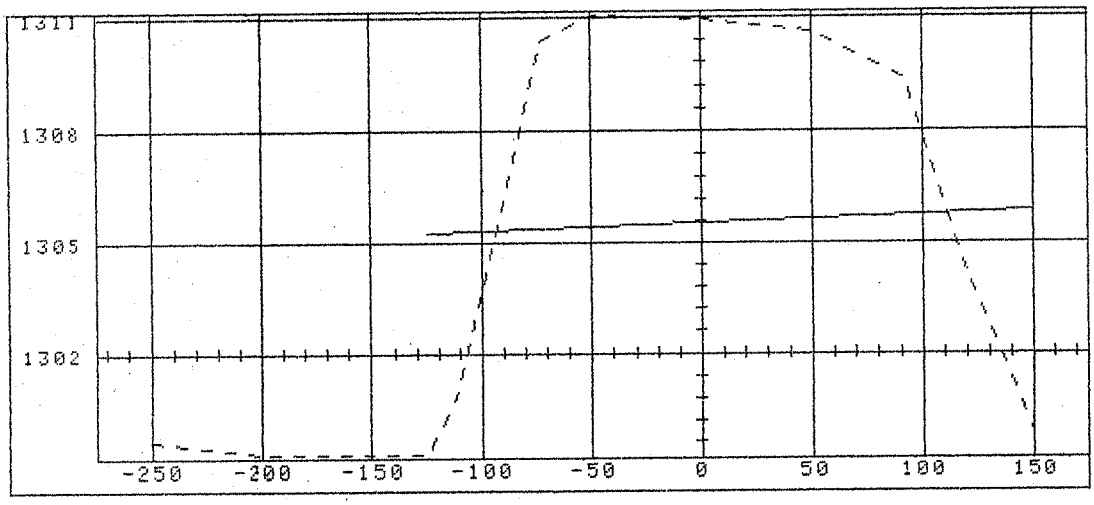

18+50.00

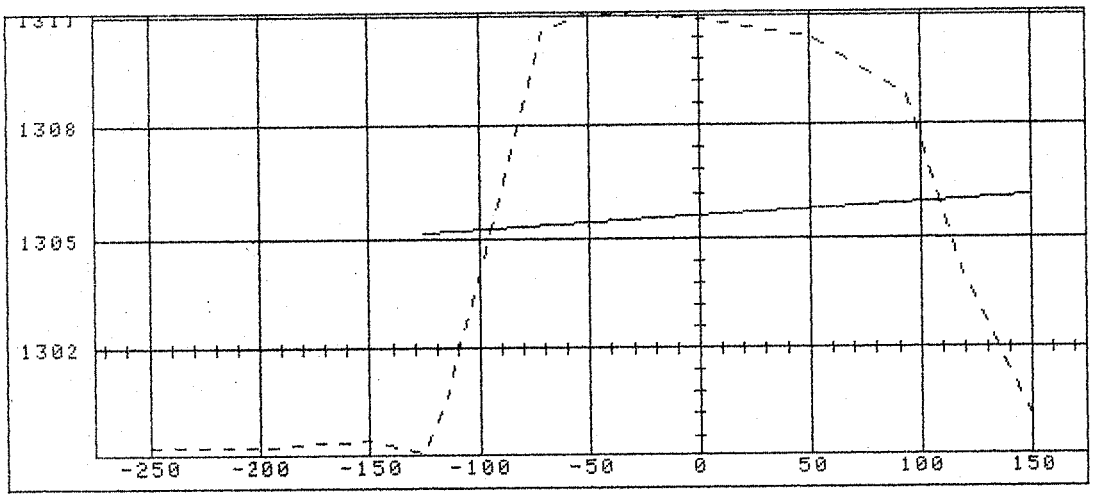

19+00.00

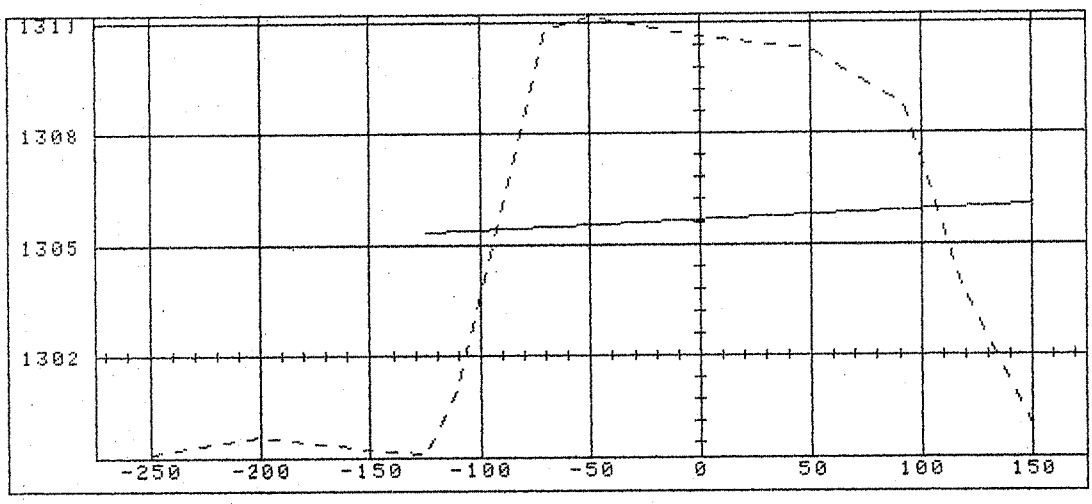

19+50.00

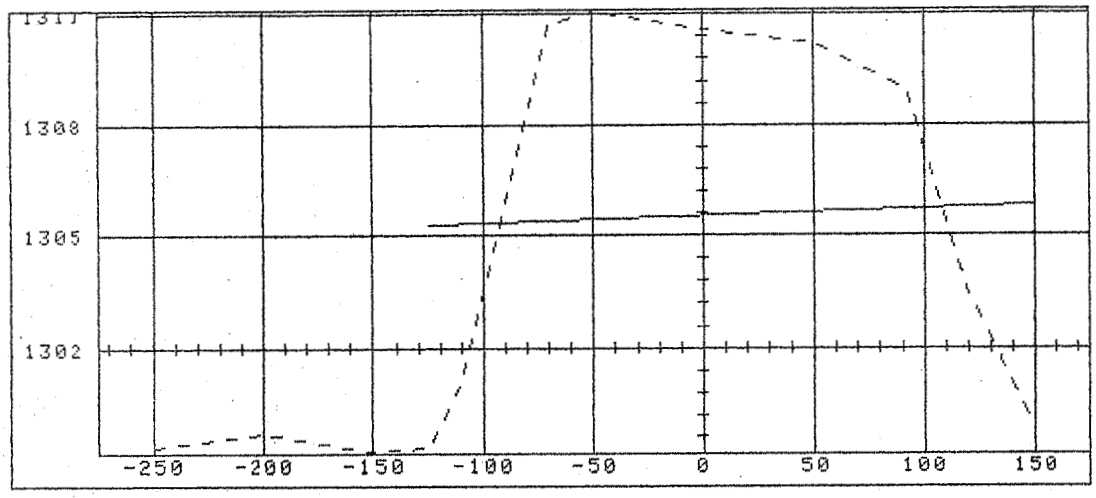

20+00.00

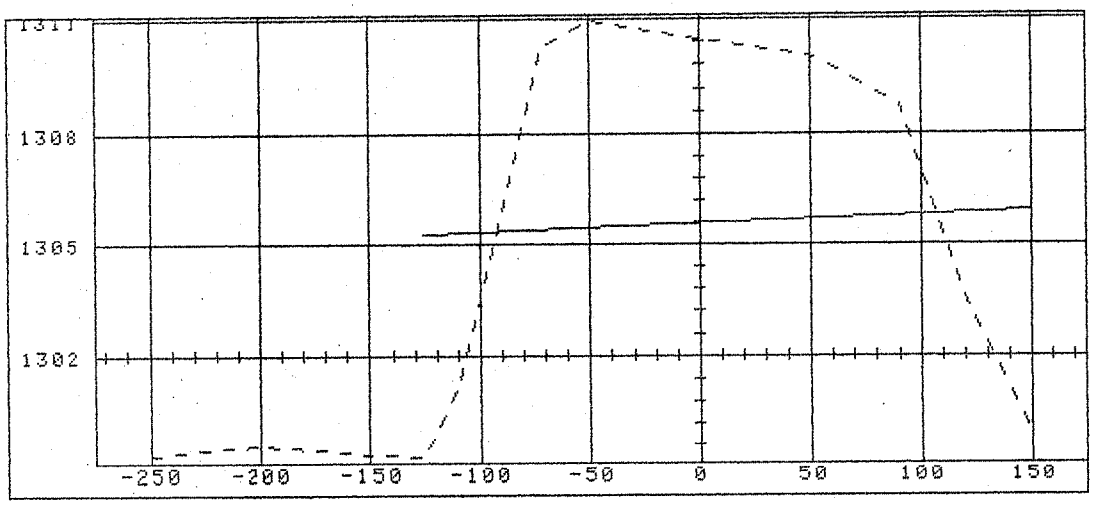

20+50.00

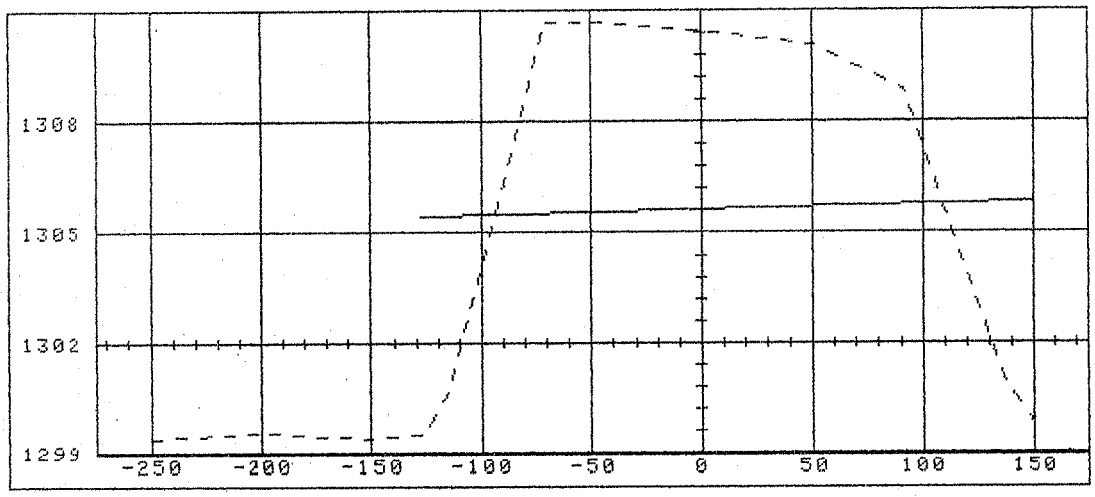

21+00.00

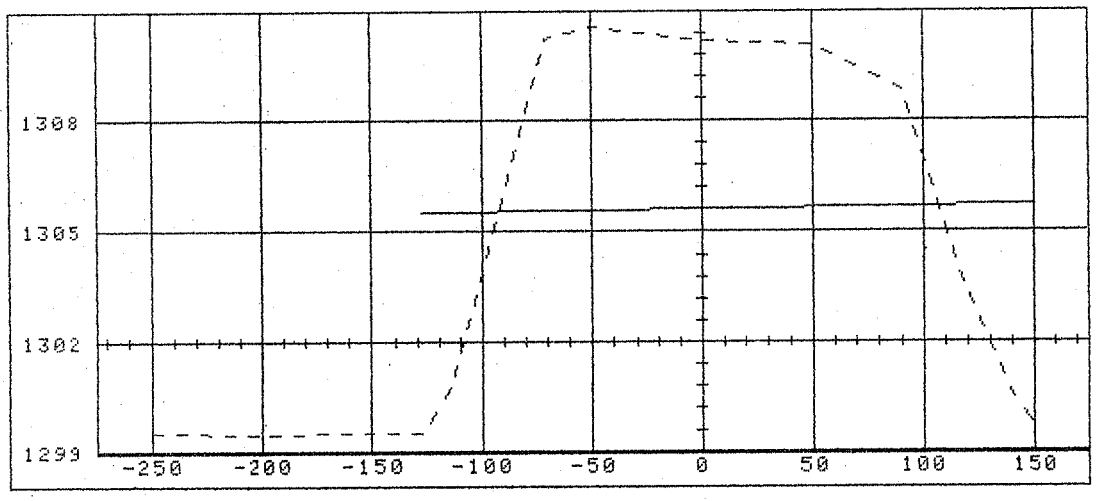

21+50.00

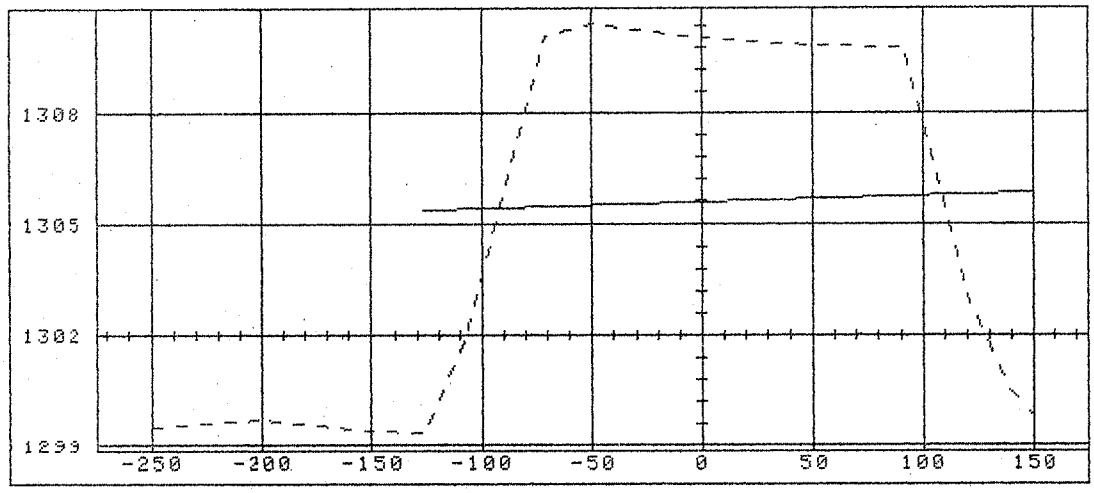

22+00.00

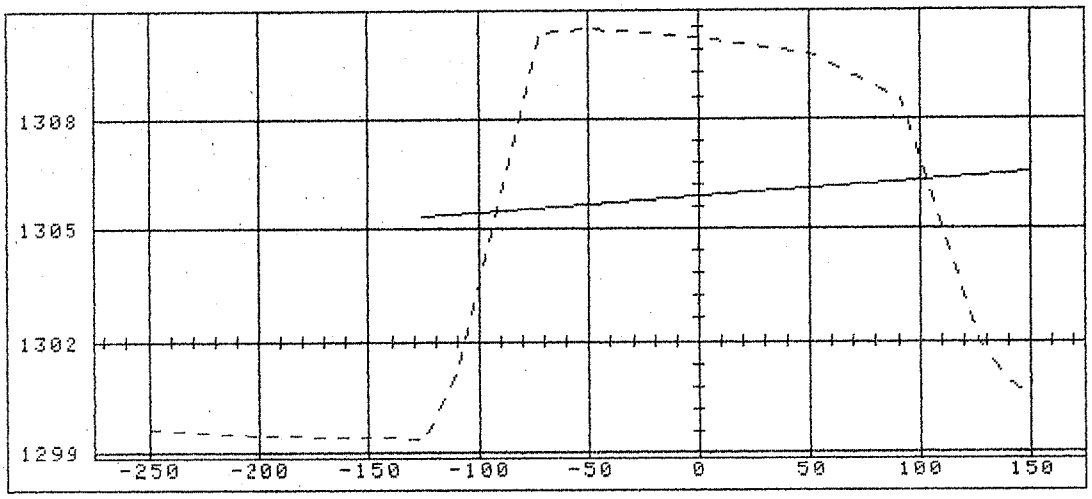

22+50.00

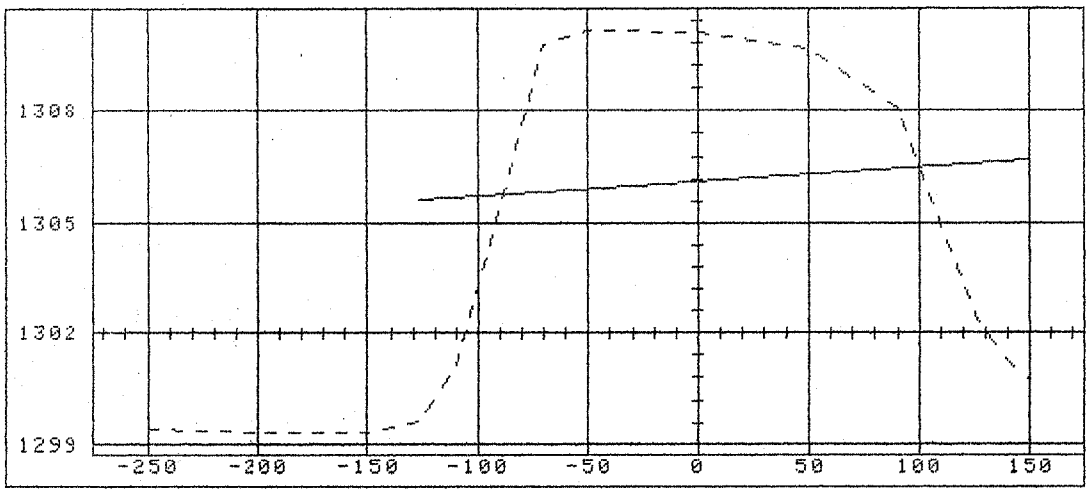

23+00.00

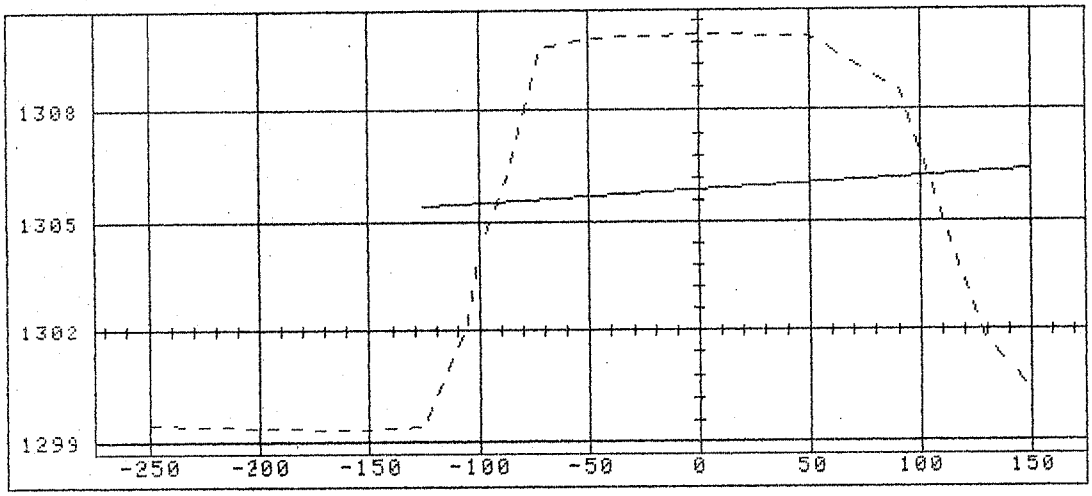

23+50.00

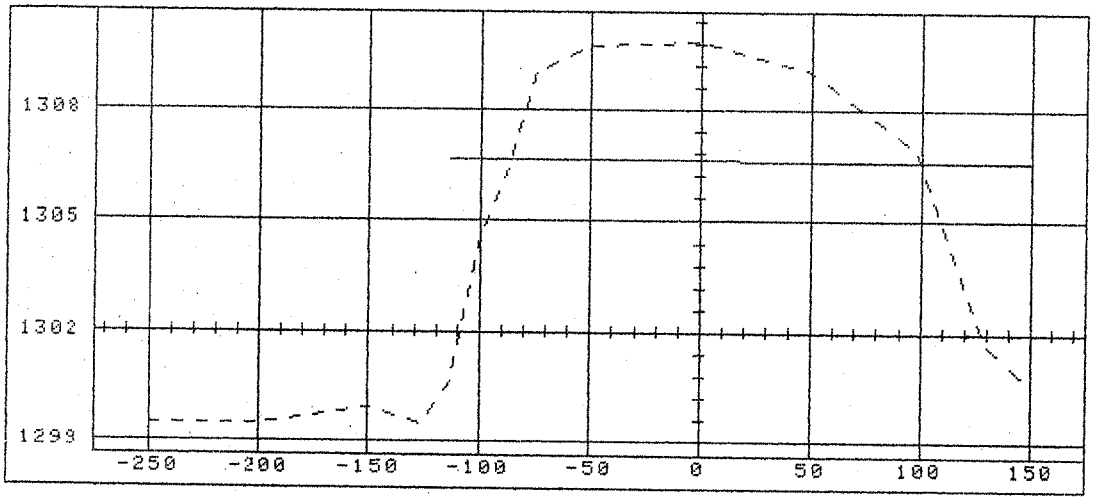

24+00.00

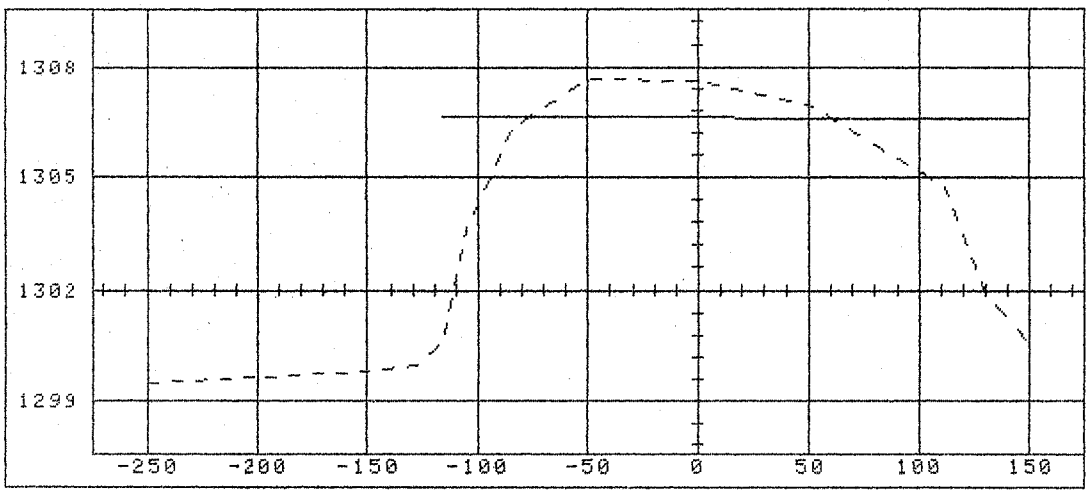

24+50.00

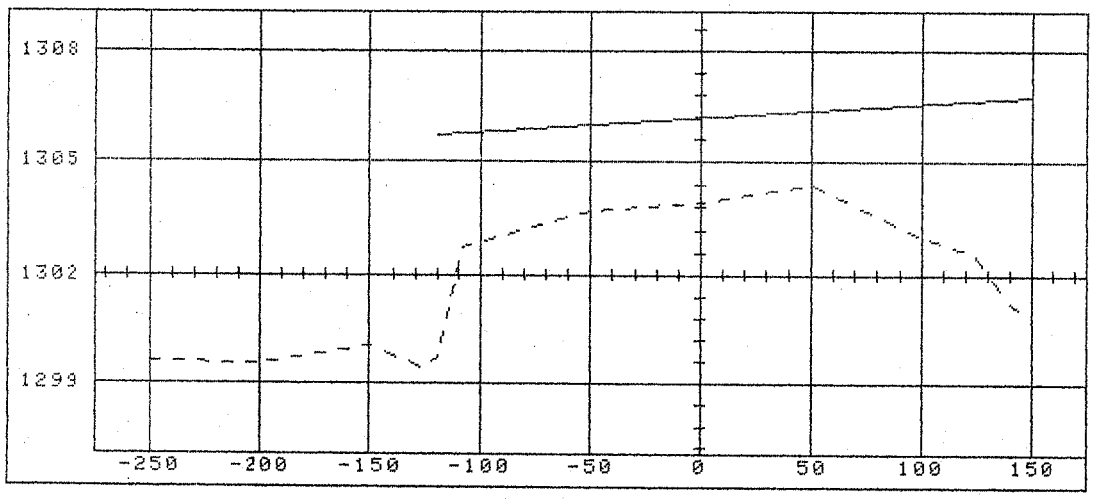

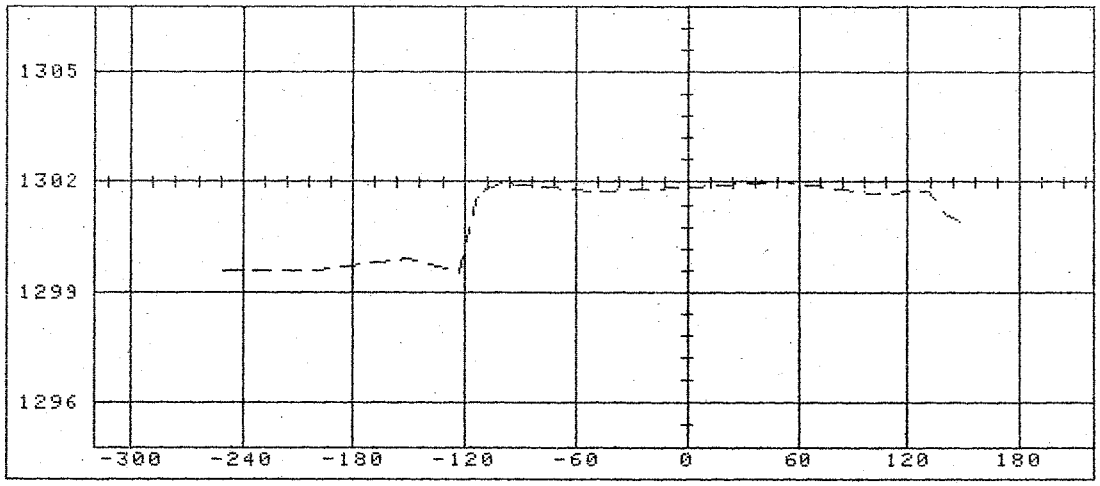

25+00.00

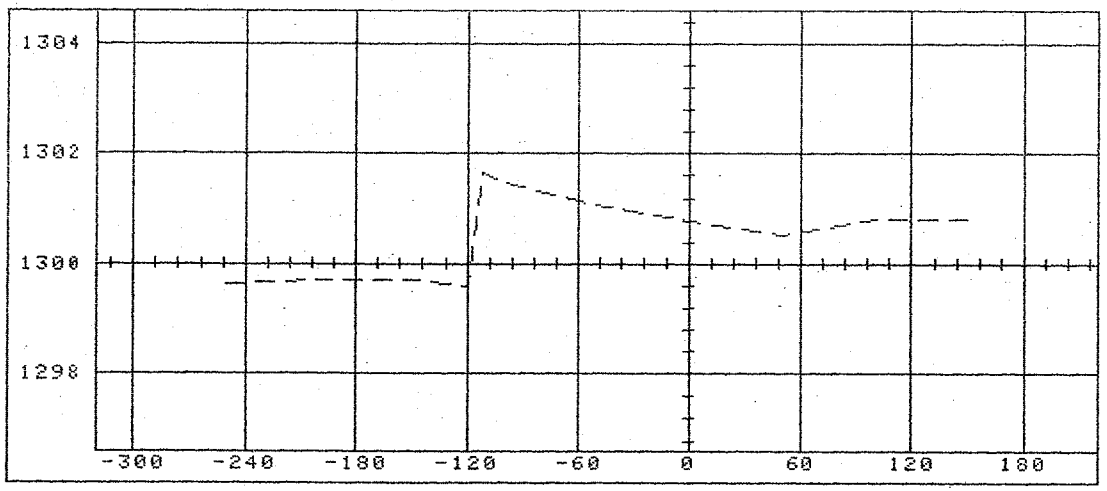

25+50.00

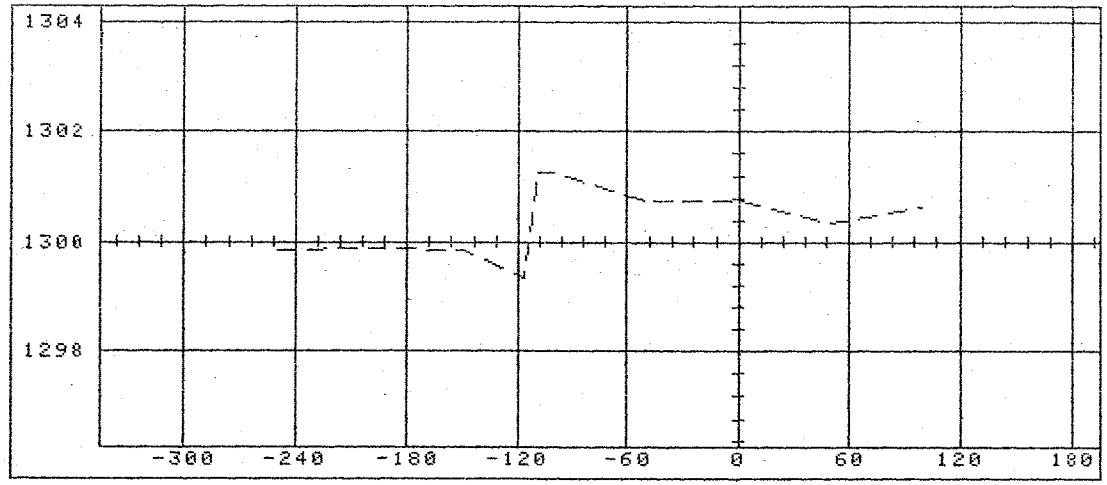

26+00.00

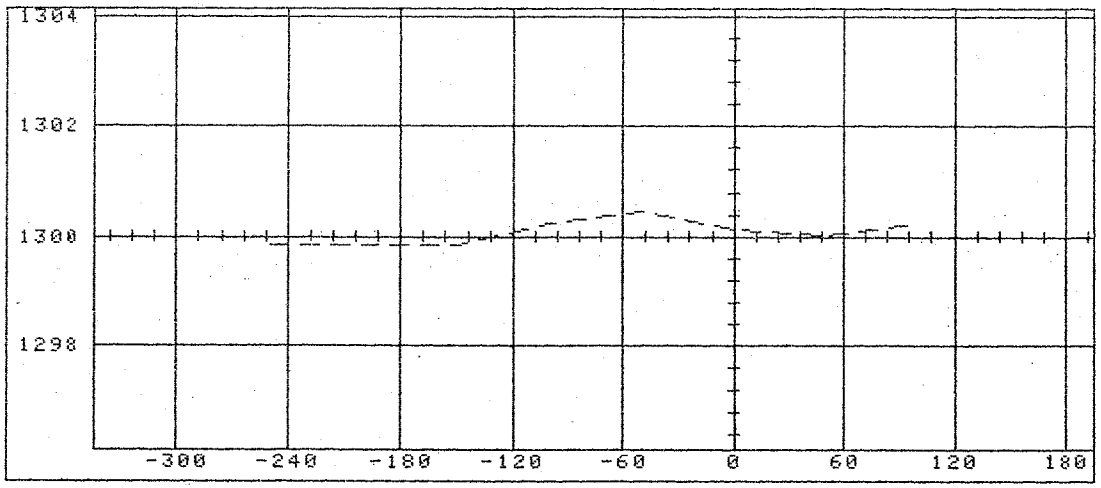

26+15.00

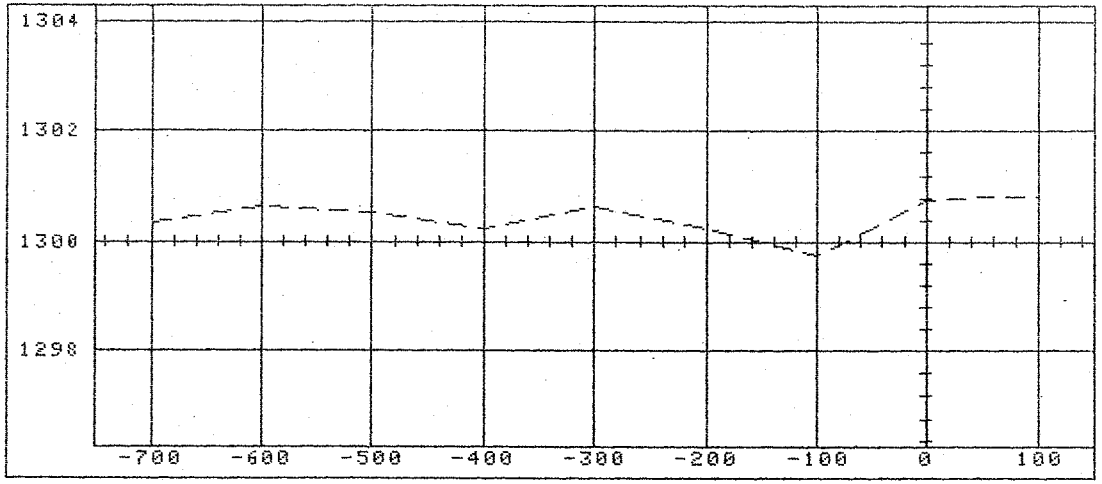

26+59.00

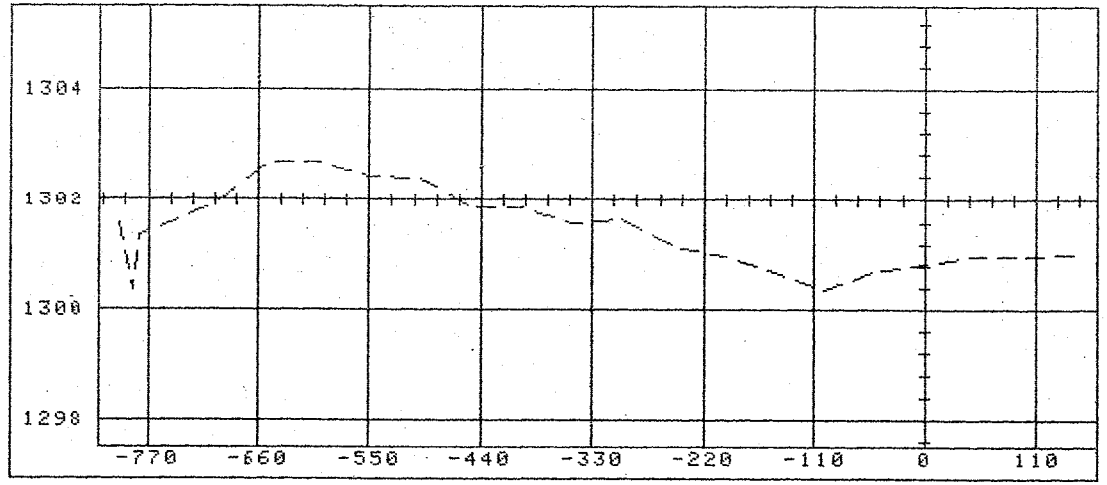

27+00.00

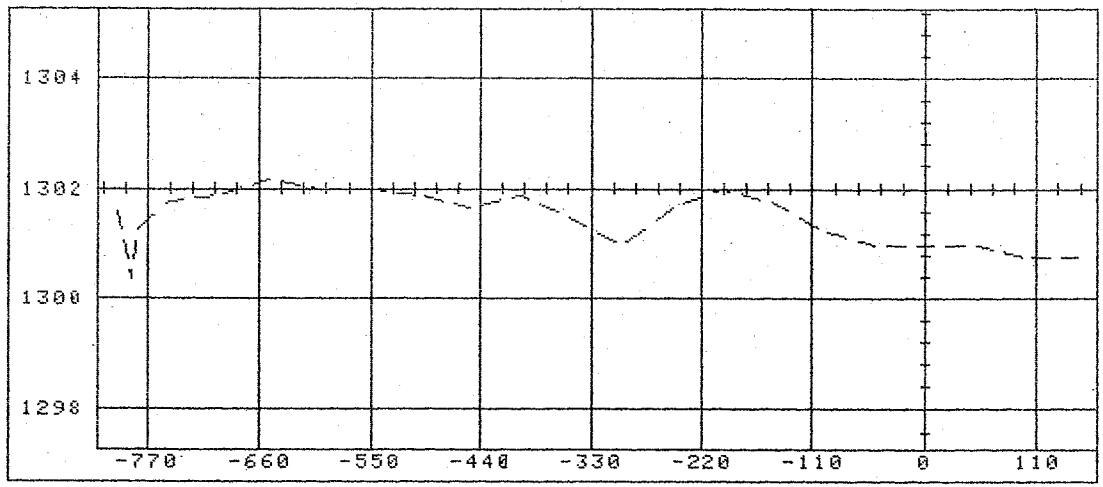

28+00.00

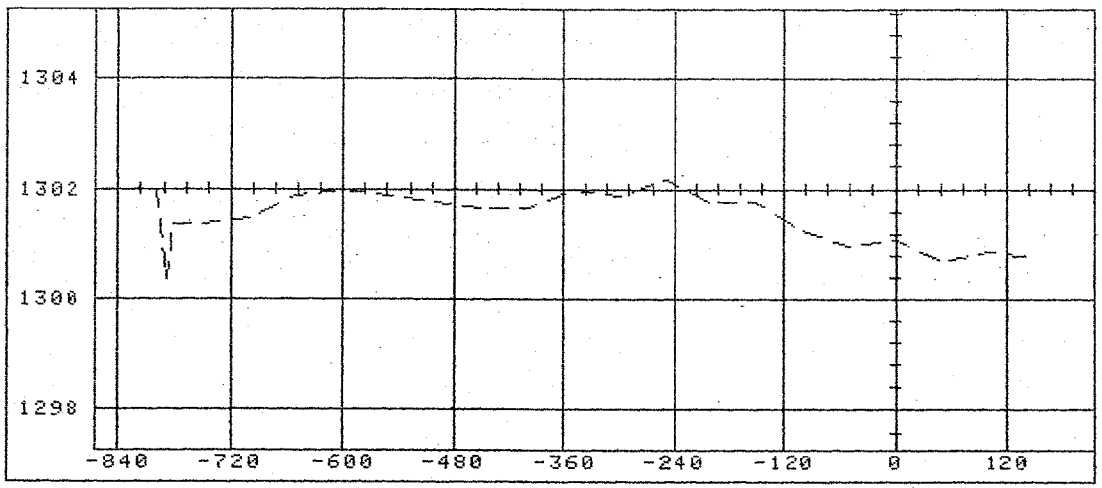

29+00.00

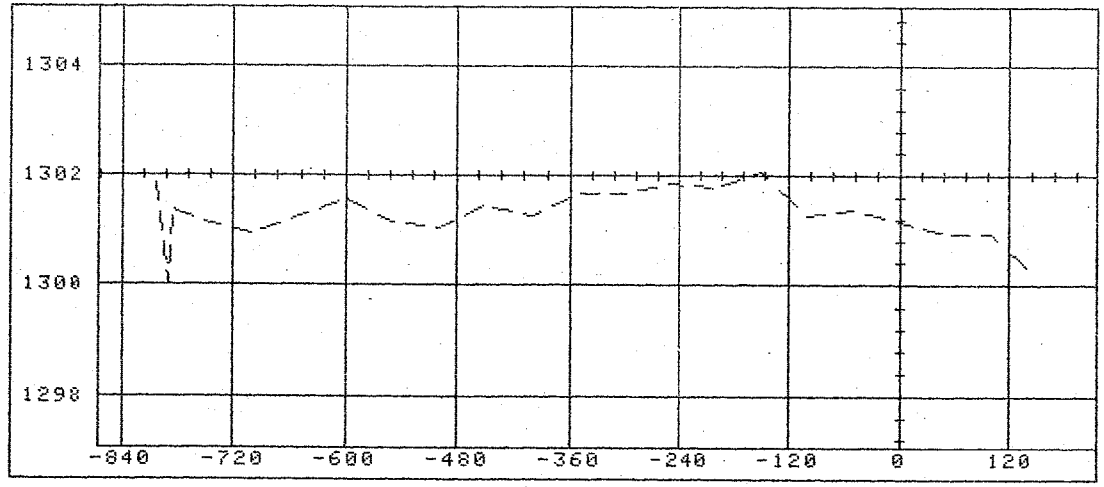

30+00.00

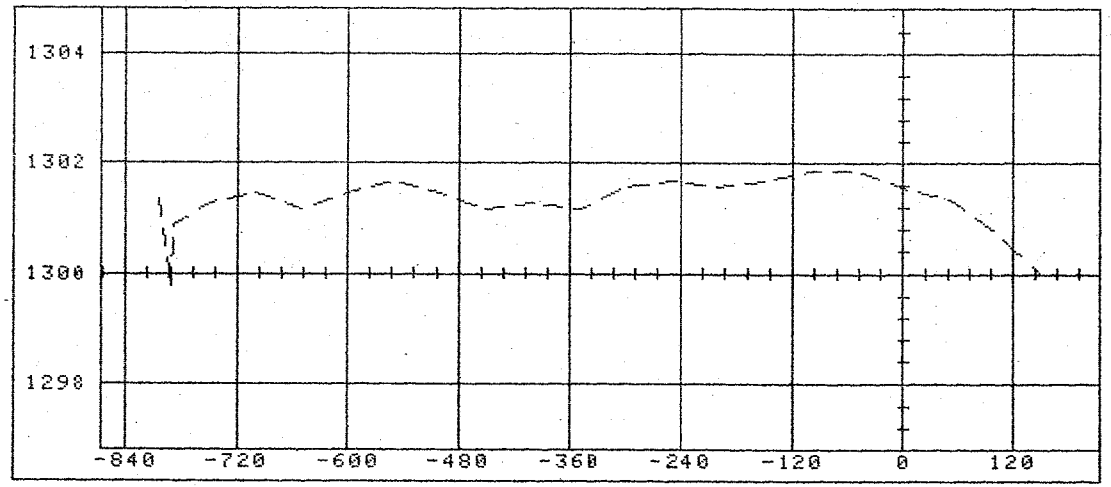

31+00.00

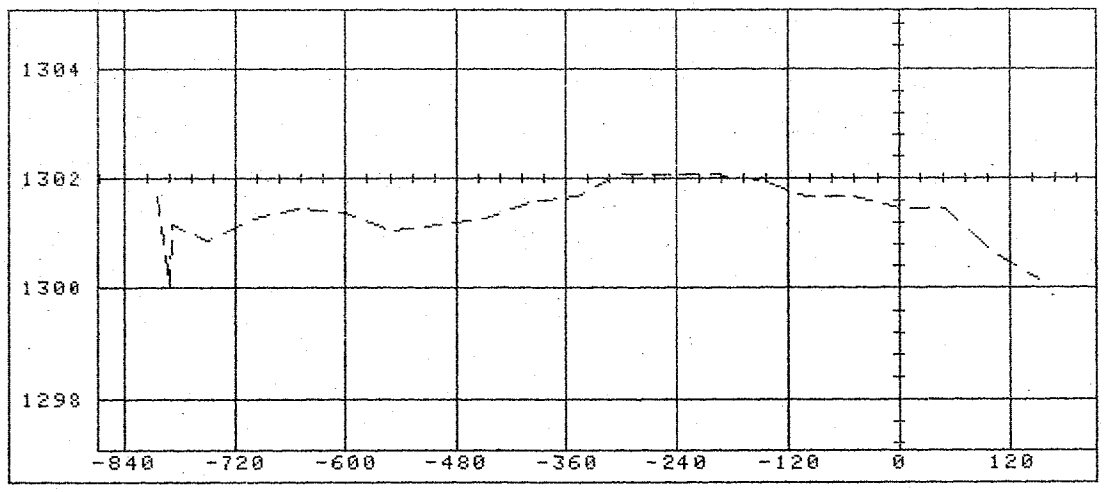

32+00.00

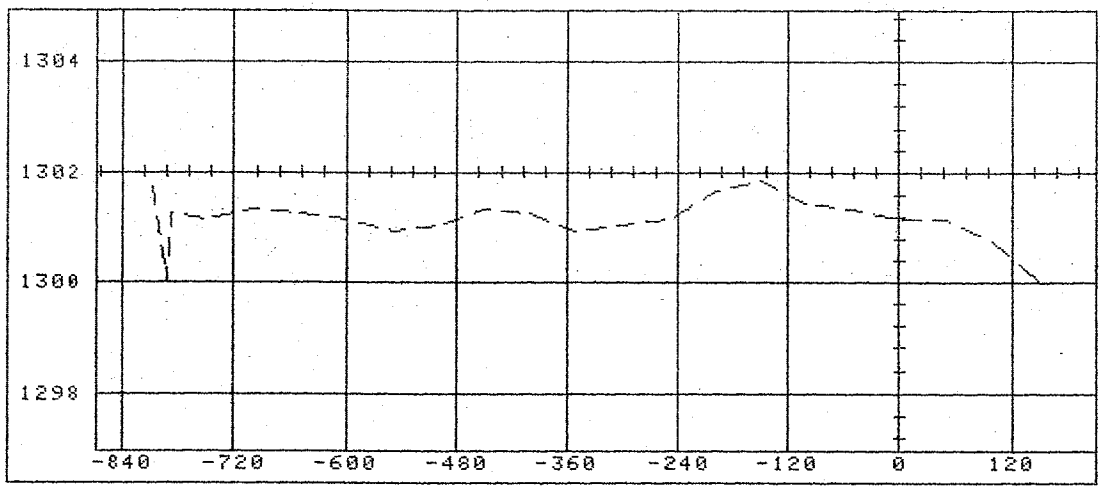

33+00.00

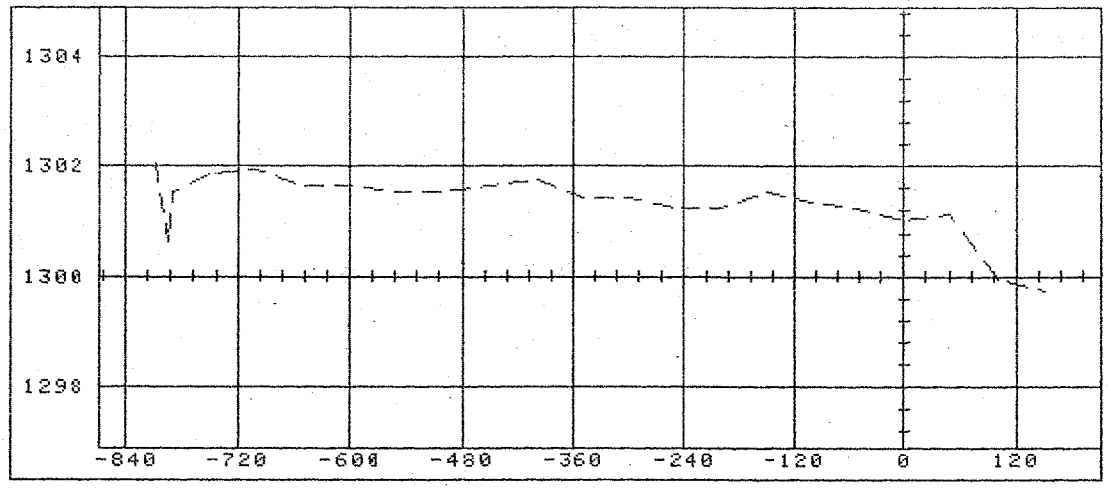

34+00.00

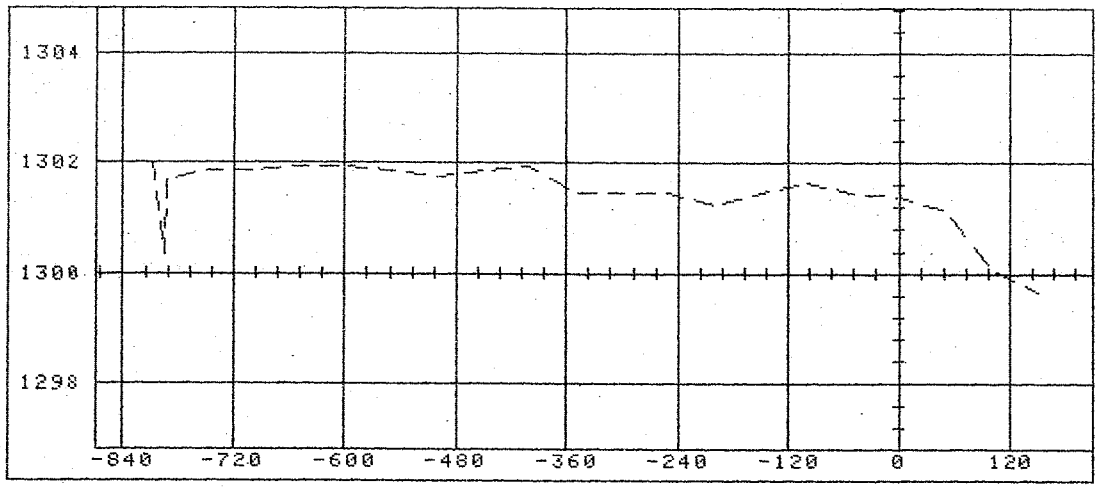

35+00.00

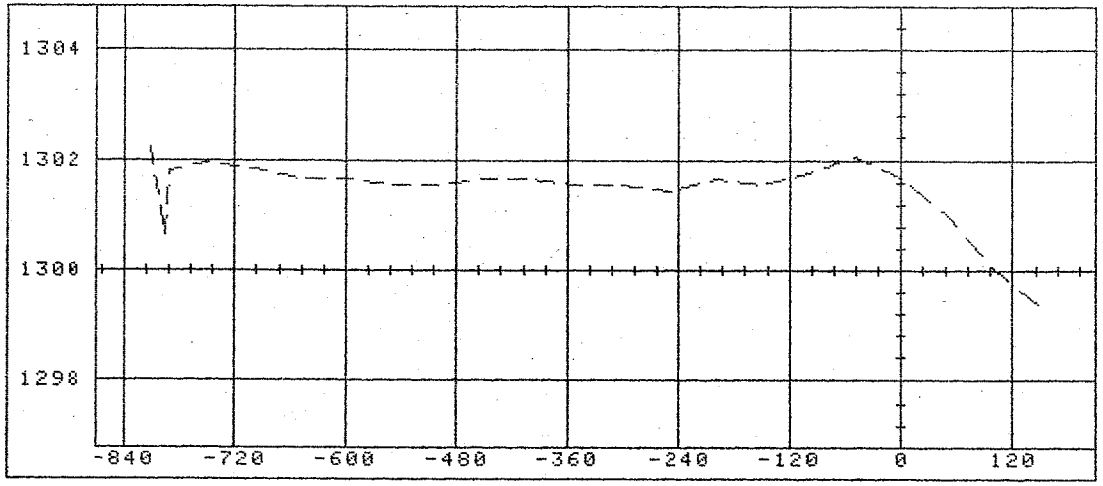

36+00.00

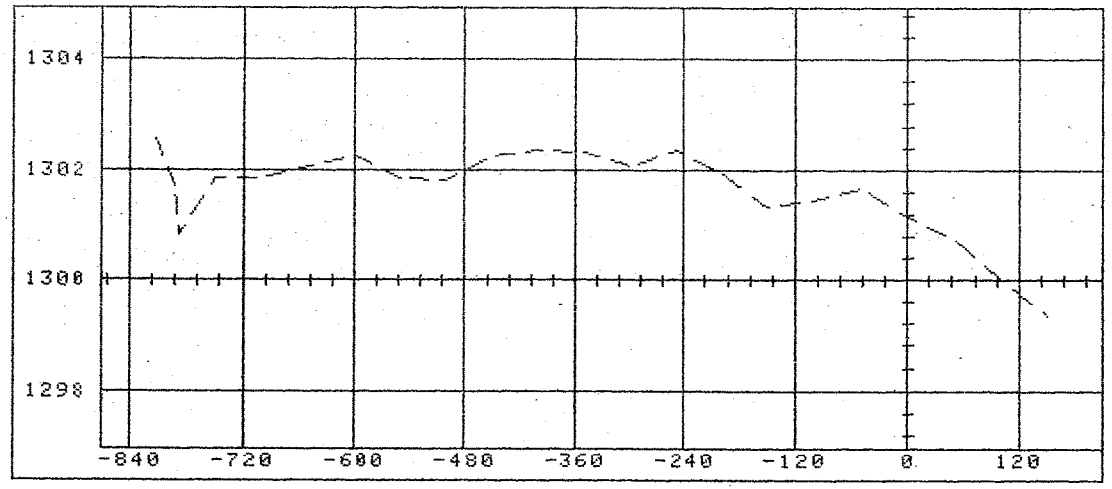

57+00.00

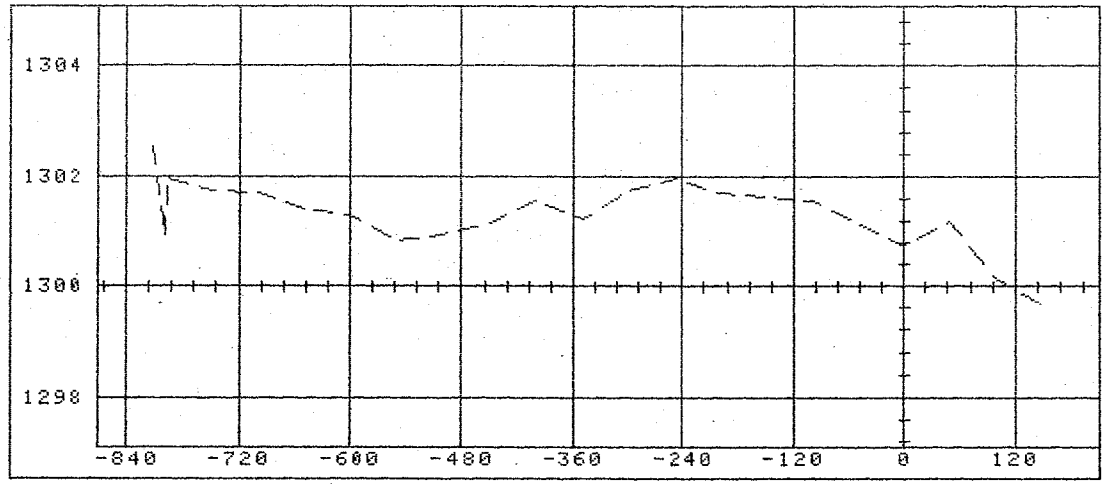

38+00.00

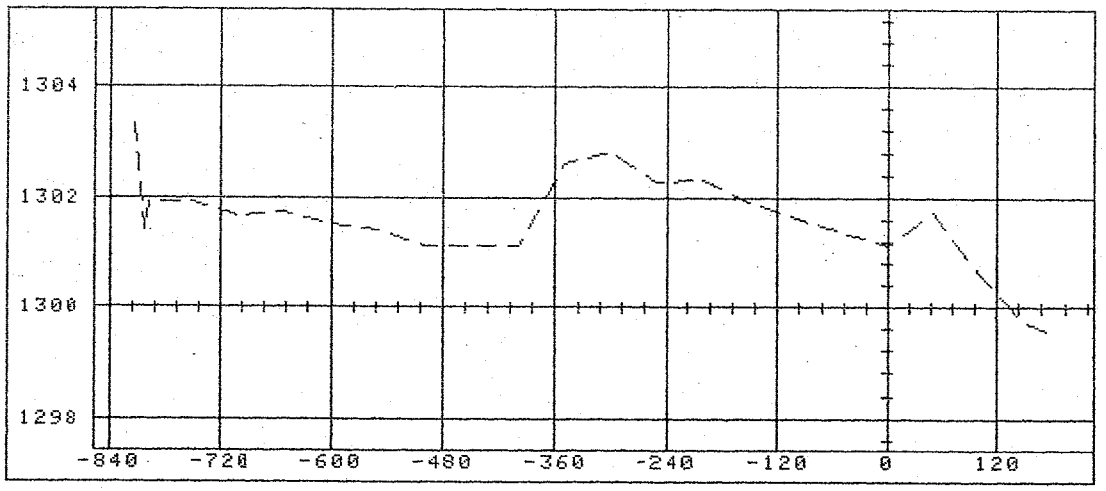

39+00.00

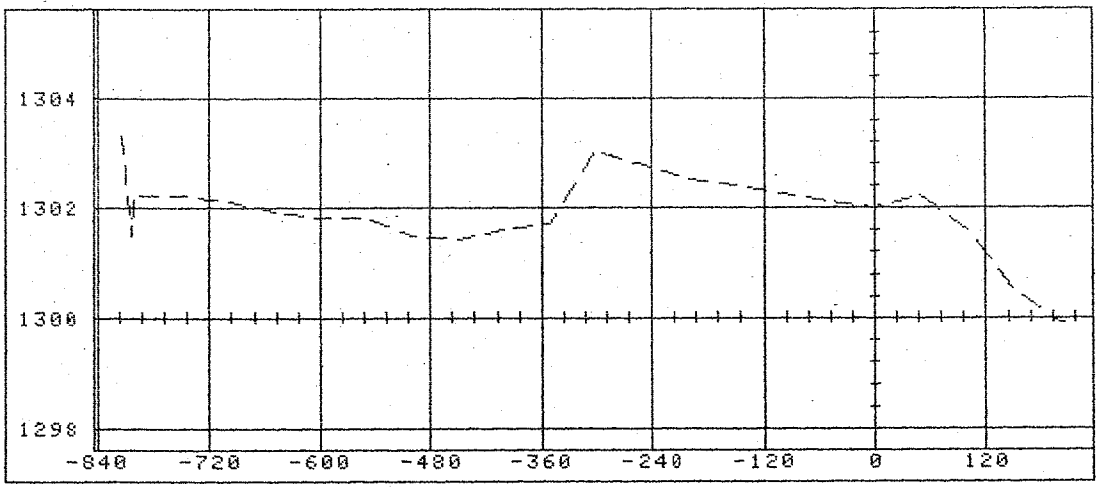

40+00.00

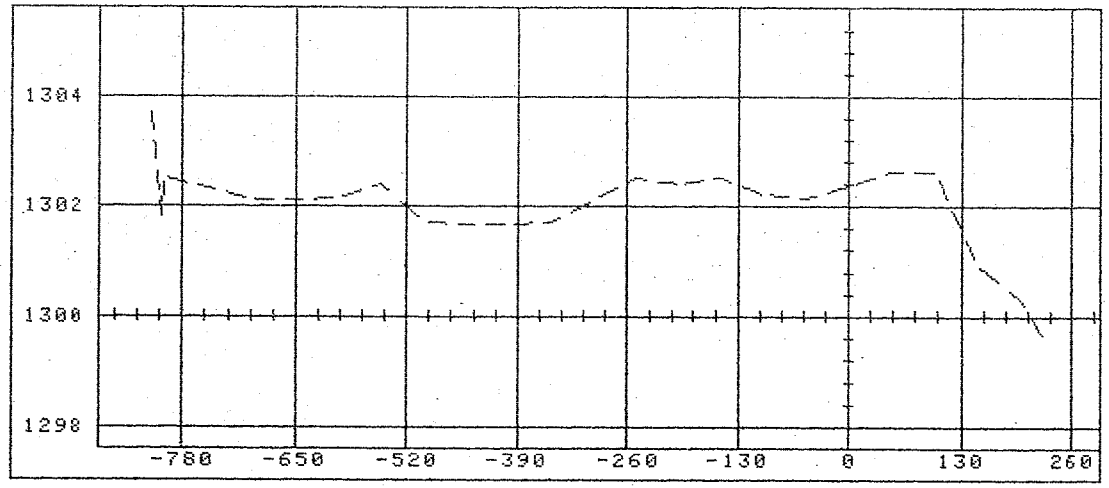

41+00.00

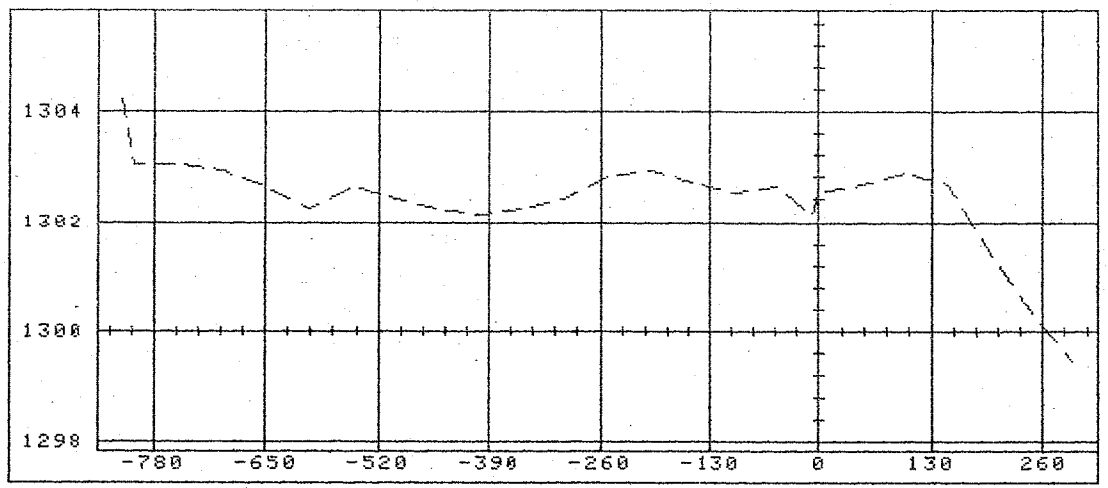

42+00.00

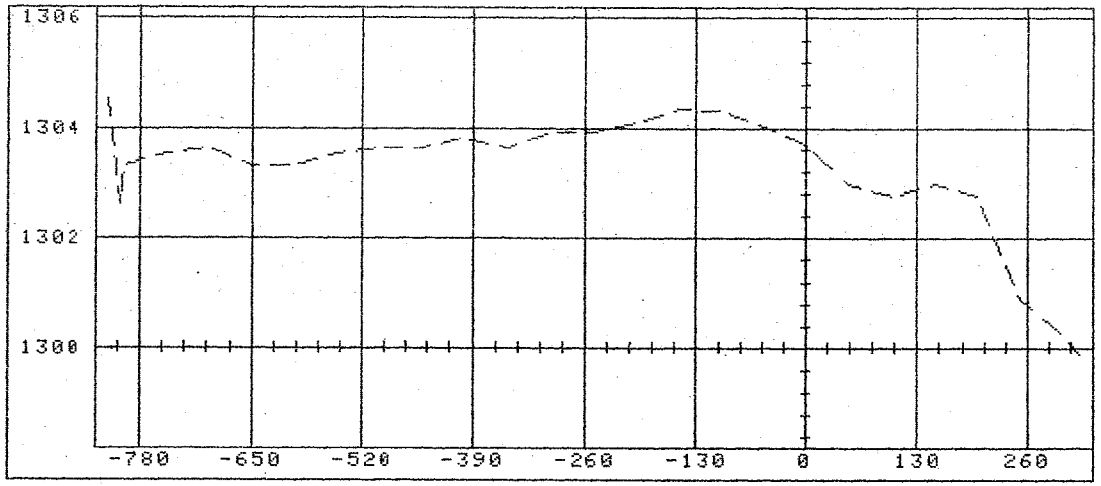

43+00.00

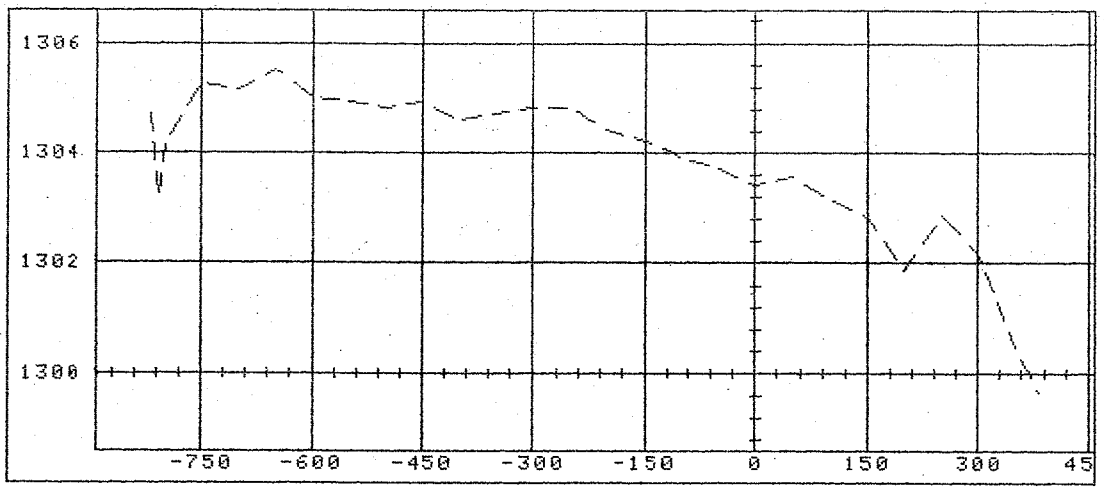

44+00.00

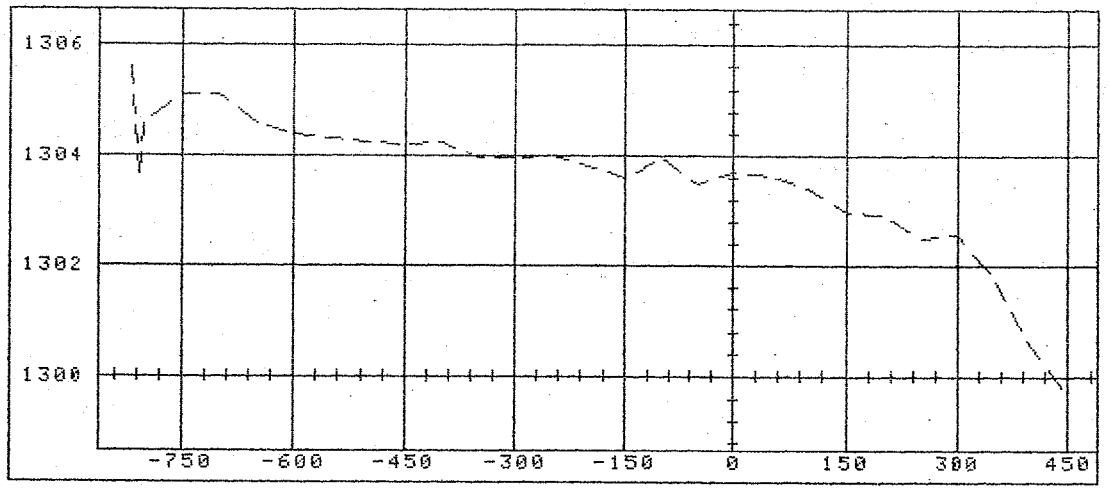

45+00.00

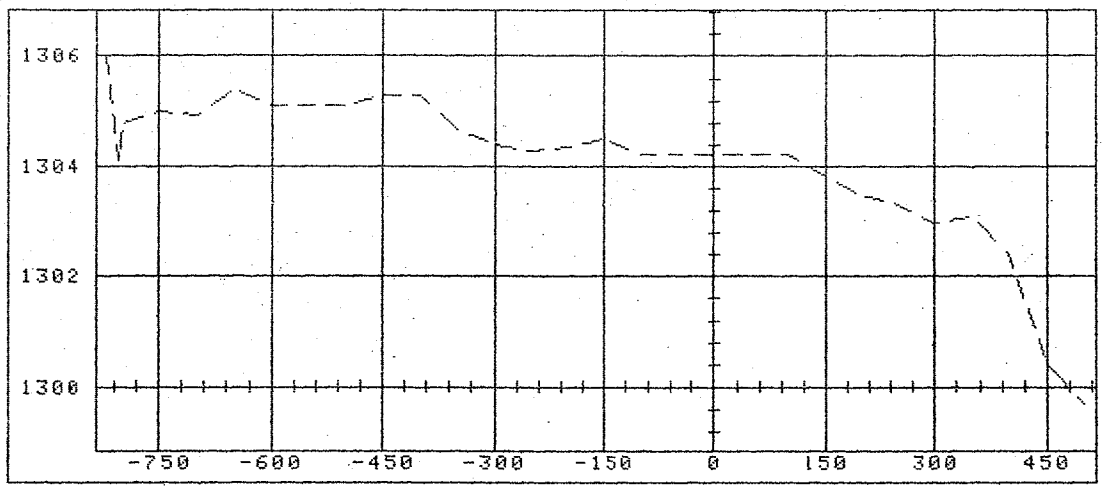

46+00.00

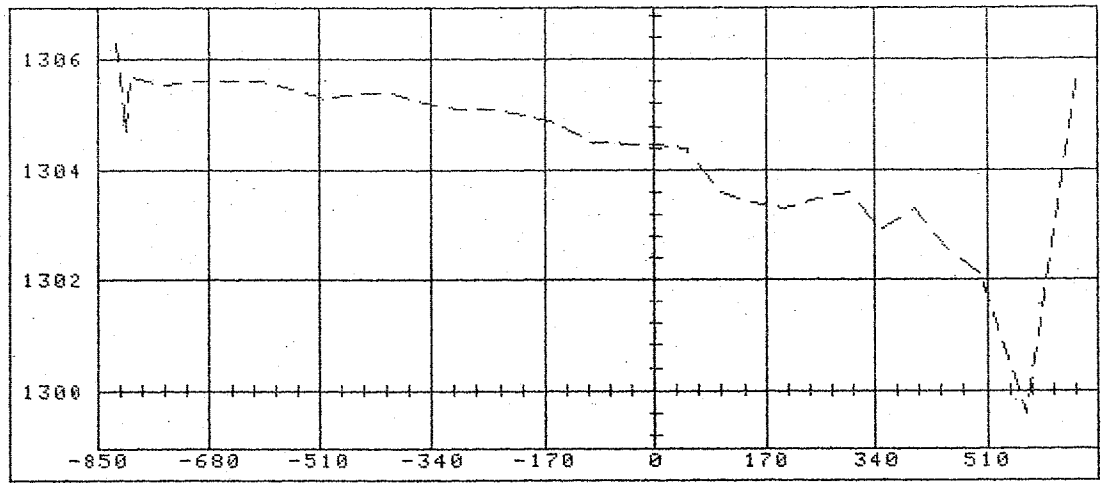

47+00.00

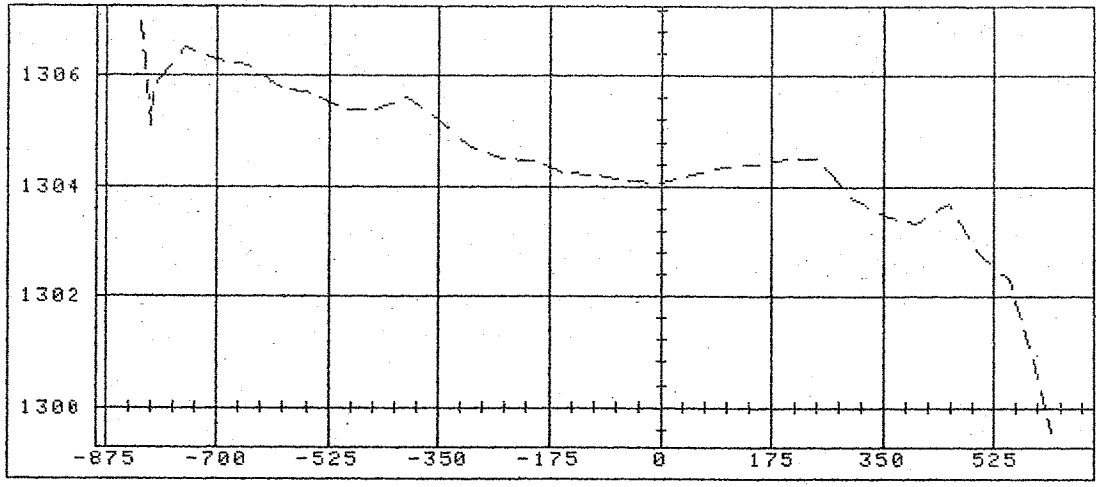

48+00.00

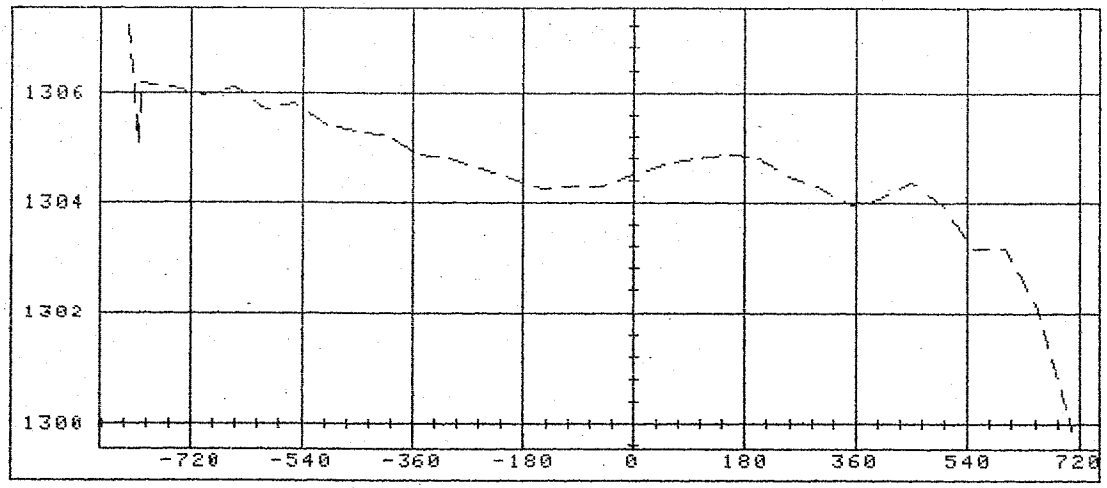

49+00.00

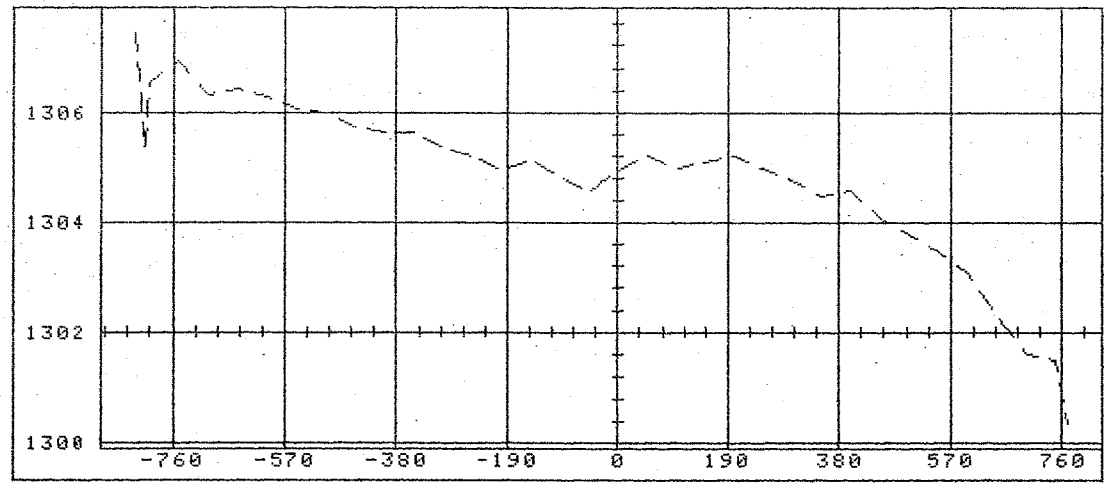

50+00.00

51+00.00

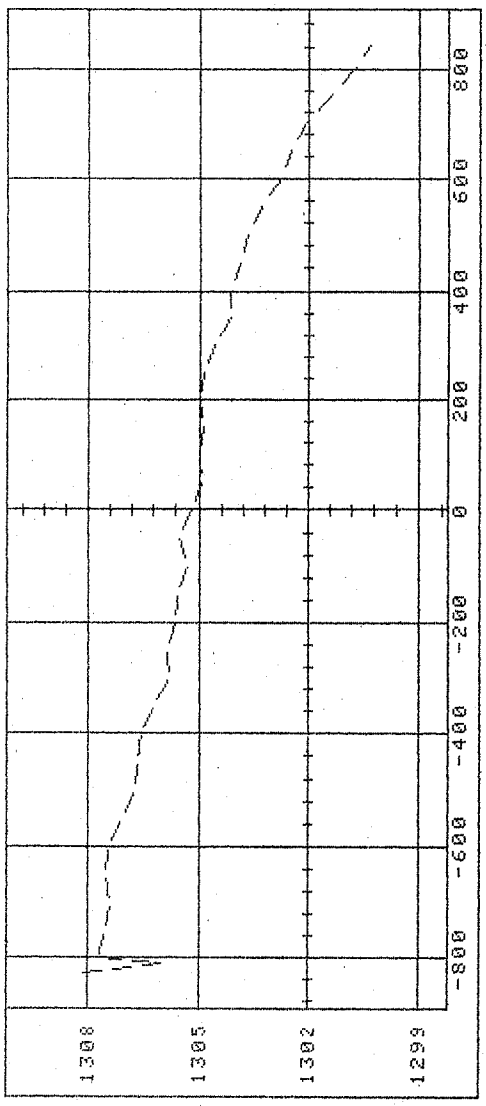

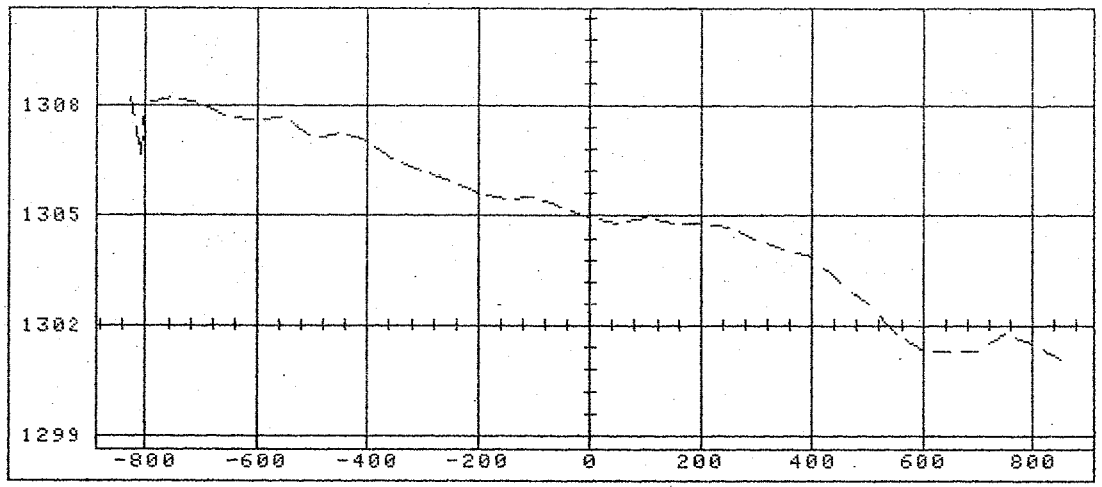

52+00.00

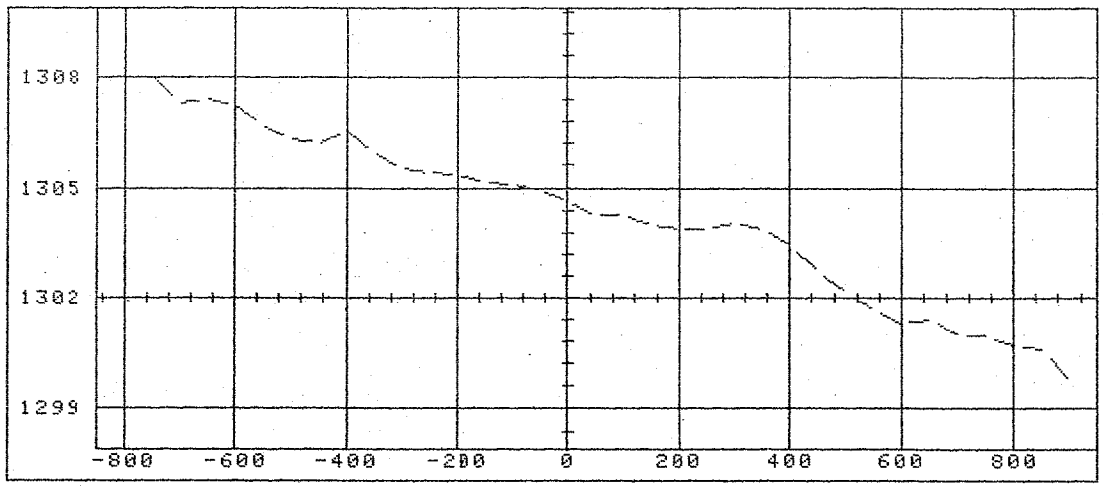

52+25.00

STATION : 1+00.00
H.I. : 1311.75

OFFSET	ROD	ELEVATION
- 150.00	9.45	1,302.30
- 125.00	9.80	1,301.95
- 100.00	9.15	1,302.60
-50.00	8.80	1,302.95
0.00	8.10	1,303.65
25.00	9.00	1,302.75
50.00	9.55	1,302.20
60.00	9.80	1,301.95

STATION : 1+25.00
H.I. : 1311.75

OFFSET	ROD	ELEVATION
- 105.00	5.50	1,306.25
- 100.00	5.65	1,306.10
-50.00	5.80	1,305.95
0.00	7.40	1,304.35
25.00	9.30	1,302.45
50.00	11.15	1,300.60
60.00	11.20	1,300.55
66.00	10.30	1,301.45
88.00	9.85	1,301.90

STATION : 1+50.00
H.I. : 1311.75

OFFSET	ROD	ELEVATION
- 245.00	10.85	1,300.90
- 200.00	10.75	1,301.00
- 150.00	10.95	1,300.80
- 131.50	10.15	1,301.60
- 116.00	9.20	1,302.55
- 107.00	5.50	1,306.25
- 100.00	5.60	1,306.15
-50.00	5.40	1,306.35
0.00	6.80	1,304.95
25.00	8.95	1,302.80
50.00	10.85	1,300.90
75.00	12.10	1,299.65
81.00	9.75	1,302.00
96.50	9.65	1,302.10

STATION : 2+00.00
H.I. : 1311.75

OFFSET	ROD	ELEVATION
- 240.00	11.10	1,300.65
- 200.00	11.05	1,300.70
- 150.00	11.20	1,300.55
- 136.00	10.45	1,301.30
- 132.00	12.50	1,299.25
- 128.50	10.80	1,300.95
- 120.00	10.15	1,301.60
- 104.00	5.30	1,306.45
- 100.00	5.40	1,306.35
-50.00	5.30	1,306.45
0.00	5.95	1,305.80
20.00	6.50	1,305.25
25.00	7.10	1,304.65
50.00	10.15	1,301.60
93.50	11.95	1,299.80
99.00	9.80	1,301.95
113.50	9.55	1,302.20

STATION : 2+50.00
H.I. : 1311.75

OFFSET	ROD	ELEVATION
- 240.00	11.35	1,300.40
- 200.00	11.20	1,300.55
- 150.00	10.75	1,301.00
- 135.00	10.65	1,301.10
- 131.00	12.40	1,299.35
- 127.00	10.90	1,300.85
- 120.00	10.10	1,301.65
- 101.00	5.25	1,306.50
- 100.00	5.25	1,306.50
-50.00	4.95	1,306.80
0.00	5.10	1,306.65
34.00	5.90	1,305.85
50.00	7.45	1,304.30
66.00	10.60	1,301.15
100.00	11.55	1,300.20
109.00	12.05	1,299.70
115.00	9.70	1,302.05
130.00	9.60	1,302.15

STATION : 3+00.00
H.I. : 1311.75

OFFSET	ROD	ELEVATION
- 240.00	11.10	1,300.65
- 200.00	11.15	1,300.60
- 150.00	10.95	1,300.80
- 136.00	10.75	1,301.00
- 132.00	12.30	1,299.45
- 127.50	10.50	1,301.25
- 119.00	10.15	1,301.60
- 100.00	5.20	1,306.55
-50.00	4.95	1,306.80
0.00	5.15	1,306.60
40.00	5.20	1,306.55
50.00	6.30	1,305.45
82.50	10.65	1,301.10
100.00	11.30	1,300.45
126.00	12.10	1,299.65
131.50	9.90	1,301.85
146.00	9.80	1,301.95

STATION : 3+50.00
H.I. : 1311.75

OFFSET	ROD	ELEVATION
- 240.00	11.30	1,300.45
- 200.00	11.20	1,300.55
- 150.00	11.00	1,300.75
- 137.00	10.85	1,300.90
- 133.00	11.95	1,299.80
- 129.00	10.80	1,300.95
- 120.00	10.40	1,301.35
- 100.00	6.00	1,305.75
-90.00	3.50	1,308.25
-50.00	3.30	1,308.45
0.00	3.70	1,308.05
43.00	4.00	1,307.75
97.00	11.15	1,300.60
140.00	12.25	1,299.50
147.00	10.05	1,301.70
161.50	9.90	1,301.85

STATION : 4+00.00
H.I. : 1311.75

OFFSET	ROD	ELEVATION
- 240.00	11.15	1,300.60
- 200.00	11.20	1,300.55

- 150.00	11.40	1,300.35
- 136.00	11.20	1,300.55
- 133.50	12.10	1,299.65
- 129.00	10.85	1,300.90
- 122.00	10.50	1,301.25
-79.00	2.05	1,309.70
-50.00	2.35	1,309.40
0.00	2.75	1,309.00
50.00	3.70	1,308.05
75.00	6.20	1,305.55
100.00	10.20	1,301.55
150.00	11.85	1,299.90

STATION : 4+50.00
H.I. : 1316

OFFSET	ROD	ELEVATION
- 240.00	15.45	1,300.55
- 200.00	15.50	1,300.50
- 150.00	15.40	1,300.60
- 137.00	15.10	1,300.90
- 133.00	16.65	1,299.35
- 129.00	14.95	1,301.05
- 120.00	14.60	1,301.40
-79.00	6.50	1,309.50
-50.00	6.20	1,309.80
0.00	6.50	1,309.50
50.00	7.25	1,308.75
61.00	7.25	1,308.75
104.00	14.15	1,301.85
150.00	15.80	1,300.20

STATION : 5+00.00
H.I. : 1316

OFFSET	ROD	ELEVATION
- 240.00	15.50	1,300.50
- 200.00	15.55	1,300.45
- 150.00	15.35	1,300.65
- 136.00	15.15	1,300.85
- 133.00	16.60	1,299.40
- 128.00	15.00	1,301.00
- 120.00	14.85	1,301.15
-74.00	5.50	1,310.50
-50.00	5.50	1,310.50
0.00	6.30	1,309.70
50.00	7.05	1,308.95
70.00	7.40	1,308.60
111.00	14.40	1,301.60
150.00	15.60	1,300.40

STATION : 5+50.00
H.I. : 1316

OFFSET	ROD	ELEVATION
- 240.00	15.55	1,300.45
- 200.00	15.60	1,300.40
- 150.00	15.40	1,300.60
- 137.00	15.00	1,301.00
- 133.00	16.90	1,299.10
- 128.00	15.25	1,300.75
- 119.00	14.60	1,301.40
-72.00	4.80	1,311.20
-50.00	5.20	1,310.80
0.00	5.90	1,310.10
50.00	6.50	1,309.50
75.00	7.05	1,308.95
111.00	14.20	1,301.80
150.00	15.85	1,300.15

STATION : 6+00.00
H.I. : 1316

OFFSET	ROD	ELEVATION
- 241.00	15.55	1,300.45
- 200.00	15.75	1,300.25
- 150.00	15.50	1,300.50
- 138.00	15.15	1,300.85
- 133.00	16.85	1,299.15
- 129.00	15.05	1,300.95
- 119.00	14.60	1,301.40
-70.00	5.05	1,310.95
-50.00	5.00	1,311.00
0.00	5.50	1,310.50
50.00	6.30	1,309.70
79.00	6.65	1,309.35
113.00	13.95	1,302.05
150.00	16.00	1,300.00

STATION : 6+50.00
H.I. : 1316

OFFSET	ROD	ELEVATION
- 242.00	15.60	1,300.40
- 200.00	15.65	1,300.35
- 150.00	15.65	1,300.35
- 138.00	15.60	1,300.40

- 135.00	16.70	1,299.30
- 128.00	15.00	1,301.00
- 120.00	14.80	1,301.20
-70.00	4.70	1,311.30
-50.00	5.10	1,310.90
0.00	5.45	1,310.55
50.00	6.20	1,309.80
82.00	6.80	1,309.20
119.00	13.60	1,302.40
150.00	15.90	1,300.10

STATION : 7+00.00
H.I. : 1316

OFFSET	ROD	ELEVATION
- 242.00	15.60	1,300.40
- 200.00	15.65	1,300.35
- 150.00	15.95	1,300.05
- 138.00	15.10	1,300.90
- 135.00	16.95	1,299.05
- 130.00	14.95	1,301.05
- 124.00	15.00	1,301.00
-72.00	5.00	1,311.00
-50.00	4.80	1,311.20
0.00	5.20	1,310.80
50.00	6.00	1,310.00
86.00	6.90	1,309.10
119.00	13.80	1,302.20
150.00	15.50	1,300.50

STATION : 7+50.00
H.I. : 1316

OFFSET	ROD	ELEVATION
- 241.00	15.55	1,300.45
- 200.00	15.75	1,300.25
- 150.00	15.55	1,300.45
- 139.00	14.95	1,301.05
- 134.00	16.80	1,298.20
- 130.00	15.10	1,300.90
- 124.00	15.35	1,300.65
-71.00	4.90	1,311.10
-50.00	4.85	1,311.15
0.00	5.30	1,310.70
50.00	6.00	1,310.00
87.00	6.85	1,309.15
123.00	12.60	1,303.40
150.00	14.95	1,301.05

STATION : 8+00.00
H.I. : 1316

OFFSET	ROD	ELEVATION
- 242.00	15.65	1,300.35
- 200.00	15.70	1,300.30
- 150.00	15.70	1,300.30
- 138.00	15.10	1,300.90
- 134.00	17.00	1,299.00
- 129.00	15.05	1,300.95
- 120.00	14.80	1,301.20
-72.00	5.15	1,310.85
-50.00	4.75	1,311.25
0.00	5.20	1,310.80
50.00	5.60	1,310.40
88.00	6.30	1,309.70
130.00	13.40	1,302.60
150.00	15.20	1,300.80

STATION : 8+50.00
H.I. : 1316

OFFSET	ROD	ELEVATION
- 241.00	15.60	1,300.40
- 200.00	15.60	1,300.40
- 150.00	15.60	1,300.40
- 138.00	15.65	1,300.35
- 133.00	16.50	1,299.50
- 128.00	14.95	1,301.05
- 119.00	14.45	1,301.55
-74.00	5.40	1,310.60
-50.00	4.90	1,311.10
0.00	5.15	1,310.85
50.00	5.50	1,310.50
91.00	6.15	1,309.85
145.00	15.20	1,300.80
150.00	15.40	1,300.60

STATION : 9+00.00
H.I. : 1316

OFFSET	ROD	ELEVATION
- 240.00	15.75	1,300.25
- 200.00	15.75	1,300.25
- 150.00	15.70	1,300.30
- 139.00	15.55	1,300.45
- 134.00	17.20	1,298.80
- 129.00	15.20	1,300.80
- 119.00	14.40	1,301.60

-72.00	5.40	1,310.60
-50.00	4.80	1,311.20
0.00	5.00	1,311.00
50.00	5.55	1,310.45
91.00	6.05	1,309.95
144.00	14.85	1,301.15
150.00	15.15	1,300.85

STATION : 9+50.00
H.I. : 1316.39

OFFSET	ROD	ELEVATION
- 241.00	16.10	1,300.29
- 200.00	16.00	1,300.39
- 150.00	16.00	1,300.39
- 138.00	16.00	1,300.39
- 134.00	17.40	1,298.99
- 129.00	15.85	1,300.54
- 122.00	15.60	1,300.79
-71.00	5.25	1,311.14
-50.00	5.10	1,311.29
0.00	5.30	1,311.09
50.00	6.00	1,310.39
88.00	6.35	1,310.04
146.00	15.50	1,300.89
150.00	15.70	1,300.69

STATION : 10+00.00
H.I. : 1316.39

OFFSET	ROD	ELEVATION
- 241.00	16.20	1,300.19
- 200.00	16.20	1,300.19
- 150.00	16.00	1,300.39
- 138.00	16.10	1,300.29
- 134.00	17.35	1,299.04
- 130.00	15.90	1,300.49
- 125.00	15.95	1,300.44
-71.00	5.25	1,311.14
-50.00	5.20	1,311.19
0.00	5.25	1,311.14
50.00	5.75	1,310.64
86.00	5.85	1,310.54
146.00	15.55	1,300.84
150.00	15.70	1,300.69

STATION : 10+50.00
H.I. : 1316.39

OFFSET	ROD	ELEVATION
- 242.00	16.05	1,300.34
- 200.00	16.25	1,300.14
- 150.00	15.95	1,300.44
- 138.00	15.80	1,300.59
- 133.00	17.40	1,298.99
- 127.00	15.70	1,300.69
- 123.00	15.75	1,300.64
-73.00	5.35	1,311.04
-50.00	5.30	1,311.09
0.00	5.30	1,311.09
50.00	5.55	1,310.84
85.00	5.70	1,310.69
145.00	15.20	1,301.19
150.00	15.55	1,300.84

STATION : 11+00.00
H.I. : 1316.39

OFFSET	ROD	ELEVATION
- 242.00	16.05	1,300.34
- 200.00	16.15	1,300.24
- 150.00	16.00	1,300.39
- 137.00	15.85	1,300.54
- 133.00	17.30	1,299.09
- 130.00	15.50	1,300.89
- 121.00	15.20	1,301.19
-73.00	5.35	1,311.04
-50.00	5.30	1,311.09
0.00	5.30	1,311.09
50.00	5.70	1,310.69
84.00	5.70	1,310.69
145.00	15.20	1,301.19
150.00	15.60	1,300.79

STATION : 11+50.00
H.I. : 1316.39

OFFSET	ROD	ELEVATION
- 242.00	16.15	1,300.24
- 200.00	16.20	1,300.19
- 150.00	16.10	1,300.29
- 138.00	15.60	1,300.79
- 133.00	17.70	1,298.69
- 129.00	15.90	1,300.49
- 122.00	15.45	1,300.94

-74.00	5.50	1,310.89
-50.00	5.40	1,310.99
0.00	5.60	1,310.79
50.00	5.60	1,310.79
83.00	5.50	1,310.89
145.00	15.45	1,300.94
150.00	15.80	1,300.59

STATION : 12+00.00
H.I. : 1316.39

OFFSET	ROD	ELEVATION
- 243.00	16.20	1,300.19
- 200.00	16.35	1,300.04
- 150.00	16.00	1,300.39
- 138.00	15.90	1,300.49
- 133.00	17.70	1,298.69
- 129.00	15.60	1,300.79
- 123.00	15.65	1,300.74
-75.00	5.60	1,310.79
-50.00	5.60	1,310.79
0.00	5.70	1,310.69
50.00	5.65	1,310.74
85.00	5.50	1,310.89
146.00	15.35	1,301.04
150.00	15.60	1,300.79

STATION : 12+50.00
H.I. : 1316.39

OFFSET	ROD	ELEVATION
- 245.00	16.30	1,300.09
- 200.00	16.30	1,300.09
- 150.00	16.30	1,300.09
- 137.00	15.70	1,300.69
- 133.00	17.60	1,298.79
- 128.00	15.80	1,300.59
- 123.00	15.50	1,300.89
-74.00	5.30	1,311.09
-50.00	5.60	1,310.79
0.00	5.75	1,310.64
50.00	5.70	1,310.69
85.00	5.70	1,310.69
146.00	15.15	1,301.24
150.00	15.50	1,300.89

STATION : 13+00.00
H.I. : 1316.39

OFFSET	ROD	ELEVATION
- 244.00	16.35	1,300.04
- 200.00	16.45	1,299.94
- 150.00	16.15	1,300.24
- 136.00	15.85	1,300.54
- 132.00	17.40	1,298.99
- 128.00	16.00	1,300.39
- 121.00	15.65	1,300.74
-75.00	5.20	1,311.19
-50.00	5.50	1,310.89
0.00	5.70	1,310.69
50.00	5.60	1,310.79
89.00	6.45	1,309.94
145.00	14.85	1,301.54
150.00	15.20	1,301.19

STATION : 13+50.00
H.I. : 1316.39

OFFSET	ROD	ELEVATION
- 250.00	15.85	1,300.54
- 200.00	15.70	1,300.69
- 150.00	15.30	1,301.09
- 138.00	17.25	1,299.14
- 129.00	16.15	1,300.24
- 121.00	15.50	1,300.89
-76.00	4.90	1,311.49
-50.00	5.50	1,310.89
0.00	5.80	1,310.59
50.00	5.85	1,310.54
91.00	6.60	1,309.79
145.00	15.20	1,301.19
150.00	15.45	1,300.94

STATION : 14+00.00
H.I. : 1316.39

OFFSET	ROD	ELEVATION
- 300.00	17.20	1,299.19
- 250.00	17.00	1,299.39
- 200.00	17.10	1,299.29
- 150.00	17.50	1,298.89
- 142.00	14.80	1,301.59
- 133.00	17.70	1,298.69
- 129.00	16.00	1,300.39
- 118.00	16.00	1,300.39

-76.00	5.40	1,310.99
-50.00	5.40	1,310.99
0.00	5.70	1,310.69
50.00	5.90	1,310.49
90.00	6.40	1,309.99
145.00	14.75	1,301.64
150.00	15.05	1,301.34

STATION : 14+50.00
H.I. : 1316.39

OFFSET	ROD	ELEVATION
- 250.00	17.10	1,299.29
- 200.00	16.90	1,299.49
- 150.00	17.70	1,298.69
- 144.00	15.00	1,301.39
- 133.00	17.60	1,298.79
- 130.00	16.60	1,299.79
- 111.00	16.00	1,300.39
-74.00	5.05	1,311.34
-50.00	5.50	1,310.89
0.00	5.60	1,310.79
50.00	6.05	1,310.34
94.00	6.60	1,309.79
147.00	15.65	1,300.74
150.00	15.85	1,300.54

STATION : 15+00.00
H.I. : 1316.39

OFFSET	ROD	ELEVATION
- 250.00	17.00	1,299.39
- 200.00	17.10	1,299.29
- 150.00	17.70	1,298.69
- 144.00	15.50	1,300.89
- 134.00	17.50	1,298.89
- 129.00	16.70	1,299.69
- 109.00	15.55	1,300.84
-75.00	5.50	1,310.89
-50.00	5.20	1,311.19
0.00	5.75	1,310.64
50.00	6.00	1,310.39
94.00	6.45	1,309.94
146.00	15.70	1,300.69
150.00	16.00	1,300.39

STATION : 15+50.00
H.I. : 1316.39

OFFSET	ROD	ELEVATION
- 250.00	17.05	1,299.34
- 200.00	17.05	1,299.34
- 152.00	17.80	1,298.59
- 145.00	14.40	1,301.99
- 135.00	18.00	1,298.39
- 131.00	16.60	1,299.79
- 108.00	15.20	1,301.19
-75.00	5.50	1,310.89
-50.00	5.45	1,310.94
0.00	5.65	1,310.74
50.00	6.00	1,310.39
94.00	6.50	1,309.89
147.00	16.00	1,300.39
150.00	16.20	1,300.19

STATION : 16+00.00
H.I. : 1316.39

OFFSET	ROD	ELEVATION
- 250.00	17.15	1,299.24
- 200.00	17.20	1,299.19
- 154.00	16.90	1,299.49
- 147.00	14.10	1,302.29
- 134.00	17.80	1,298.59
- 130.00	16.30	1,300.09
- 110.00	15.70	1,300.69
-75.00	5.90	1,310.49
-50.00	5.60	1,310.79
0.00	5.70	1,310.69
50.00	5.80	1,310.59
94.00	6.55	1,309.84
147.00	16.10	1,300.29
150.00	16.20	1,300.19

STATION : 16+50.00
H.I. : 1316.39

OFFSET	ROD	ELEVATION
- 250.00	17.10	1,299.29
- 200.00	17.00	1,299.39
- 150.00	17.00	1,299.39
- 145.00	14.40	1,301.99
- 134.00	18.00	1,298.39
- 130.00	16.80	1,299.59
- 112.00	15.60	1,300.79

-76.00	6.10	1,310.29
-50.00	5.80	1,310.59
0.00	5.90	1,310.49
50.00	5.90	1,310.49
93.00	6.60	1,309.79
146.00	16.10	1,300.29
150.00	16.40	1,299.99

STATION : 17+00.00
H.I. : 1316.39

OFFSET	ROD	ELEVATION
- 250.00	17.00	1,299.39
- 200.00	17.00	1,299.39
- 150.00	16.80	1,299.59
- 145.00	14.45	1,301.94
- 134.00	17.90	1,298.49
- 129.00	16.10	1,300.29
- 109.00	14.50	1,301.89
-74.00	5.40	1,310.99
-50.00	5.70	1,310.69
0.00	5.70	1,310.69
50.00	5.90	1,310.49
92.00	6.80	1,309.59
143.00	16.20	1,300.19
150.00	16.50	1,299.89

STATION : 17+50.00
H.I. : 1316.28

OFFSET	ROD	ELEVATION
- 250.00	16.70	1,299.58
- 200.00	16.70	1,299.58
- 150.00	17.10	1,299.18
- 118.00	15.90	1,300.38
- 111.00	15.25	1,301.03
-73.00	5.50	1,310.78
-50.00	5.30	1,310.98
0.00	5.30	1,310.98
50.00	5.50	1,310.78
95.00	7.00	1,309.28
140.00	15.20	1,301.08
150.00	16.50	1,299.78

STATION : 18+00.00
H.I. : 1316.28

OFFSET	ROD	ELEVATION
- 250.00	16.70	1,299.58
- 200.00	17.00	1,299.28
- 150.00	17.00	1,299.28
- 125.00	17.00	1,299.28
- 112.00	15.50	1,300.78
-73.00	5.90	1,310.38
-50.00	5.20	1,311.08
0.00	5.30	1,310.98
50.00	5.65	1,310.63
92.00	6.95	1,309.33
120.00	12.10	1,304.18
150.00	16.40	1,299.88

STATION : 18+50.00
H.I. : 1316.28

OFFSET	ROD	ELEVATION
- 250.00	17.00	1,299.28
- 200.00	17.00	1,299.28
- 150.00	16.80	1,299.48
- 126.00	17.15	1,299.13
- 115.00	15.60	1,300.68
-71.00	5.70	1,310.58
-50.00	5.20	1,311.08
0.00	5.40	1,310.88
50.00	5.90	1,310.38
94.00	7.50	1,308.78
118.00	12.10	1,304.18
150.00	16.15	1,300.13

STATION : 19+00.00
H.I. : 1316.28

OFFSET	ROD	ELEVATION
- 250.00	17.00	1,299.28
- 200.00	16.50	1,299.78
- 150.00	16.90	1,299.38
- 125.00	17.00	1,299.28
- 111.00	15.20	1,301.08
-70.00	5.50	1,310.78
-50.00	5.15	1,311.13
0.00	5.70	1,310.58
50.00	6.00	1,310.28
92.00	7.50	1,308.78
118.00	12.40	1,303.88

150.00	16.20	1,300.08

STATION : 19+50.00
H.I. : 1316.28

OFFSET	ROD	ELEVATION
- 250.00	17.00	1,299.28
- 200.00	16.60	1,299.68
- 150.00	17.10	1,299.18
- 125.00	17.00	1,299.28
- 111.00	15.30	1,300.98
-70.00	5.60	1,310.68
-50.00	5.20	1,311.08
0.00	5.70	1,310.58
50.00	6.10	1,310.18
92.00	7.30	1,308.98
119.00	12.65	1,303.63
150.00	16.45	1,299.83

STATION : 20+00.00
H.I. : 1315.73

OFFSET	ROD	ELEVATION
- 250.00	16.40	1,299.33
- 200.00	16.20	1,299.53
- 150.00	16.40	1,299.33
- 126.00	16.45	1,299.28
- 109.00	14.40	1,301.33
-72.00	5.45	1,310.28
-50.00	4.75	1,310.98
0.00	5.25	1,310.48
50.00	5.70	1,310.03
90.00	7.00	1,308.73
122.00	12.45	1,303.28
150.00	15.80	1,299.93

STATION : 20+50.00
H.I. : 1315.73

OFFSET	ROD	ELEVATION
- 250.00	16.40	1,299.33
- 200.00	16.20	1,299.53
- 150.00	16.40	1,299.33
- 128.00	16.30	1,299.43
- 115.00	15.10	1,300.63
-71.00	5.10	1,310.63
-50.00	5.10	1,310.63

0.00	5.30	1,310.43
50.00	5.70	1,310.03
91.00	6.85	1,308.88
137.00	14.80	1,300.93
150.00	15.90	1,299.83

STATION : 21+00.00
H.I. : 1315.73

OFFSET	ROD	ELEVATION
- 250.00	16.20	1,299.53
- 200.00	16.30	1,299.43
- 150.00	16.20	1,299.53
- 128.00	16.20	1,299.53
- 114.00	15.00	1,300.73
-71.00	5.50	1,310.23
-50.00	5.20	1,310.53
0.00	5.55	1,310.18
50.00	5.70	1,310.03
90.00	6.90	1,308.83
118.00	12.10	1,303.63
140.00	15.20	1,300.53
150.00	16.00	1,299.73

STATION : 21+50.00
H.I. : 1315.73

OFFSET	ROD	ELEVATION
- 250.00	16.20	1,299.53
- 200.00	16.00	1,299.73
- 150.00	16.30	1,299.43
- 127.00	16.40	1,299.33
- 108.00	13.90	1,301.83
-71.00	5.60	1,310.13
-50.00	5.30	1,310.43
0.00	5.65	1,310.08
50.00	5.90	1,309.83
91.00	5.95	1,309.78
121.00	12.80	1,302.93
139.00	15.20	1,300.53
150.00	15.90	1,299.83

STATION : 22+00.00
H.I. : 1315.73

OFFSET	ROD	ELEVATION
- 250.00	16.10	1,299.63
- 200.00	16.30	1,299.43
- 150.00	16.35	1,299.38
- 126.00	16.40	1,299.33
- 110.00	14.50	1,301.23
-72.00	5.50	1,310.23
-50.00	5.35	1,310.38
0.00	5.60	1,310.13
50.00	6.00	1,309.73
91.00	7.20	1,308.53
127.00	13.80	1,301.93
140.00	14.80	1,300.93
150.00	15.20	1,300.53

STATION : 22+50.00
H.I. : 1315.73

OFFSET	ROD	ELEVATION
- 250.00	16.30	1,299.43
- 200.00	16.40	1,299.33
- 150.00	16.40	1,299.33
- 127.00	16.10	1,299.63
- 110.00	14.60	1,301.13
-70.00	6.00	1,309.73
-50.00	5.60	1,310.13
0.00	5.65	1,310.08
50.00	6.10	1,309.63
90.00	7.65	1,308.08
127.00	13.50	1,302.23
140.00	14.45	1,301.28
150.00	15.00	1,300.73

STATION : 23+00.00
H.I. : 1315.73

OFFSET	ROD	ELEVATION
- 250.00	16.25	1,299.48
- 200.00	16.35	1,299.38
- 150.00	16.40	1,299.33
- 126.00	16.30	1,299.43
- 106.00	13.70	1,302.03
- 100.00	11.45	1,304.28
-87.00	9.50	1,306.23
-72.00	6.10	1,309.63
-50.00	5.80	1,309.93

0.00	5.70	1,310.03
50.00	5.75	1,309.98
91.00	7.30	1,308.43
129.00	14.00	1,301.73
150.00	15.35	1,300.38

STATION : 23+50.00
H.I. : 1315.73

OFFSET	ROD	ELEVATION
- 250.00	16.20	1,299.53
- 200.00	16.20	1,299.53
- 150.00	15.80	1,299.93
- 127.00	16.25	1,299.48
- 113.00	15.10	1,300.63
- 100.00	11.15	1,304.58
-88.00	9.45	1,306.28
-75.00	6.70	1,309.03
-50.00	6.00	1,309.73
0.00	5.90	1,309.83
50.00	6.70	1,309.03
98.00	8.80	1,306.93
129.00	14.00	1,301.73
150.00	15.15	1,300.58

STATION : 24+00.00
H.I. : 1315.73

OFFSET	ROD	ELEVATION
- 250.00	16.25	1,299.48
- 200.00	16.10	1,299.63
- 150.00	15.90	1,299.83
- 128.00	15.75	1,299.98
- 116.00	15.10	1,300.63
- 105.00	12.15	1,303.58
-85.00	9.40	1,306.33
-50.00	8.10	1,307.63
0.00	8.15	1,307.58
50.00	8.80	1,306.93
112.00	11.00	1,304.73
130.00	13.80	1,301.93
150.00	15.15	1,300.58

STATION : 24+50.00
H.I. : 1315.73

OFFSET	ROD	ELEVATION
- 250.00	16.15	1,299.58
- 200.00	16.20	1,299.53
- 150.00	15.70	1,300.03
- 127.00	16.30	1,299.43
- 120.00	16.00	1,299.73
- 108.00	13.00	1,302.73
-50.00	12.00	1,303.73
0.00	11.80	1,303.93
50.00	11.30	1,304.43
100.00	12.70	1,303.03
124.00	13.15	1,302.58
140.00	14.50	1,301.23
150.00	15.00	1,300.73

STATION : 25+00.00
H.I. : 1306.74

OFFSET	ROD	ELEVATION
- 250.00	7.15	1,299.59
- 200.00	7.15	1,299.59
- 150.00	6.80	1,299.94
- 123.00	7.20	1,299.54
- 113.00	5.05	1,301.69
- 100.00	4.75	1,301.99
-50.00	5.00	1,301.74
0.00	4.90	1,301.84
0.00	4.90	1,301.84
50.00	4.70	1,302.04
100.00	5.05	1,301.69
131.00	5.00	1,301.74
140.00	5.60	1,301.14
150.00	5.85	1,300.89

STATION : 25+50.00
H.I. : 1306.74

OFFSET	ROD	ELEVATION
- 250.00	7.10	1,299.64
- 200.00	7.05	1,299.69
- 150.00	7.05	1,299.69
- 120.00	7.15	1,299.59
- 112.00	5.10	1,301.64
- 100.00	5.25	1,301.49
-50.00	5.65	1,301.09
0.00	5.95	1,300.79

50.00	6.20	1,300.54
100.00	5.90	1,300.84
150.00	5.90	1,300.84

STATION : 26+00.00
H.I. : 1306.74

OFFSET	ROD	ELEVATION
- 250.00	6.90	1,299.84
- 200.00	6.85	1,299.89
- 150.00	6.90	1,299.84
- 117.00	7.40	1,299.34
- 109.00	5.50	1,301.24
- 100.00	5.50	1,301.24
-50.00	6.00	1,300.74
0.00	6.00	1,300.74
50.00	6.40	1,300.34
100.00	6.10	1,300.64

STATION : 26+16.00
H.I. : 1306.74

OFFSET	ROD	ELEVATION
- 250.00	6.90	1,299.84
- 200.00	6.90	1,299.84
- 150.00	6.90	1,299.84
- 100.00	6.50	1,300.24
-50.00	6.30	1,300.44
0.00	6.60	1,300.14
50.00	6.70	1,300.04
100.00	6.50	1,300.24

STATION : 26+59.00
H.I. : 1306.74

OFFSET	ROD	ELEVATION
- 700.00	6.40	1,300.34
- 600.00	6.10	1,300.64
- 500.00	6.20	1,300.54
- 400.00	6.50	1,300.24
- 300.00	6.10	1,300.64
- 200.00	6.50	1,300.24
- 100.00	7.00	1,299.74
0.00	6.00	1,300.74
50.00	5.90	1,300.84
100.00	5.90	1,300.84

STATION : 27+00.00
H.I. : 1307.57

OFFSET	ROD	ELEVATION
- 798.00	6.00	1,301.57
- 784.00	7.20	1,300.37
- 779.00	6.20	1,301.37
- 750.00	6.00	1,301.57
- 700.00	5.60	1,301.97
- 650.00	4.90	1,302.67
- 600.00	4.90	1,302.67
- 550.00	5.15	1,302.42
- 500.00	5.20	1,302.37
- 450.00	5.70	1,301.87
- 400.00	5.70	1,301.87
- 350.00	6.00	1,301.57
- 300.00	5.90	1,301.67
- 250.00	6.40	1,301.17
- 200.00	6.60	1,300.97
- 150.00	6.90	1,300.67
- 100.00	7.20	1,300.37
-50.00	6.90	1,300.67
0.00	6.75	1,300.82
50.00	6.60	1,300.97
100.00	6.60	1,300.97
150.00	6.55	1,301.02

STATION : 28+00.00
H.I. : 1307.57

OFFSET	ROD	ELEVATION
- 799.00	6.00	1,301.57
- 786.00	7.20	1,300.37
- 780.00	6.30	1,301.27
- 750.00	5.80	1,301.77
- 700.00	5.70	1,301.87
- 650.00	5.40	1,302.17
- 600.00	5.60	1,301.97
- 550.00	5.60	1,301.97
- 500.00	5.70	1,301.87
- 450.00	5.90	1,301.67
- 400.00	5.70	1,301.87
- 350.00	6.10	1,301.47
- 300.00	6.60	1,300.97
- 250.00	5.90	1,301.67
- 200.00	5.60	1,301.97
- 150.00	5.80	1,301.77
- 100.00	6.30	1,301.27
-50.00	6.60	1,300.97
0.00	6.60	1,300.97
50.00	6.60	1,300.97
100.00	6.80	1,300.77

150.00	6.80	1,300.77

STATION : 29+00.00
H.I. : 1307.57

OFFSET	ROD	ELEVATION
- 800.00	5.60	1,301.97
- 789.00	7.20	1,300.37
- 782.00	6.20	1,301.37
- 750.00	6.20	1,301.37
- 700.00	6.10	1,301.47
- 650.00	5.70	1,301.87
- 600.00	5.60	1,301.97
- 550.00	5.70	1,301.87
- 500.00	5.80	1,301.77
- 450.00	5.90	1,301.67
- 400.00	5.90	1,301.67
- 350.00	5.60	1,301.97
- 300.00	5.70	1,301.87
- 250.00	5.40	1,302.17
- 200.00	5.80	1,301.77
- 150.00	5.80	1,301.77
- 100.00	6.30	1,301.27
-50.00	6.60	1,300.97
0.00	6.50	1,301.07
50.00	6.90	1,300.67
100.00	6.70	1,300.87
150.00	6.80	1,300.77

STATION : 30+00.00
H.I. : 1307.57

OFFSET	ROD	ELEVATION
- 802.00	5.70	1,301.87
- 790.00	7.50	1,300.07
- 785.00	6.20	1,301.37
- 750.00	6.40	1,301.17
- 700.00	6.60	1,300.97
- 650.00	6.30	1,301.27
- 600.00	6.00	1,301.57
- 550.00	6.40	1,301.17
- 500.00	6.50	1,301.07
- 450.00	6.10	1,301.47
- 400.00	6.30	1,301.27
- 350.00	5.90	1,301.67
- 300.00	5.90	1,301.67
- 250.00	5.70	1,301.87
- 200.00	5.80	1,301.77
- 150.00	5.50	1,302.07
- 100.00	6.30	1,301.27

-50.00	6.20	1,301.37
0.00	6.40	1,301.17
50.00	6.60	1,300.97
100.00	6.60	1,300.97
150.00	7.40	1,300.17

STATION : 31+00.00
H.I. : 1307.57

OFFSET	ROD	ELEVATION
- 804.00	6.20	1,301.37
- 791.00	7.80	1,299.77
- 789.00	6.70	1,300.87
- 750.00	6.30	1,301.27
- 700.00	6.10	1,301.47
- 650.00	6.40	1,301.17
- 600.00	6.10	1,301.47
- 550.00	5.90	1,301.67
- 500.00	6.10	1,301.47
- 450.00	6.40	1,301.17
- 400.00	6.30	1,301.27
- 350.00	6.40	1,301.17
- 300.00	6.00	1,301.57
- 250.00	5.90	1,301.67
- 200.00	6.00	1,301.57
- 150.00	5.90	1,301.67
- 100.00	5.70	1,301.87
-50.00	5.70	1,301.87
0.00	6.00	1,301.57
50.00	6.20	1,301.37
100.00	6.80	1,300.77
150.00	7.60	1,299.97

STATION : 32+00.00
H.I. : 1307.57

OFFSET	ROD	ELEVATION
- 805.00	5.90	1,301.67
- 792.00	7.50	1,300.07
- 789.00	6.40	1,301.17
- 750.00	6.70	1,300.87
- 700.00	6.30	1,301.27
- 650.00	6.10	1,301.47
- 600.00	6.20	1,301.37
- 550.00	6.50	1,301.07
- 500.00	6.40	1,301.17
- 450.00	6.30	1,301.27
- 400.00	6.00	1,301.57
- 350.00	5.90	1,301.67
- 300.00	5.50	1,302.07

- 250.00	5.50	1,302.07
- 200.00	5.50	1,302.07
- 150.00	5.60	1,301.97
- 100.00	5.90	1,301.67
-50.00	5.90	1,301.67
0.00	6.10	1,301.47
50.00	6.10	1,301.47
100.00	6.90	1,300.67
150.00	7.40	1,300.17

STATION : 33+00.00
H.I. : 1306.55

OFFSET	ROD	ELEVATION
- 807.00	4.80	1,301.75
- 793.00	6.50	1,300.05
- 788.00	5.30	1,301.25
- 750.00	5.40	1,301.15
- 700.00	5.20	1,301.35
- 650.00	5.30	1,301.25
- 600.00	5.40	1,301.15
- 550.00	5.60	1,300.95
- 500.00	5.50	1,301.05
- 450.00	5.20	1,301.35
- 400.00	5.30	1,301.25
- 350.00	5.60	1,300.95
- 300.00	5.50	1,301.05
- 250.00	5.40	1,301.15
- 200.00	4.90	1,301.65
- 150.00	4.70	1,301.85
- 100.00	5.10	1,301.45
-50.00	5.20	1,301.35
0.00	5.40	1,301.15
50.00	5.40	1,301.15
100.00	5.80	1,300.75
150.00	6.50	1,300.05

STATION : 34+00.00
H.I. : 1306.55

OFFSET	ROD	ELEVATION
- 808.00	4.50	1,302.05
- 795.00	5.90	1,300.65
- 790.00	5.00	1,301.55
- 750.00	4.70	1,301.85
- 700.00	4.60	1,301.95
- 650.00	4.90	1,301.65
- 600.00	4.90	1,301.65
- 550.00	5.00	1,301.55
- 500.00	5.00	1,301.55

- 450.00	4.90	1,301.65
- 400.00	4.80	1,301.75
- 350.00	5.10	1,301.45
- 300.00	5.10	1,301.45
- 250.00	5.30	1,301.25
- 200.00	5.30	1,301.25
- 150.00	5.00	1,301.55
- 100.00	5.20	1,301.35
-50.00	5.30	1,301.25
0.00	5.50	1,301.05
50.00	5.40	1,301.15
100.00	6.60	1,299.95
150.00	6.80	1,299.75

STATION : 35+00.00
H.I. : 1306.55

OFFSET	ROD	ELEVATION
- 809.00	4.55	1,302.00
- 796.00	6.20	1,300.35
- 793.00	4.85	1,301.70
- 750.00	4.70	1,301.85
- 700.00	4.70	1,301.85
- 650.00	4.60	1,301.95
- 600.00	4.60	1,301.95
- 550.00	4.70	1,301.85
- 500.00	4.80	1,301.75
- 450.00	4.70	1,301.85
- 400.00	4.60	1,301.95
- 350.00	5.10	1,301.45
- 300.00	5.10	1,301.45
- 250.00	5.10	1,301.45
- 200.00	5.30	1,301.25
- 150.00	5.10	1,301.45
- 100.00	4.90	1,301.65
-50.00	5.10	1,301.45
0.00	5.15	1,301.40
50.00	5.40	1,301.15
100.00	6.50	1,300.05
150.00	6.90	1,299.65

STATION : 36+00.00
H.I. : 1306.55

OFFSET	ROD	ELEVATION
- 811.00	4.30	1,302.25
- 797.00	5.90	1,300.65
- 793.00	4.75	1,301.80
- 750.00	4.60	1,301.95
- 700.00	4.70	1,301.85

- 650.00	4.90	1,301.65
- 600.00	4.90	1,301.65
- 550.00	5.00	1,301.55
- 500.00	5.00	1,301.55
- 450.00	4.90	1,301.65
- 400.00	4.90	1,301.65
- 350.00	5.00	1,301.55
- 300.00	5.00	1,301.55
- 250.00	5.10	1,301.45
- 200.00	4.90	1,301.65
- 150.00	5.00	1,301.55
- 100.00	4.80	1,301.75
-50.00	4.50	1,302.05
0.00	4.85	1,301.70
50.00	5.55	1,301.00
100.00	6.50	1,300.05
150.00	7.20	1,299.35

STATION : 37+00.00
H.I. : 1306.55

OFFSET	ROD	ELEVATION
- 812.00	4.00	1,302.55
- 793.00	4.85	1,301.70
- 789.00	5.70	1,300.85
- 750.00	4.70	1,301.85
- 700.00	4.70	1,301.85
- 650.00	4.50	1,302.05
- 600.00	4.30	1,302.25
- 550.00	4.70	1,301.85
- 500.00	4.75	1,301.80
- 450.00	4.30	1,302.25
- 400.00	4.20	1,302.35
- 350.00	4.25	1,302.30
- 300.00	4.50	1,302.05
- 250.00	4.20	1,302.35
- 200.00	4.60	1,301.95
- 150.00	5.20	1,301.35
- 100.00	5.10	1,301.45
-50.00	4.90	1,301.65
0.00	5.40	1,301.15
50.00	5.80	1,300.75
100.00	6.50	1,300.05
150.00	7.20	1,299.35

STATION : 38+00.00
H.I. : 1306.55

OFFSET	ROD	ELEVATION
- 812.00	4.00	1,302.55
- 800.00	5.60	1,300.95
- 796.00	4.60	1,301.95
- 750.00	4.80	1,301.75
- 700.00	4.85	1,301.70
- 650.00	5.15	1,301.40
- 600.00	5.25	1,301.30
- 550.00	5.70	1,300.85
- 500.00	5.60	1,300.95
- 450.00	5.40	1,301.15
- 400.00	5.00	1,301.55
- 350.00	5.30	1,301.25
- 300.00	4.80	1,301.75
- 250.00	4.60	1,301.95
- 200.00	4.85	1,301.70
- 150.00	4.90	1,301.65
- 100.00	5.00	1,301.55
-50.00	5.40	1,301.15
0.00	5.80	1,300.75
50.00	5.35	1,301.20
100.00	6.40	1,300.15
150.00	6.90	1,299.65

STATION : 39+00.00
H.I. : 1308.52

OFFSET	ROD	ELEVATION
- 813.00	5.20	1,303.32
- 802.00	7.10	1,301.42
- 799.00	6.60	1,301.92
- 750.00	6.60	1,301.92
- 700.00	6.85	1,301.67
- 650.00	6.80	1,301.72
- 600.00	7.00	1,301.52
- 550.00	7.10	1,301.42
- 500.00	7.40	1,301.12
- 450.00	7.40	1,301.12
- 400.00	7.40	1,301.12
- 350.00	5.90	1,302.62
- 300.00	5.70	1,302.82
- 250.00	6.25	1,302.27
- 200.00	6.20	1,302.32
- 150.00	6.60	1,301.92
- 100.00	6.90	1,301.62
-50.00	7.15	1,301.37
0.00	7.40	1,301.12
50.00	6.80	1,301.72
100.00	7.90	1,300.62

150.00	8.80	1,299.72
179.00	9.00	1,299.52

STATION : 40+00.00
H.I. : 1308.52

OFFSET	ROD	ELEVATION
- 814.00	5.20	1,303.32
- 804.00	7.00	1,301.52
- 801.00	6.30	1,302.22
- 750.00	6.30	1,302.22
- 700.00	6.40	1,302.12
- 650.00	6.60	1,301.92
- 600.00	6.70	1,301.82
- 550.00	6.70	1,301.82
- 500.00	7.00	1,301.52
- 450.00	7.10	1,301.42
- 400.00	6.90	1,301.62
- 350.00	6.80	1,301.72
- 300.00	5.50	1,303.02
- 250.00	5.75	1,302.77
- 200.00	6.00	1,302.52
- 150.00	6.10	1,302.42
- 100.00	6.25	1,302.27
-50.00	6.40	1,302.12
0.00	6.50	1,302.02
50.00	6.30	1,302.22
100.00	6.90	1,301.62
150.00	8.00	1,300.52
200.00	8.60	1,299.92
205.00	8.60	1,299.92

STATION : 41+00.00
H.I. : 1308.52

OFFSET	ROD	ELEVATION
- 815.00	4.80	1,303.72
- 805.00	6.70	1,301.82
- 803.00	6.00	1,302.52
- 750.00	6.20	1,302.32
- 700.00	6.40	1,302.12
- 650.00	6.40	1,302.12
- 600.00	6.35	1,302.17
- 550.00	6.10	1,302.42
- 500.00	6.80	1,301.72
- 450.00	6.85	1,301.67
- 400.00	6.85	1,301.67
- 350.00	6.80	1,301.72
- 300.00	6.40	1,302.12
- 250.00	6.00	1,302.52

- 200.00	6.10	1,302.42
- 150.00	6.00	1,302.52
- 100.00	6.30	1,302.22
-50.00	6.35	1,302.17
0.00	6.15	1,302.37
50.00	5.90	1,302.62
100.00	5.90	1,302.62
150.00	7.60	1,300.92
200.00	8.20	1,300.32
230.00	9.00	1,299.52

STATION : 42+00.00
H.I. : 1308.52

OFFSET	ROD	ELEVATION
- 816.00	4.30	1,304.22
- 802.00	5.50	1,303.02
- 750.00	5.50	1,303.02
- 700.00	5.60	1,302.92
- 650.00	5.90	1,302.62
- 600.00	6.30	1,302.22
- 550.00	5.90	1,302.62
- 500.00	6.10	1,302.42
- 450.00	6.30	1,302.22
- 400.00	6.40	1,302.12
- 350.00	6.30	1,302.22
- 300.00	6.10	1,302.42
- 250.00	5.70	1,302.82
- 200.00	5.60	1,302.92
- 150.00	5.80	1,302.72
- 100.00	6.00	1,302.52
-50.00	5.90	1,302.62
-8.50	6.40	1,302.12
0.00	6.00	1,302.52
50.00	5.85	1,302.67
100.00	5.65	1,302.87
150.00	5.85	1,302.67
200.00	7.15	1,301.37
250.00	8.25	1,300.27
295.00	9.05	1,299.47

STATION : 43+00.00
H.I. : 1308.52

OFFSET	ROD	ELEVATION
- 817.00	4.00	1,304.52
- 805.00	5.90	1,302.62
- 800.00	5.20	1,303.32
- 750.00	5.00	1,303.52
- 700.00	4.90	1,303.62

- 650.00	5.20	1,303.32
- 600.00	5.20	1,303.32
- 550.00	5.00	1,303.52
- 500.00	4.90	1,303.62
- 450.00	4.90	1,303.62
- 400.00	4.70	1,303.82
- 350.00	4.90	1,303.62
- 300.00	4.60	1,303.92
- 250.00	4.60	1,303.92
- 200.00	4.40	1,304.12
- 150.00	4.15	1,304.37
- 100.00	4.20	1,304.32
-50.00	4.50	1,304.02
0.00	4.80	1,303.72
50.00	5.54	1,302.98
100.00	5.74	1,302.78
150.00	5.54	1,302.98
200.00	5.74	1,302.78
250.00	7.64	1,300.88
300.00	8.24	1,300.28
322.00	8.64	1,299.88

STATION : 44+00.00
H.I. : 1308.52

OFFSET	ROD	ELEVATION
- 817.00	3.80	1,304.72
- 806.00	5.30	1,303.22
- 800.00	4.35	1,304.17
- 750.00	3.25	1,305.27
- 700.00	3.35	1,305.17
- 650.00	3.00	1,305.52
- 600.00	3.50	1,305.02
- 550.00	3.60	1,304.92
- 500.00	3.70	1,304.82
- 450.00	3.60	1,304.92
- 400.00	3.90	1,304.62
- 350.00	3.80	1,304.72
- 300.00	3.70	1,304.82
- 250.00	3.70	1,304.82
- 200.00	4.10	1,304.42
- 150.00	4.30	1,304.22
- 100.00	4.60	1,303.92
-50.00	4.80	1,303.72
0.00	5.10	1,303.42
50.00	4.94	1,303.58
100.00	5.34	1,303.18
150.00	5.69	1,302.83
200.00	6.64	1,301.88
250.00	5.64	1,302.88
300.00	6.34	1,302.18
350.00	8.04	1,300.48
384.00	8.84	1,299.68

STATION : 45+00.00
H.I. : 1310.6

OFFSET	ROD	ELEVATION
- 818.00	5.00	1,305.60
- 806.00	7.00	1,303.60
- 801.00	6.00	1,304.60
- 750.00	5.50	1,305.10
- 700.00	5.50	1,305.10
- 650.00	6.00	1,304.60
- 600.00	6.20	1,304.40
- 550.00	6.30	1,304.30
- 500.00	6.35	1,304.25
- 450.00	6.40	1,304.20
- 400.00	6.35	1,304.25
- 350.00	6.65	1,303.95
- 300.00	6.65	1,303.95
- 250.00	6.60	1,304.00
- 200.00	6.80	1,303.80
- 150.00	7.00	1,303.60
- 100.00	6.65	1,303.95
-50.00	7.10	1,303.50
0.00	6.90	1,303.70
50.00	6.97	1,303.63
100.00	7.17	1,303.43
150.00	7.62	1,302.98
200.00	7.67	1,302.93
250.00	8.07	1,302.53
300.00	8.02	1,302.58
350.00	8.82	1,301.78
400.00	10.07	1,300.53
446.00	10.87	1,299.73

STATION : 46+00.00
H.I. : 1310.6

OFFSET	ROD	ELEVATION
- 820.00	4.60	1,306.00
- 806.00	6.50	1,304.10
- 800.00	5.80	1,304.80
- 750.00	5.60	1,305.00
- 700.00	5.65	1,304.95
- 650.00	5.20	1,305.40
- 600.00	5.50	1,305.10
- 550.00	5.50	1,305.10
- 500.00	5.50	1,305.10
- 450.00	5.30	1,305.30
- 400.00	5.30	1,305.30
- 350.00	5.90	1,304.70

- 300.00	6.20	1,304.40
- 250.00	6.30	1,304.30
- 200.00	6.25	1,304.35
- 150.00	6.10	1,304.50
- 100.00	6.40	1,304.20
-50.00	6.40	1,304.20
0.00	6.40	1,304.20
50.00	6.40	1,304.20
100.00	6.40	1,304.20
150.00	6.80	1,303.80
200.00	7.10	1,303.50
250.00	7.30	1,303.30
300.00	7.60	1,303.00
350.00	7.50	1,303.10
400.00	8.20	1,302.40
450.00	10.20	1,300.40
500.00	10.90	1,299.70

STATION : 47+00.00
H.I. : 1310.6

OFFSET	ROD	ELEVATION
- 821.00	4.30	1,306.30
- 806.00	5.90	1,304.70
- 800.00	4.90	1,305.70
- 750.00	5.05	1,305.55
- 700.00	5.00	1,305.60
- 600.00	5.00	1,305.60
- 550.00	5.15	1,305.45
- 500.00	5.30	1,305.30
- 450.00	5.20	1,305.40
- 400.00	5.20	1,305.40
- 350.00	5.40	1,305.20
- 300.00	5.50	1,305.10
- 250.00	5.50	1,305.10
- 200.00	5.60	1,305.00
- 150.00	5.75	1,304.85
- 100.00	6.10	1,304.50
0.00	6.15	1,304.45
50.00	6.20	1,304.40
50.00	6.30	1,304.30
100.00	7.00	1,303.60
150.00	7.20	1,303.40
200.00	7.30	1,303.30
250.00	7.10	1,303.50
300.00	7.00	1,303.60
350.00	7.70	1,302.90
400.00	7.30	1,303.30
450.00	8.00	1,302.60
500.00	8.50	1,302.10
550.00	10.35	1,300.25
569.00	11.00	1,299.60
650.00	4.85	1,305.75

STATION : 48+00.00
H.I. : 1310.6

OFFSET	ROD	ELEVATION
- 821.00	3.60	1,307.00
- 806.00	5.50	1,305.10
- 800.00	4.80	1,305.80
- 750.00	4.10	1,306.50
- 700.00	4.30	1,306.30
- 650.00	4.40	1,306.20
- 600.00	4.80	1,305.80
- 550.00	4.90	1,305.70
- 500.00	5.20	1,305.40
- 450.00	5.20	1,305.40
- 400.00	5.00	1,305.60
- 350.00	5.40	1,305.20
- 300.00	5.90	1,304.70
- 250.00	6.10	1,304.50
- 200.00	6.15	1,304.45
- 150.00	6.35	1,304.25
- 100.00	6.40	1,304.20
-50.00	6.50	1,304.10
0.00	6.55	1,304.05
50.00	6.40	1,304.20
100.00	6.25	1,304.35
150.00	6.20	1,304.40
200.00	6.10	1,304.50
250.00	6.10	1,304.50
300.00	6.80	1,303.80
350.00	7.10	1,303.50
400.00	7.25	1,303.35
450.00	6.90	1,303.70
500.00	7.80	1,302.80
550.00	8.30	1,302.30
600.00	10.30	1,300.30
615.00	11.05	1,299.55

STATION : 49+00.00
H.I. : 1310.6

OFFSET	ROD	ELEVATION
- 822.00	3.40	1,307.20
- 806.00	5.50	1,305.10
- 802.00	4.45	1,306.15
- 750.00	4.50	1,306.10
- 700.00	4.65	1,305.95
- 650.00	4.50	1,306.10
- 600.00	4.90	1,305.70
- 550.00	4.80	1,305.80

- 500.00	5.20	1,305.40
- 450.00	5.30	1,305.30
- 400.00	5.40	1,305.20
- 350.00	5.75	1,304.85
- 300.00	5.80	1,304.80
- 250.00	6.00	1,304.60
- 200.00	6.15	1,304.45
- 150.00	6.35	1,304.25
- 100.00	6.30	1,304.30
-50.00	6.30	1,304.30
0.00	6.10	1,304.50
50.00	5.92	1,304.68
100.00	5.82	1,304.78
150.00	5.72	1,304.88
200.00	5.77	1,304.83
250.00	6.12	1,304.48
300.00	6.32	1,304.28
350.00	6.62	1,303.98
400.00	6.52	1,304.08
450.00	6.22	1,304.38
500.00	6.62	1,303.98
550.00	7.42	1,303.18
600.00	7.42	1,303.18
650.00	8.42	1,302.18
700.00	10.42	1,300.18
708.00	10.72	1,299.88

STATION : 50+00.00
H.I. : 1311.53

OFFSET	ROD	ELEVATION
- 825.00	4.10	1,307.43
- 808.00	6.20	1,305.33
- 801.00	5.00	1,306.53
- 750.00	4.60	1,306.93
- 700.00	5.20	1,306.33
- 650.00	5.10	1,306.43
- 600.00	5.25	1,306.28
- 550.00	5.45	1,306.08
- 500.00	5.55	1,305.98
- 450.00	5.80	1,305.73
- 400.00	5.90	1,305.63
- 350.00	5.90	1,305.63
- 300.00	6.20	1,305.33
- 250.00	6.35	1,305.18
- 200.00	6.60	1,304.93
- 150.00	6.40	1,305.13
- 100.00	6.70	1,304.83
-50.00	7.00	1,304.53
0.00	6.60	1,304.93
50.00	6.35	1,305.18
100.00	6.55	1,304.98
150.00	6.45	1,305.08

200.00	6.35	1,305.18
250.00	6.55	1,304.98
300.00	6.75	1,304.78
350.00	7.05	1,304.48
400.00	6.95	1,304.58
450.00	7.45	1,304.08
500.00	7.75	1,303.78
550.00	8.05	1,303.48
600.00	8.45	1,303.08
650.00	9.25	1,302.28
700.00	9.95	1,301.58
750.00	10.05	1,301.48
770.00	11.15	1,300.38

STATION : 51+00.00
H.I. : 1311.53

OFFSET	ROD	ELEVATION
- 828.00	3.40	1,308.13
- 810.00	5.50	1,306.03
- 800.00	3.80	1,307.73
- 750.00	4.00	1,307.53
- 700.00	4.10	1,307.43
- 650.00	4.00	1,307.53
- 600.00	4.05	1,307.48
- 550.00	4.45	1,307.08
- 500.00	4.80	1,306.73
- 450.00	4.90	1,306.63
- 400.00	5.00	1,306.53
- 350.00	5.30	1,306.23
- 300.00	5.75	1,305.78
- 250.00	5.70	1,305.83
- 200.00	5.90	1,305.63
- 150.00	5.95	1,305.58
- 100.00	6.25	1,305.28
-50.00	6.00	1,305.53
0.00	6.35	1,305.18
50.00	6.60	1,304.93
100.00	6.55	1,304.98
150.00	6.65	1,304.88
200.00	6.55	1,304.98
250.00	6.65	1,304.88
300.00	6.95	1,304.58
350.00	7.35	1,304.18
400.00	7.35	1,304.18
450.00	7.65	1,303.88
500.00	7.85	1,303.68
550.00	8.25	1,303.28
600.00	8.75	1,302.78
650.00	9.05	1,302.48
700.00	9.45	1,302.08
750.00	10.15	1,301.38
800.00	10.75	1,300.78

841.00	11.20	1,300.33

STATION : 52+00.00
H.I. : 1311.53

OFFSET	ROD	ELEVATION
- 828.00	3.30	1,308.23
- 809.00	4.90	1,306.63
- 800.00	3.50	1,308.03
- 750.00	3.30	1,308.23
- 700.00	3.50	1,308.03
- 650.00	3.85	1,307.68
- 600.00	3.90	1,307.63
- 550.00	3.85	1,307.68
- 500.00	4.45	1,307.08
- 450.00	4.30	1,307.23
- 400.00	4.50	1,307.03
- 350.00	5.05	1,306.48
- 300.00	5.30	1,306.23
- 250.00	5.60	1,305.93
- 200.00	5.90	1,305.63
- 150.00	6.05	1,305.48
- 100.00	6.00	1,305.53
-50.00	6.30	1,305.23
0.00	6.55	1,304.98
50.00	6.75	1,304.78
100.00	6.55	1,304.98
150.00	6.75	1,304.78
200.00	6.75	1,304.78
250.00	6.85	1,304.68
300.00	7.15	1,304.38
350.00	7.45	1,304.08
400.00	7.65	1,303.88
450.00	8.35	1,303.18
500.00	8.95	1,302.58
550.00	9.75	1,301.78
600.00	10.25	1,301.28
650.00	10.25	1,301.28
700.00	10.25	1,301.28
750.00	9.75	1,301.78
800.00	10.05	1,301.48
850.00	10.45	1,301.08

STATION : 52+25.00
H.I. : 1311.53

OFFSET	ROD	ELEVATION
- 800.00	3.50	1,308.03
- 750.00	3.55	1,307.98
- 700.00	4.20	1,307.33

- 650.00	4.10	1,307.43
- 600.00	4.30	1,307.23
- 550.00	4.80	1,306.73
- 500.00	5.20	1,306.33
- 450.00	5.30	1,306.23
- 400.00	5.00	1,306.53
- 350.00	5.60	1,305.93
- 300.00	6.00	1,305.53
- 250.00	6.10	1,305.43
- 200.00	6.20	1,305.33
- 150.00	6.40	1,305.13
- 100.00	6.45	1,305.08
-50.00	6.60	1,304.93
0.00	6.90	1,304.63
50.00	7.25	1,304.28
100.00	7.25	1,304.28
150.00	7.55	1,303.98
200.00	7.65	1,303.88
250.00	7.65	1,303.88
300.00	7.45	1,304.08
350.00	7.65	1,303.88
400.00	8.05	1,303.48
450.00	8.75	1,302.78
500.00	9.35	1,302.18
550.00	9.85	1,301.68
600.00	10.25	1,301.28
650.00	10.15	1,301.38
700.00	10.55	1,300.98
750.00	10.55	1,300.98
800.00	10.85	1,300.68
850.00	10.95	1,300.58
900.00	11.75	1,299.78

FLOOD CONTROL DISTRICT of MARICOPA COUNTY 1959

FLOOD CONTROL DISTRICT of Maricopa County

Interoffice Memorandum

Orig Ground shots 11-8-84

Date of Survey 8-27-85

west 1300.5
East 1302.4
O.K.

SCS 5 Sections shown N & South

SCS Base

CMT. NO.	SUBJECT:	☐ FILE ☐ DESTROY
	TO: FROM:	DATE:

2 shots Easement line orig Gd. West

863+32 Brass Cap 1300.78	195 254 373 411	1300.4 toe 08.4 top Bank 09.7 top 02.4 toe OG	863+32	205 Lt & Easement line OG 1306. 411 East of E OG 1302.4
867+00 B.C. 1300.38	209 Lt 262 411 455	1300.8 09.2 TB 11.3 TB 02.2 Waste Area	867+00	205 Lt & E line 1300.2 455 Lt 1302.2 50'
870+53	195 Lt 258 411 451	1300.3 10.6 TB 11.1 TB 02.9 OG	870+53	205 Lt 1300.6 X 1800' 451 Lt 1302.9 175' 9' 450□' 2' 350□'
876	194 Lt 250 416 451	1300.1 09.9 10.9 00.8	876+00	205 Lt 1299.6 451 Lt 1300.8
880+00 1299.27	195 Lt 251 410 452	1299.4 09.1 10.9 00.9	880+	205 Lt 1299.4 452 Lt 1300.9
885+00	211 221 448 451	1301.5 03.2 03.3 01.8	885	205 Lt 1299.5 451 Lt 1301.8

1800± long
175'± wide top

Add Approx 50'+ & West Side of Waste Area

17 CY
600
10,200

11-21-86
FCD will have this area X-sectioned by Reg. Surveyor by Earl K. JE

6900-003
11/78

Waste Area along RWCD
Floodway Just South of
Chandler Heights Road

Brass Cap 10.74

Mat'l to be excavated and used to build farm service road between stations 820 & 835

Eddy T
Fuller

8-1-86
Clear Hot
8 AM

1st Row Brass Cap on East side of RWCD South of Chandler Heights Road bridge

10.8
11.1
11.0
} use rod reading of 11.0 for average Agri land elev.

Top of Waste area to be 6' above exist Agri land elev.

Use Rod reading of 5' to set daylight point around edge of Fill in Waste area

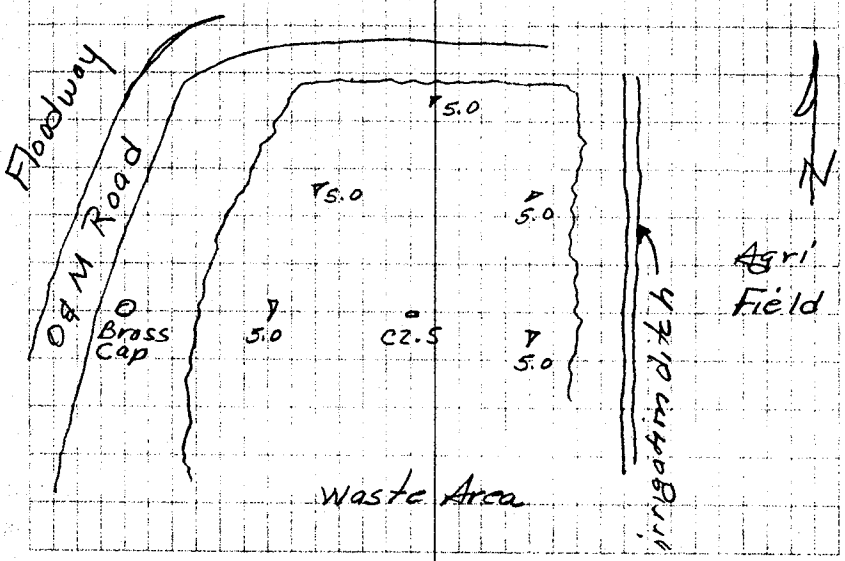

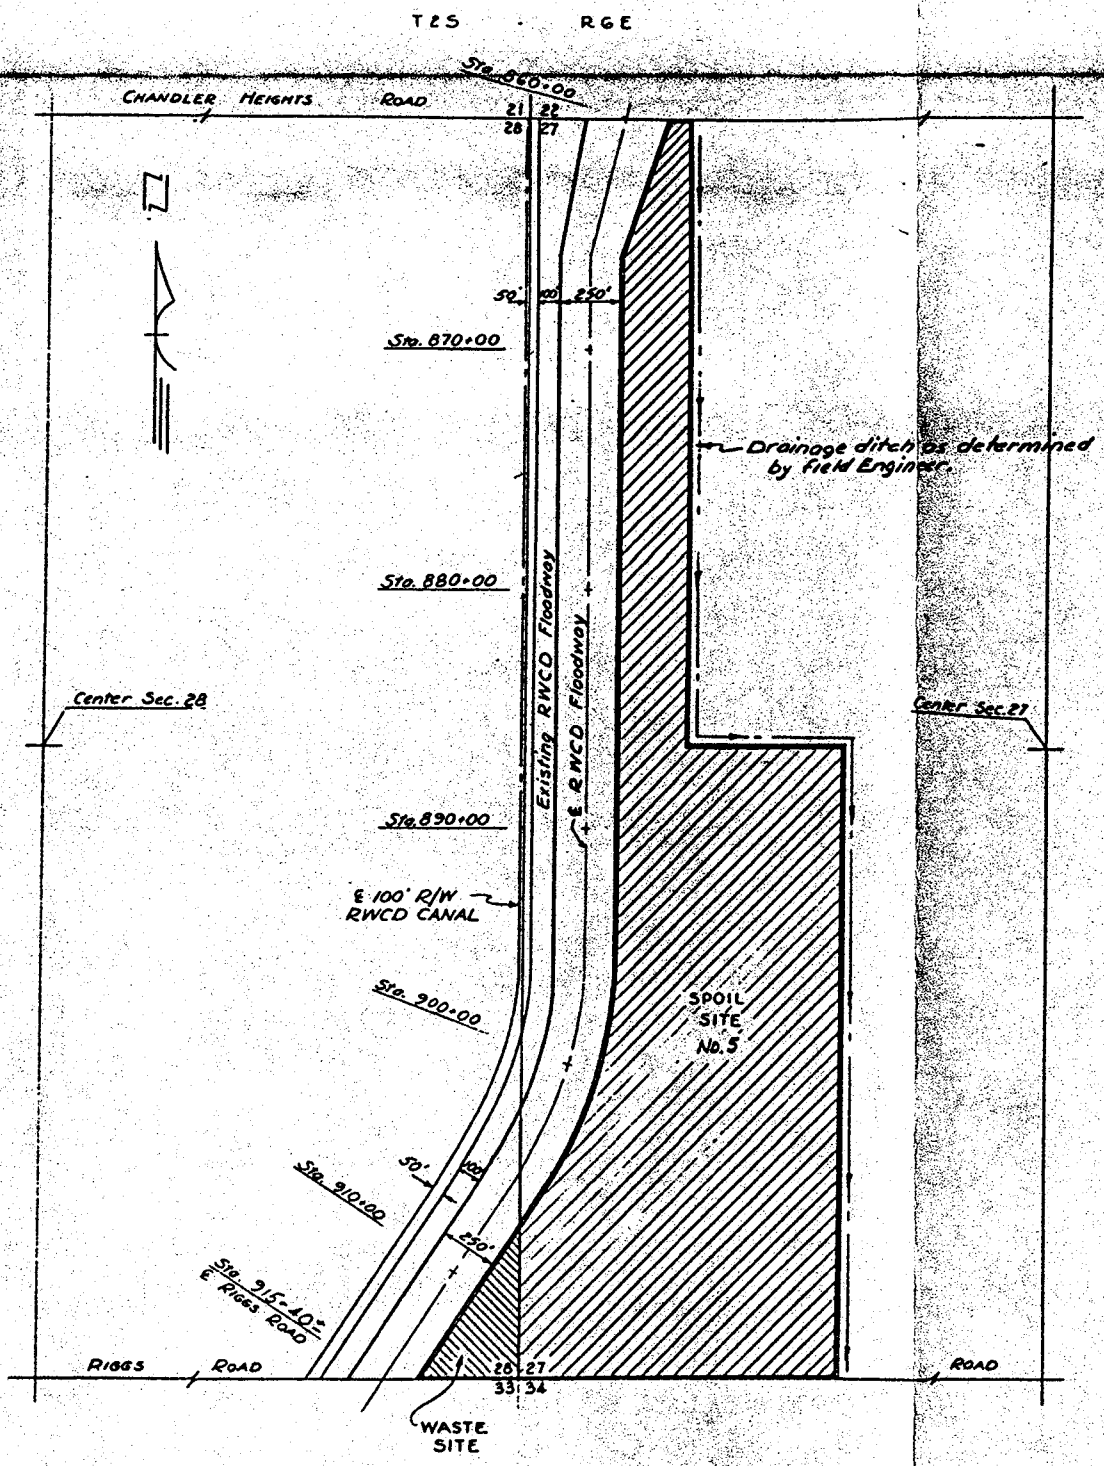

SPOIL DISPOSAL PLAN

Eddy

1-14-87

Joe of Brady called 4:05 PM

54,000 C.Y. to be removed (overshovel)

Joe wants you to call him in AM

Andy